


# Mars Series Half cell Modules

The power output shall not be less than 96.5% of the minimum power output stated in the product datasheet in the first year of the product's life cycle.

The loss of power output shall not exceed 0.7% per year thereafter, ending with 80.18% in the 25th year.

■ CSUN      ■ Standard warranty

CSUN's **NEW** linear performance warranty

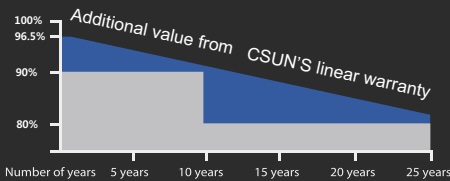

# CSUN 410-108M

High efficiency PERC tech for esthetic applications

Module Fire Performance: Type 1 (UL 1703)

Fire Resistance Rating: Class C (IEC 61730)

CSUN390-108M

CSUN395-108M

CSUN400-108M

CSUN405-108M

CSUN410-108M

CSUN415-108M

## 21.3%

Module efficiency

## 415W

Highest power output

## 10 Year

Material & workmanship warranty

## 25 Year

Linear power output warranty



Industry leading conversion efficiency



Certificated to withstand wind (2400Pa) and snow load (5400Pa)



Positive tolerance offer



Excellent performance under weak light condition



Passed salt mist & ammonia corrosion, blowing sand and hail testing



Good temperature coefficient enables better output in hot climates

All information and data are subject to change without notice and are provided without liability.

## Electrical Characteristics at Standard Test Conditions (STC)

Module Type	CSUN390-108M	CSUN395-108M	CSUN400-108M	CSUN405-108M	CSUN410-108M	CSUN415-108M
Maximum Power(Pmpp)[W]	390	395	400	405	410	415
Positive Power Tolerance[W]	±3%	±3%	±3%	±3%	±3%	±3%
Open Circuit Voltage(Voc)[V]	36.85	36.98	37.07	37.23	37.32	37.45
Short Circuit Current(Isc) [A]	13.61	13.70	13.79	13.87	13.95	14.02
Maximum Power Voltage(Vmpp)[V]	30.64	30.84	31.01	31.21	31.45	31.61
Maximum Power Current(Imp)[A]	12.73	12.81	12.90	12.98	13.04	13.13
Module Efficiency	20.0%	20.2%	20.5%	20.8%	21.0%	21.3%

Electrical data relates to standard test conditions(STC): irradiance 1000W/m<sup>2</sup>; AM1.5; cell temperature 25°C measuring uncertainty of power is within ±3%. Certified in accordance with IEC61215, IEC61730-1/2 and UL1703.

## Electrical Characteristics at Nominal Operating Cell Temperature(NOCT)

Module Type	CSUN390-108M	CSUN395-108M	CSUN400-108M	CSUN405-108M	CSUN410-108M	CSUN415-108M
Maximum Power(Pmpp)[W]	294	298	302	306	310	314
Open Circuit Voltage(Voc)[V]	34.62	34.75	34.88	35.12	35.23	35.37
Short Circuit Current(Isc) [A]	10.89	10.96	11.03	11.10	11.16	11.22
Maximum Power Voltage(Vmpp)[V]	28.87	29.08	29.26	29.47	29.72	29.89
Maximum Power Current(Imp)[A]	10.18	10.25	10.32	10.38	10.43	10.50

Electrical data relates to nominal operating cell temperature(NOCT): irradiance 800W/m<sup>2</sup>; wind speed 1m/s; cell temperature 45°C ambient temperature 20°C measuring uncertainty of power is within ±3%.

## Temperature Characteristics

Voltage Temperature Coefficient	-0.28%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.36%/°C

## Maximum Ratings

Maximum System Voltage(V)	1500
Series Fuse Rating(A)	15
Reverse Current Overload(A)	20

## Mechanical Characteristics

Dimensions	1724×1134×30mm - frame thickness upon request
Weight	20.5kg
Frame	Anodized aluminum profile-black frame upon request
Front Glass	Toughened low iron glass,3.2mm
Cell Encapsulation	EVA(Ethylene-Vinyl-Acetate)
Back Sheet	Composite film-black back sheet upon request
Cell	54×2 pieces
Junction Box	IP68, TUV&UL
Cable	4mm <sup>2</sup>
Connector	MC4/compatible with MC4


## Packaging

Container 20'	300pcs.
Container 40'HC	936pcs.

## System Design

Temp.Range	-40°F to +185°F(-40°C to +85°C)
Hail	Max. diameter of 0.98"(25mm)with impact speed of 51.2mph(23m/s)
Max.Capacity	Wind 2400Pa, snow 5400Pa-7200Pa upon request
Application Class	A
Safety Class	II

## Dimensions

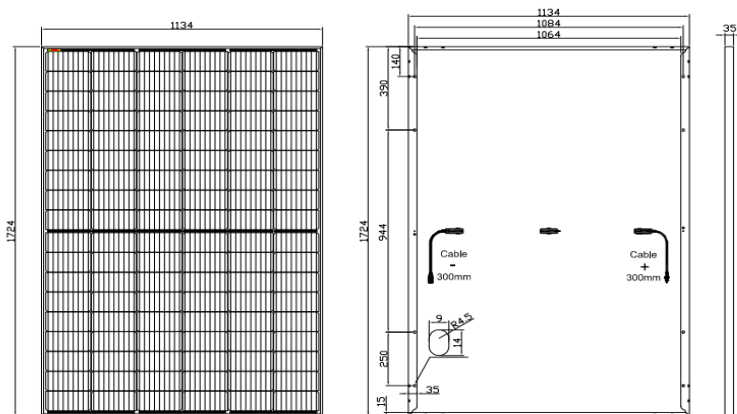

## I-V Curves

