


PowerWall–WALL MOUNTED



The battery is equipped with LED energy breathing light strip. When the battery pack is running, the light strip shows different colors according to different SOC conditions. Single battery pack is 5KWh.

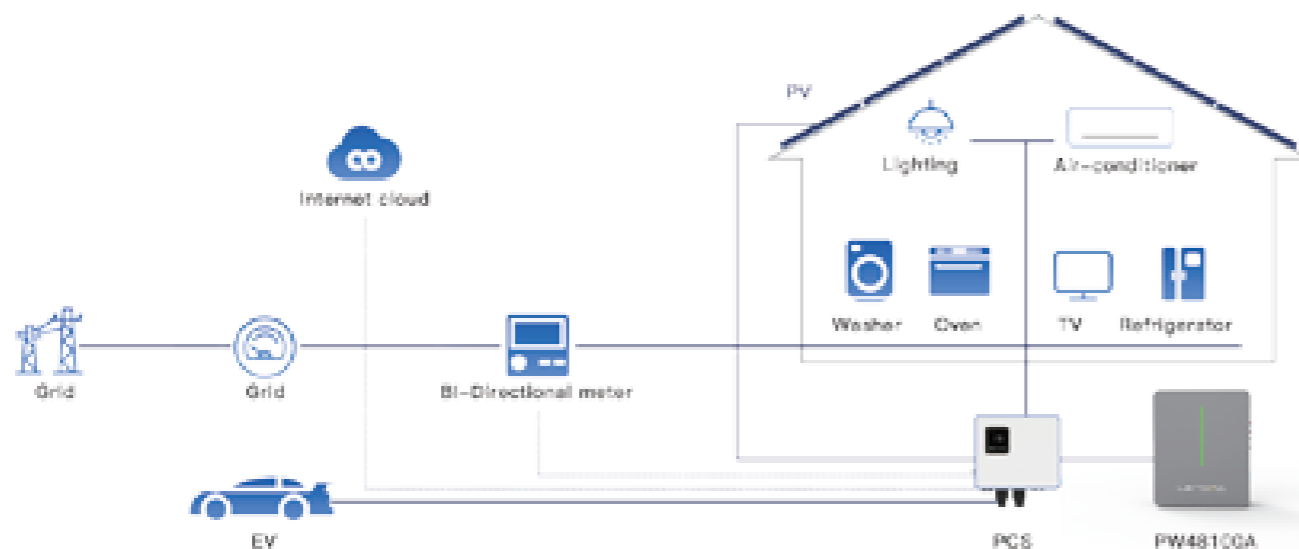

SPECIFICATION

Model	PW48100A
Rated power [Wh]	5120
Rated voltage [V]	51.2
Cell capacity [Ah]	100
Length [mm]	673±3
Width [mm]	473±3
Height [mm]	172±3
Weight [Kg]	46
Inner resistance [mΩ]	≤60
Max. charge voltage [V]	58.4
Discharge cut-off voltage [V]	46
Standard charging current [A]	20
Continuous discharge current [A]	50
Max. Cont. discharge current [A]	100
Standard charging temperature [°C]	0~55
Standard discharge temperature [°C]	-20~55
Standard storage temperature [°C]	-20~60
Cooling method	Natural cooling
Safety standard	UN38.3, MSDS
Storage humidity	5%~95%
Warranty [year]	5+5