



HESOLAR Pitched Tin Roof Mounting

Application Roof-Trapezoid Roof

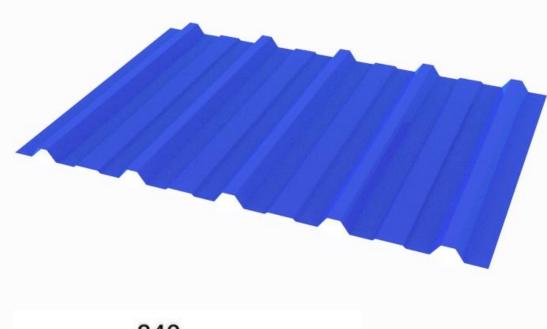



Feature:

- Pitched Tin Roof Mounting is designed for residential and commercial applications.
- This system allows installation on pitched roofs.
- Corrosion resistance is achieved through anodised structural grade aluminium and stainless steel components.

Paremeter:

- > Application: Pitch Tin Roof
- Max Building Height: Up to 20m(=65ft).
- Max Wind Speed: 60 m/s
- Snow Load: 1.4 KN/m2
- Material: Aluminum 6005-T5
- Warranty: 10 years warranty; 25 years service life.

Advantage:

- Durable
- Low-cost
- Easy installation
- Lightweight
- Reduce labor costs