

ATI high efficiency module size is easy to handle and specifically designed for large and small scale grid interactive applications.

ATI 's module uses state of the art multicrystalline technology with a Silicon Nitride (SiN) coating that enhances cell efficiency. Encapsulation beneath high transmission tempered glass is accomplished using an advanced, UV resistant thermal setting plastic. The encapsulant, ethylene vinyl acetate, cushions the solar cells within the laminate and protect the cells from etching. The rear surface of the module is completely sealed from moisture and mechanical damage by a continuous high strength polymer sheet.

ATI 's module incorporates a reinforced anodised aluminium frame, designed to meet ATI's High Quality Standards for corrosion resistance.

CERTIFICATION:

•ISO 9001



FEATURES:


*High power module using 156mm Multi-Crystalline photovoltaic solar cell

*36 Solar cells and connected in series

* Using Optical low iron tempered glass, EVA resin, module with aluminum frame for outdoor use

| Specification | |
|-----------------------------|--------------------------------|
| Maximum Power | 150W |
| Maximum Power Voltage (Vpm) | 19.5V |
| Maximum Power Current (Ipm) | 8.01A |
| Open Circuit Voltage (Voc) | 22.50V |
| Short Circuit Current (Isc) | 8.47A |
| Cell Type / # Cells | Multi-Crystalline 36 in series |
| Nominal Voltage | 12Vdc |
| Maximum System Voltage | DC 600V |
| Series Fuse Rating | 10A |
| Performance Tolerance | ±3% |
| Weight | 11.8kg / 25.96LBS |

• Limited warranty : 10 years

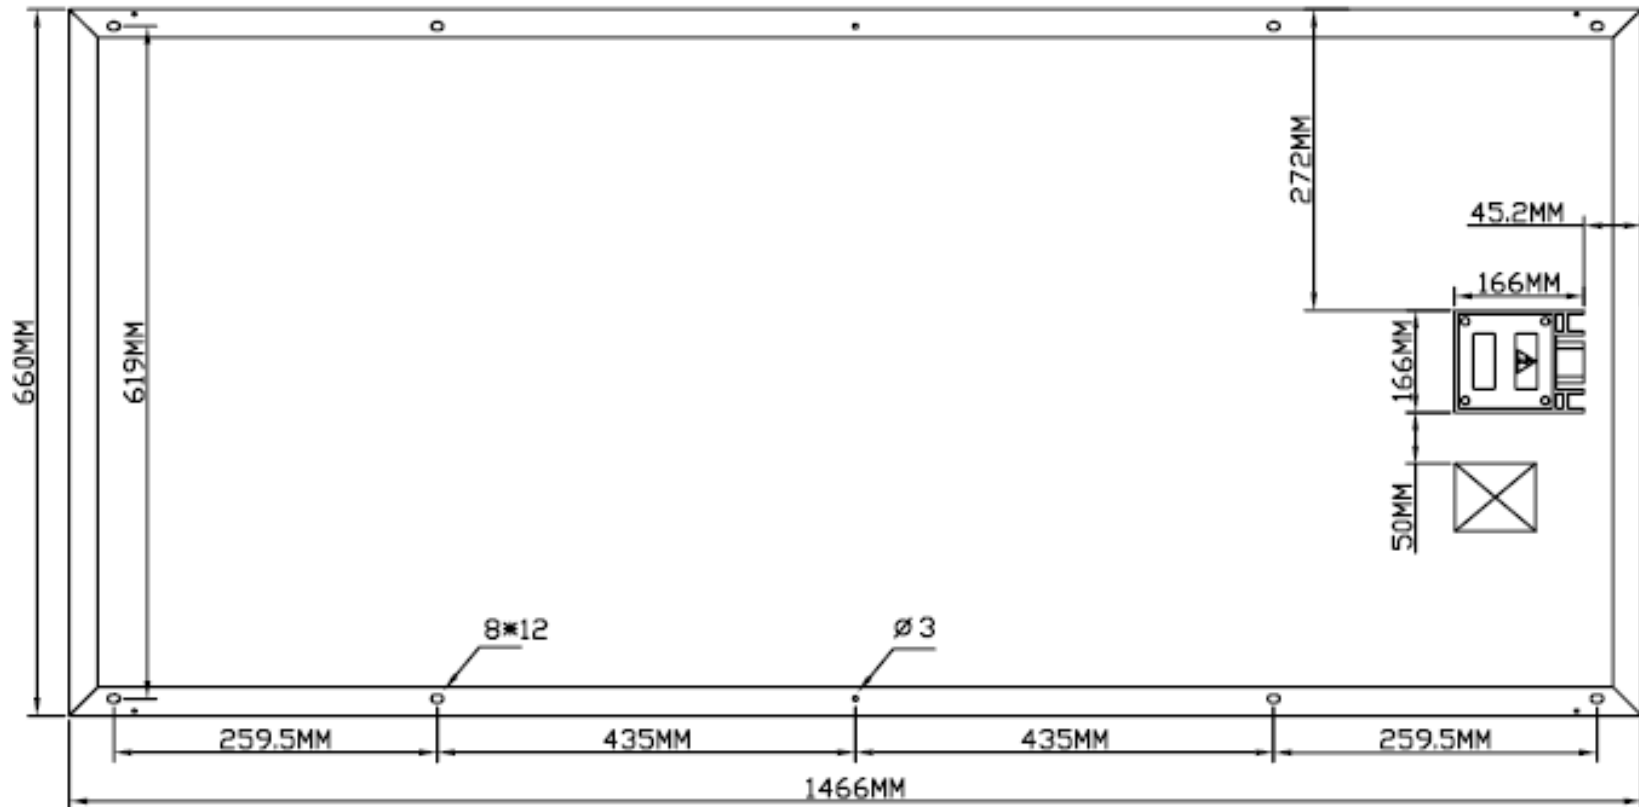

• Limited warranty : 10 years

3930-B Valley Blvd.
Walnut, CA 91789

Tel : (909)468-1800
Fax : (909)468-9880

<http://www.alpstechnologyinc.com>