


## Components



XHF-EC-40, 40mm end clamp

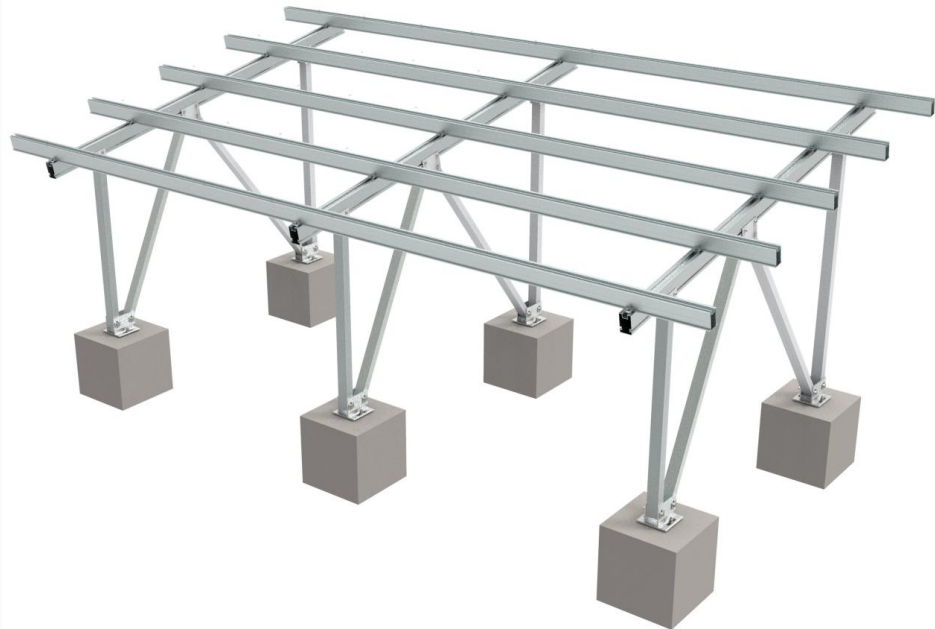

## Feature:

- XHFSolar Aluminum Ground Mounting is cost-effective solution for Open Field, it can be installed for home, residential or commercial project.
- Easy installation. Components pre-assembled into few units ensure fast installation.
- High pre-assembled make install efficient and easy structure is made by high quality Aluminum alloy.

## Parameters:

- Application: Open Filed
- Module Tilt Angle: 5-40 degree
- Max Wind Speed: 60 m/s
- Snow Load: 1.4 KN/m<sup>2</sup>
- Material: Aluminum 6005-T5
- Foundation: ground screw or concrete block Warranty: 10 years warranty; 25 years service life.
- Foundation: ground screw or concrete block

## Advantage:

- 1, Fast Installation: Most of parts is pre-assembled
- 2, Flexible Application: This system not only can be installed on ground screw for standard circumstance but also installed on concrete foundation for tricky terrain like soft or rocky ground.
- 3, Economical: The mounting structure is a cost effective mounting solution.
- 4, Long lifespan : All mounting structural components are made of high aluminum alloy, their high resistance to corrosion and complete recyclability.