

SolarEdge PV Module

Mono-Facial Module

PV540-R72JWML / PV555-R72JWML

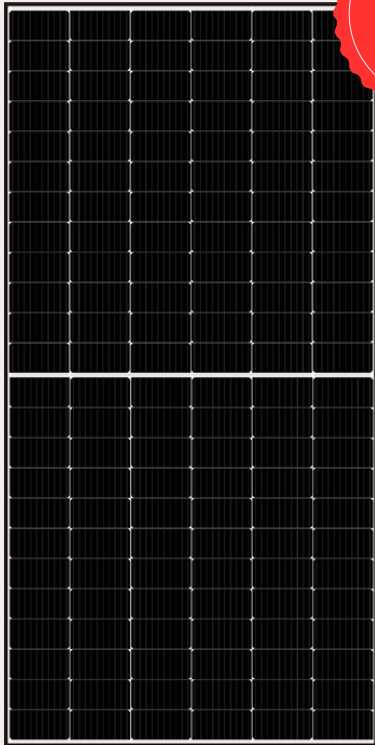

PV MODULE

Premium quality mono-facial module

- Superior module efficiency, quality, and long-term reliability with advanced M10 and P-PERC technologies, and full automatic production line
- Faster installations as high module power ratings result in fewer modules and cables
- Convenient single vendor solution from module to grid, for streamlined logistics, warranty and servicing
- Stable mechanical performance – withstands 5400Pa snow and 2400Pa wind loads
- Optimized size that is ideal for module transportation as well as solar tracking systems
- 25-year warranty - both for module and performance

/ SolarEdge PV Module

Mono-Facial Module

PV540-R72JWML / PV555-R72JWML


ELECTRICAL CHARACTERISTICS	PV540-R72JWML	PV555-R72JWML	
STC⁽¹⁾			
Max. Power (Pmax)	540	555	W
Open Circuit Voltage (Voc)	49.43	50.24	V
Short Circuit Current (Isc)	13.83	13.98	A
Voltage at Maximum Power (Vmp)	41.54	42.20	V
Current at Maximum Power (Imp)	13.00	13.17	A
Output Tolerance	0 – +5		W
NMOT⁽²⁾			
Max. Power (Pmax)	408.5	419.8	W
Open Circuit Voltage (Voc)	46.67	47.43	V
Short Circuit Current (Isc)	11.13	11.26	A
Voltage at Maximum Power (Vmp)	39.28	39.85	V
Current at Maximum Power (Imp)	10.40	10.54	A
Module Efficiency	20.90	21.48	%

(1) STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5.

(2) NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

OPERATIONAL PARAMETERS		
Operational Temperature	-40 to +85	°C
Power Output Tolerance	0 to +5	W
Voc and Pmax Measurement Tolerance	± 3	%
Isc Measurement Tolerance	± 5	%
Max. System Voltage	DC1500V (IEC/UL)	
Max. System Fuse Rating	25	A
Protection Class	Class II	
Fire Rating	Class C according to UL790	

MODULE MECHANICAL PROPERTIES		
Cells	144 (6 x 24)	
Cell Type	Monocrystalline PERC	
Cell Dimensions	182 x 91	mm
Dimensions (L x W x H)	2278 x 1134 x 35	mm
Output Cable	4mm ² , positive 1400 / negative 1400	mm
Front Side Maximum Load (Snow)	5400	Pa
Rear Side Maximum Load (Wind)	2400	Pa
Weight	28	kg
Front and Rear Glass	Single tempered glass, 3.2mm	
Frame	Anodized aluminum alloy frame	
Junction Box protection grade	IP68	
Connector Type	MC4	
Packaging Information (Pieces per pallet/container)	31/620	

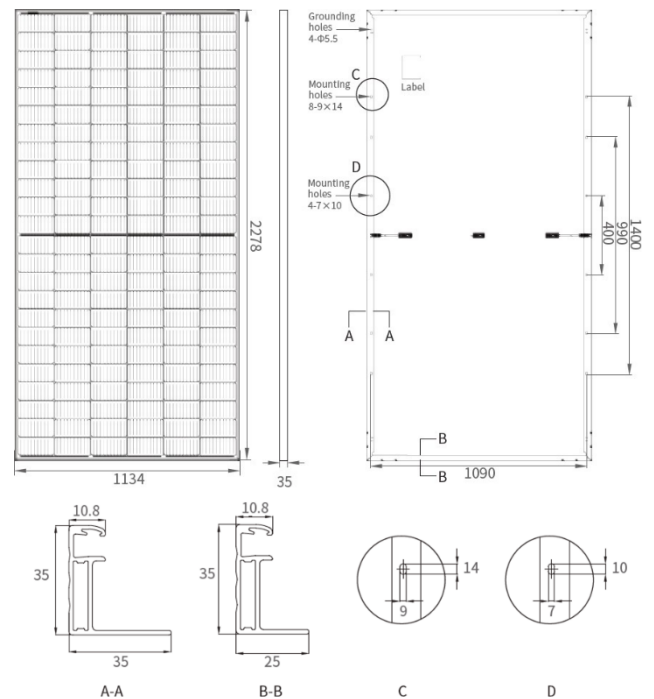

CERTIFICATIONS & WARRANTY		
Module Certifications	IEC 61215:2016, IEC61730	
Product Warranty	25-year module warranty	
Output Warranty of Pmax	25-year linear module warranty ⁽³⁾	

TEMPERATURE CHARACTERISTICS		
Temperature Coefficient Power (Pm)	-0.34	%/°C
Temperature Coefficient Voltage (Voc)	-0.29	%/°C
Temperature Coefficient Current (Isc)	0.04	%/°C
Operating Cell Temperature (NMOT)	43 ± 2	°C

(3) 1st year: 98%, 84.8% power output at year 25.

/ SolarEdge PV Module


Mono-Facial Module

PV540-R72JWML / PV555-R72JWML

Linear Warranty
25-Year Product Warranty
25-Year Linear Power Warranty



Panel I-V Curve

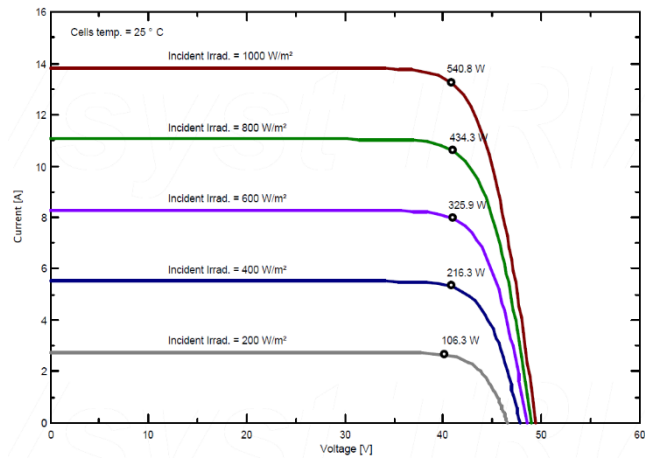

SolarEdge is a global leader in smart energy technology. By leveraging world-class engineering capabilities and with a relentless focus on innovation, SolarEdge creates smart energy solutions that power our lives and drive future progress.

SolarEdge developed an intelligent inverter solution that changed the way power is harvested and managed in photovoltaic (PV) systems. The SolarEdge DC optimized inverter maximizes power generation while lowering the cost of energy produced by the PV system.

Continuing to advance smart energy, SolarEdge addresses a broad range of energy market segments through its PV, storage, EV charging, UPS, and grid services solutions.

-  SolarEdge
-  @SolarEdgePV
-  @SolarEdgePV
-  SolarEdgePV
-  SolarEdge
-  www.solaredge.com/corporate/contact

solaredge.com

© SolarEdge Technologies, Ltd. All rights reserved. SOLAREEDGE, the SolarEdge logo, OPTIMIZED BY SOLAREEDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks mentioned herein are trademarks of their respective owners.

Date: January 23, 2023 DS-000151-ENG-ISR
Subject to change without notice.

Cautionary Note Regarding Market Data and Industry Forecasts: This brochure may contain market data and industry forecasts from certain third-party sources. This information is based on industry surveys and the preparer's expertise in the industry and there can be no assurance that any such market data is accurate or that any such industry forecasts will be achieved. Although we have not independently verified the accuracy of such market data and industry forecasts, we believe that the market data is reliable and that the industry forecasts are reasonable.



solaredge