


Lumina I

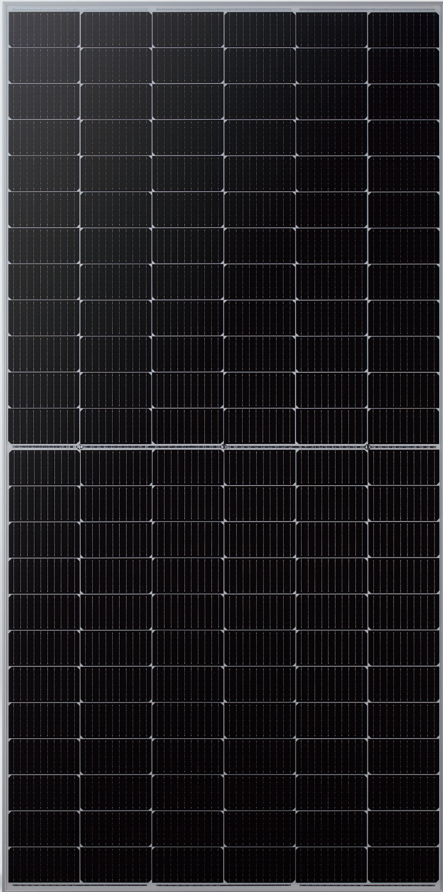

555W

Maximum Power Output

21.5%

Maximum Module Efficiency

SolarSpace Technology Co., Ltd. was established in 2011, as a world leading solar cell and module manufacturer, concentrating on high efficient solar-technology production with 30GW+ capacity of solar cell and 5.7GW capacity of solar module in China and overseas.

SS8-72HD 530-555M-IND

Bifacial Dual Glass Module



High Power Output

Solarspace efficient cells with MBB and high-density encapsulation ensures higher power output



High Reliability

Excellent harsh tests results and advanced half-cell tech improve product reliability for long-term life cycle




More Power Generation

Gallium doped wafers reduce annual power degradation, optimized circuit design ensures more power generation under shading



High ROI

Bifacial power generation reduces BOS and system LCOE dramatically, promoting the project ROI

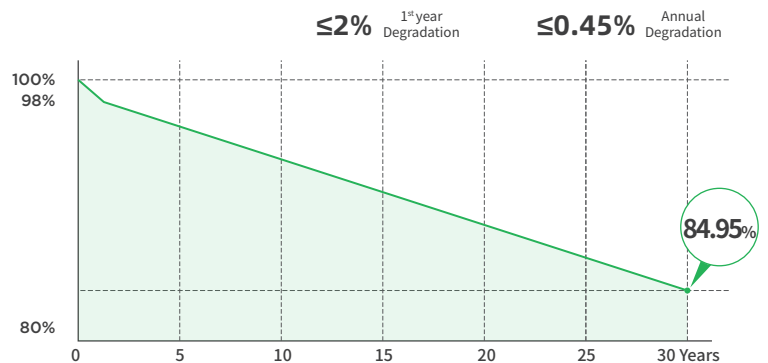

12 Years Product Warranty **30** Years Linear Power Warranty

Comprehensive Certificates

- IEC61701
- IEC62716
- DINEN60068-2-68
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational Health and Safety Management Systems



Electric Characteristics STC: Irradiation 1000W/m², Cell Temperature 25°C, AM=1.5

Module Type	SS8-72HD -535M-IND		SS8-72HD -540M-IND		SS8-72HD -545M-IND		SS8-72HD -550M-IND		SS8-72HD -555M-IND	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax) [W]	535	405	540	408	545	412	550	416	555	420
Open-Circuit Voltage (Voc)[V]	49.44	46.31	49.61	46.43	49.76	46.55	49.91	46.68	50.03	46.84
Maximum Power Voltage (Vmp) [V]	41.46	38.84	41.65	39.00	41.81	39.21	41.97	39.44	42.15	39.67
Short-Circuit Current (Isc)[A]	13.78	11.05	13.85	11.10	13.92	11.13	14.02	11.18	14.07	11.22
Maximum Power Current (Imp) [A]	12.90	10.43	12.97	10.47	13.04	10.51	13.10	10.55	13.17	10.59
Module Efficiency	20.71%		20.90%		21.10%		21.29%		21.48%	
Power Tolerance	0~+5W									
Temperature coefficient of Isc	+0.045%/°C									
Temperature coefficient of Voc	-0.275%/°C									
Temperature coefficient of Pmax	-0.350%/°C									


Bifacial Output-Rearside Power Gain (545 W)

	5%	10%	15%	20%	25%
Power Gain	5%	10%	15%	20%	25%
Maximum Power (Pmax) [W]	572	600	627	654	681
Open-Circuit Voltage (Voc)[V]	49.77	49.77	49.77	49.87	49.87
Maximum Power Voltage (Vmp) [V]	41.81	41.82	41.82	41.92	41.92
Short-Circuit Current (Isc)[A]	14.59	15.29	15.99	16.68	17.37
Maximum Power Current (Imp) [A]	13.69	14.35	15.01	15.64	16.26

Mechanical Characteristics

Cell Type	Mono PERC (M10)
Number of Cells	144(6x24)
Dimensions	2278X1134X35mm
Weight	31.0kg
Glass	Front Glass, 2.0mm AR coated tempered glass Back Glass, 2.0mm glazed tempered glass
Frame	Silver, Anodized Aluminum Alloy
Output Cables	4mm ² (IEC),12AWG(UL) 300mm (including connector) or Customized Length
Junction Box	IP68 Rated, 3 diodes
Connector	MC4-EVO2 or MC4 Compatible
Packaging	31 Pieces/Pallet, 620 pieces/40' container

Engineering Design

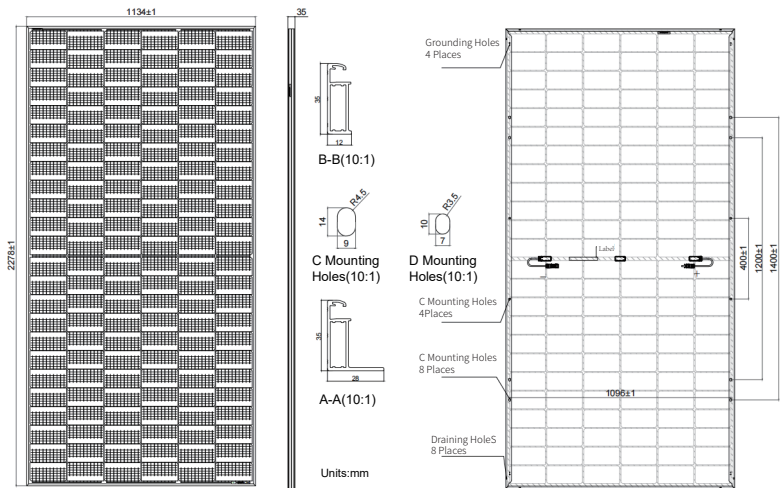

Operating Conditions

Maximum System Voltage	1500V DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	25A
Mechanical Load Front Rear	5400Pa
Mechanical Load Back Rear	2400Pa
Nominal operating cell temperature	45±2°C
Bifaciality	70±10%

Characteristics

