



### Main Features



#### Building materials design idea

Designed as per green building materials idea  
30-Year power output



#### Half-cut technology

Increase power output, reduce cracking risks,  
improve module reliability



#### Easy Installation

The module design is easy for installation and could  
achieve a flat & full installation.

### Product Certificates



### Contact us

Tel : +86 27 87801237

Email : info@rixinsolar.com

www.rixinsolar.com.cn

# Poly Double Glass Module (framed)

MDM280(K)~MDM290(K)

## Electrical performance parameters

Model	MDM280(K)	MDM285(K)	MDM290(K)
Maximum power (Pm/Wp)	280	285	290
Maximum power voltage (Vmp/V)	31.5	31.7	31.9
Maximum power current (Imp/A)	8.9	9.00	9.10
Open circuit voltage (Voc/V)	37.5	37.6	37.7
Short circuit current (Isc/A)	9.70	9.80	9.90
Module efficiency (%)	16.6	16.9	17.2

## Mechanical performance parameters

Cell Nos & array	Poly half-cut cells 120 (6*10*2)
Cable	4mm <sup>2</sup> , negative1200mm, positive1200mm
Module weight(kg)	20
Module dimension(L*W*H)(mm)	1690*998*30mm
Packing	30pcs/pallet

## Quality parameters

Module working temperature range (°C)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	15
NOCT(°C)	45±2
Front/rear static loads(Pa)	2400/3600
Junction box/Connector	Ip68, split/MC4 compatible

## Temperature coefficient (STC)

Temperature coefficient of Voc	-0.31%/°C
Temperature coefficient of Isc	+0.05%/°C
Temperature coefficient of Pm	-0.41%/°C

Test condition: irradiance=(1+0.1BIF)1000W/m<sup>2</sup>, ambient temperature=25°C, AM=1.5

## Quality warranty



10-year materials&workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.

The parameters in this sheet are subject to change without prior notice.

## Module dimension (mm)

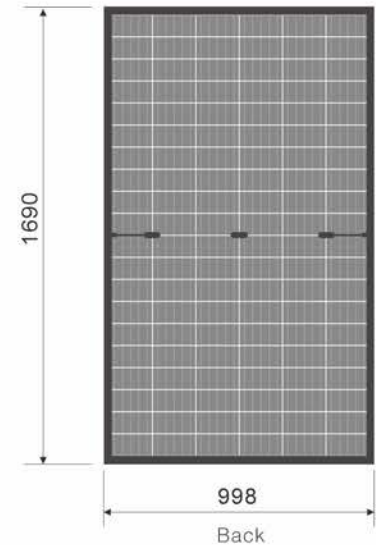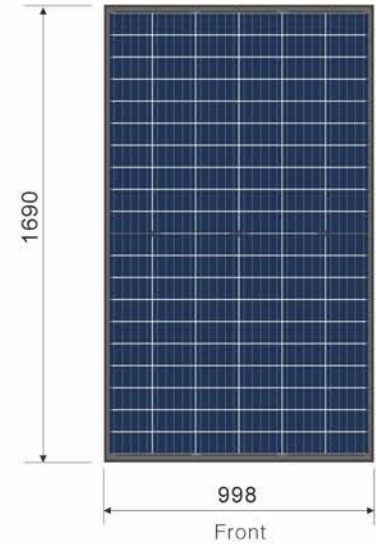

## I-Vcurve (290W)

