



Main Features



Building materials design idea

Designed as per green building materials idea
30-Year power output



Half-cut technology

Increase power output, reduce cracking risks,
improve module reliability



Easy Installation

The module design is easy for installation and could
achieve a flat & full installation.

Product Certificates



Contact us

Tel : +86 27 87801237

Email : info@rixinsolar.com

www.rixinsolar.com.cn

Poly Double Glass Module (frameless)

MDM280~MDM290

Electrical performance parameters

Model	MDM280	MDM285	MDM290
Maximum power (Pm/Wp)	280	285	290
Maximum power voltage (Vmp/V)	31.5	31.7	31.9
Maximum power current (Imp/A)	8.9	9.00	9.10
Open circuit voltage (Voc/V)	37.5	37.6	37.7
Short circuit current (Isc/A)	9.70	9.80	9.90
Module efficiency (%)	16.8	17.10	17.4

Mechanical performance parameters

Cell Nos & array	Poly half-cut cells 120 (6*10*2)
Cable	4mm ² , negative1000mm, positive1000mm
Module weight(kg)	19
Module dimension(L*W*H)(mm)	1684*992*5mm
Packing	33pcs/pallet

Quality parameters

Module working temperature range (°C)	-40~+85
Power tolerance (W)	0~+5
Maximum system voltage (V)	DC1500
System maximum protection current (A)	15
NOCT(°C)	45±2
Front/rear static loads(Pa)	2400/2400
Junction box/Connector	Ip68, split/MC4 compatible

Temperature coefficient (STC)

Temperature coefficient of Voc	-0.31%/°C
Temperature coefficient of Isc	+0.05%/°C
Temperature coefficient of Pm	-0.41%/°C

Test condition: irradiance=(1+0.1BIFI)1000W/m², ambient temperature=25°C, AM=1.5

Quality warranty



10-year materials&workmanship warranty

30-year linear power warranty

Attention:Read safety and installation instructions before using.

The parameters in this sheet are subject to change without prior notice.

Module dimension (mm)

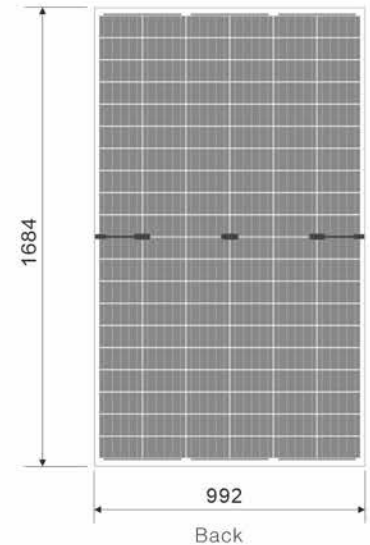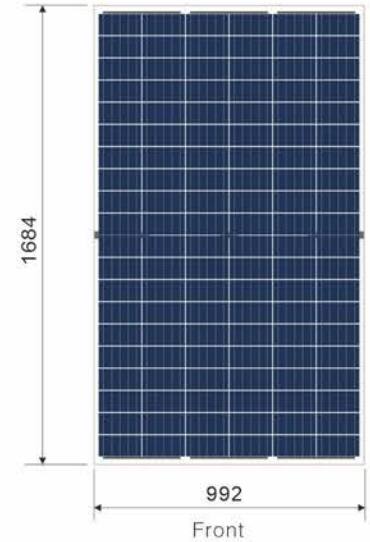

I-Vcurve (290W)

