


MONOCRYSTALLINE SILICON **MODULE**



M6-220 M6-230 M6-240 MONOCRYSTALLINE SILICON MODULE

Products Characteristics

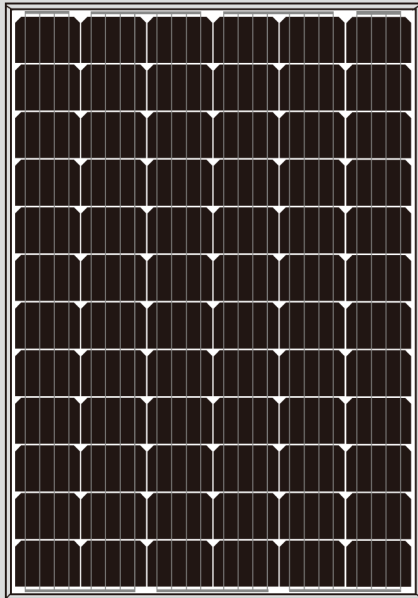

Widely using of the most popular and mature type of modules for off-grid system.



Leading manufacturing technology in PV industry, strictly controlling the quality of raw materials and the process of producing



100% EL inspection, ensures modules are defects free.



Cells binned by current to improve module performance



Anti reflective glass. Not only to increase the light absorption, but also to make the module has the function of self-cleaning in water environment, effectively reducing the power loss caused by dust.



Outstanding performance in low-light irradiance environments.



Excellent mechanical load resistance: Certified to withstand high wind loads(2400pa) and snow loads(5400pa).



High salt and ammonia resistance



Positive power tolerance: 0~+5w



10 years
products
warranty

25 year
power output
warranty

Add: RM 1611B 16/F HO KING COMM CTR,2-16
FA YUEN ST MONGKOK KLN, HONG KONG
Factory Add: HENGLIN TOWN, WUJINDISTRICT
DISTRICT, CHANGZHOU, JIANG SU, CHINA
Tel: +852 3069 6900
Mail: info@linkingsolar.com

Warranty

- 10 years product warranty
- 10-years 90% of Min. rated output power, and 25-years 80% of Min. rated output power warranty

Comprehensive Certificates


- ISO Certificate
- SGS-TUV Certificate
- CQC Certificate
- IEC61215、IEC61730 Certificate
- CE Certificate

Specifications subject to technology and test conditions,
LINKING SOLAR reserves the right of final interpretation


M6-220 M6-230 M6-240



Engineering Drawings(Front Side)

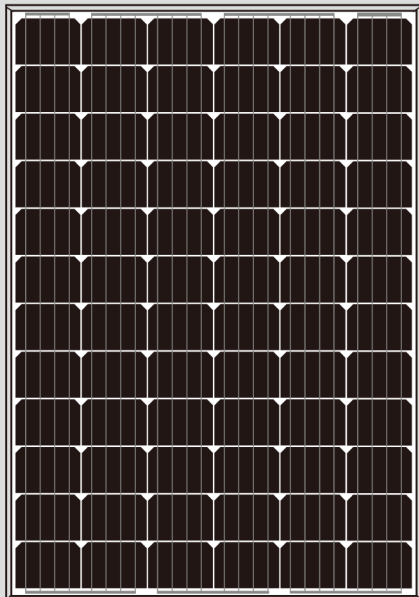

Engineering Drawings(Back Side)

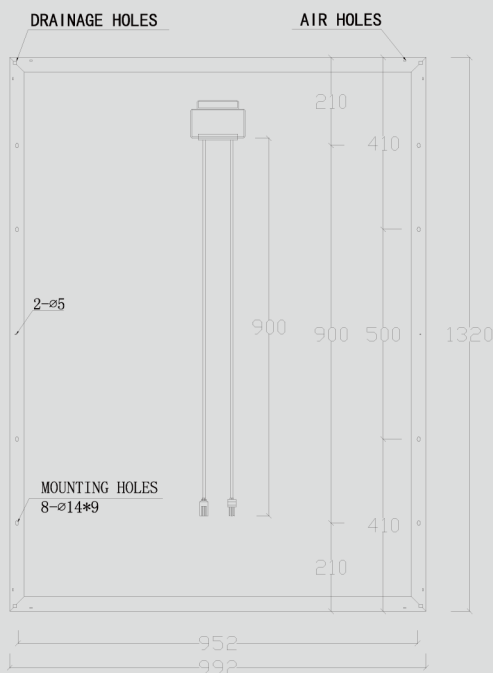

Add: RM 1611B 16/F HO KING COMM CTR,2-16
 FA YUEN ST MONGKOK KLN, HONG KONG
Factory Add: HENGLIN TOWN, WUJINDISTRICT
 DISTRICT, CHANGZHOU, JIANG SU, CHINA
Tel: +852 3069 6900
Mail: info@linkingsolar.com

Raw materials and Mechanical Parameters

	6M-220	6M-230	6M-240
Type of Cells(mm)	mono156 × 104		
NO. of Cells and Connections	6 × 12=72		
Dimensions(mm)(L*W*H)	1320 × 992 × 35/40		
Weight(kg)	14.9/15.2		
Glass	3.2mm Tempered Glass		
Encapsulation	EVA		
Backsheet	Multilayer Composite		
Aluminium-Frame	Silvery/Black Anodized aluminium alloy		
Junction-Box	IP65/IP67		
Cable	4mm ² ,900mm		
Connector	MC4 and MC4 Compatible		
Package Configuration	30/26pcs/pallet		

Performance Parameters

	6M-220	6M-230	6M-240
Maximum System Voltage	1000V		
Operating Temperature	-45~+80°C		
Maximum Series Fuse	10A		
Maximum Static Load,Front Side (e.x. Snow,Wind)	5400Pa		
Maximum Static Load, Back Side(e.x. Wind)	2400Pa		
Application Grade	Class A		

Electrical Parameters (standard Test Condition)

	6M-220	6M-230	6M-240
Rated Maximum Power(Mp)	220W	230W	240W
Power Tolerance	0~ +5W		
Cell Efficiency	19.2%	19.9%	20.7%
Open Circuit Voltage(Voc)	47.0V	47.2V	47.5V
Maximum Power Voltage(Vmp)	38.4V	38.6V	38.8V
Short Circuit Current(Isc)	6.07A	6.32A	6.56A
Maximum Power Current(Imp)	5.73A	5.96A	6.19A
Temperature Coefficient of Isc	+0.06%		
Temperature Coefficient of Voc	-0.32%		
Temperature Coefficient of Pmp	-0.45%		
Standard Test Condition	Irradiance:1000W/M2,Cell Temperature:25°C,Spectrum AM:1.5		

The Electrical Parameters of the module are the average theory figure under the standard test condition, each one exists difference. Can not be treated as the basis of module delivery.