

CAPRICORN

ReneSola

BIFACIAL MODULE WITH DUAL GLASS

RSC-555~575MBG-E1


P-Type /Positive power tolerance of 0~+3%/Max module efficiency 21.27%

- Suitable for ground power plants and distributed projects
- Advanced module technology delivers superior module efficiency
 - Gallium-doped Wafer · Non destructive cutting · MBB half-cut
- Excellent power generation performance
 - Excellent IAM and Weak light response · Low temperature ratings
 - 0.45% linear Power decline
- High module quality ensures long-term reliability
 - Strict selected material · Advanced technology · Leading standard
- Ultra-hydrophilic self-cleaning coating techniques



Complete System
and IEC Product Certification

IEC 61215(2016), IEC 61730(2016) ISO9001:
2015:Quality Management System ISO14001:
2015:Environment Management System
ISO45001:2018:Occupational Health
and Safety Management System

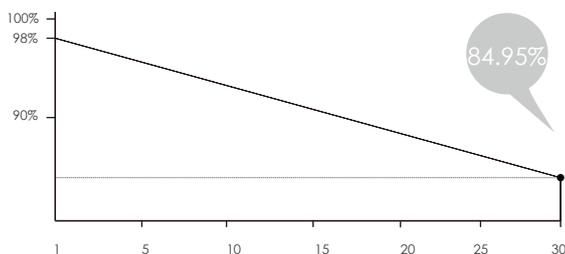


30-Year excess linear power output warranty





CAPRICORN

RSC-555~575MBG-E1

BIFACIAL MODULE WITH DUAL GLASS

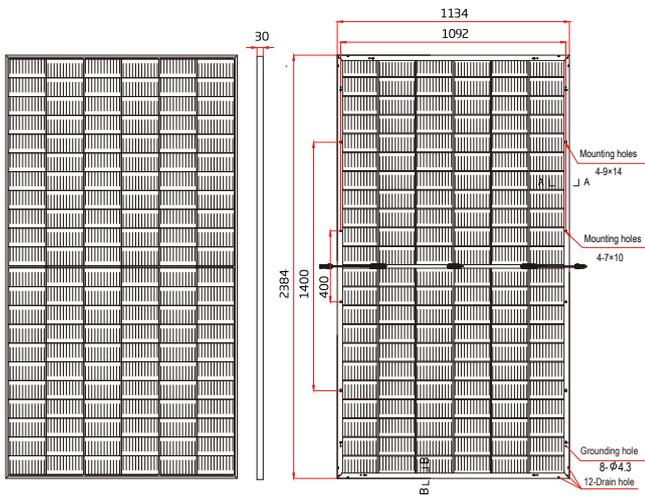

Drawing Only for Reference

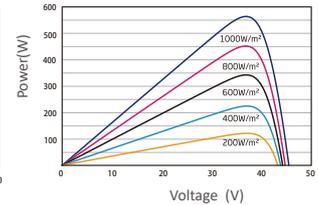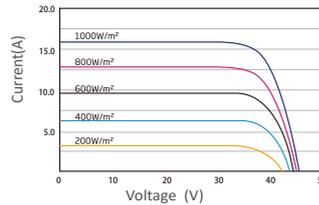

Electrical Characteristics STC	RSC-555MBG-E1	RSC-560MBG-E1	RSC-565MBG-E1	RSC-570MBG-E1	RSC-575MBG-E1
Maximum Power (Pmax)	555W	560W	565W	570W	575W
Power Tolerance	0~+5W	0~+5W	0~+5W	0~+5W	0~+5W
Module Efficiency	20.53%	20.71%	20.90%	21.08%	21.27%
Maximum Power Current (Imp)	14.72A	14.76A	14.80A	14.84A	14.87A
Maximum Power Voltage (Vmp)	37.70V	37.90V	38.20V	38.40V	38.70V
Short Circuit Current (Isc)	15.80A	15.86A	15.90A	15.93A	15.97A
Open Circuit Voltage (Voc)	45.00V	45.20V	45.50V	45.70V	46.00V

Values at Standard Test Conditions STC(AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Electrical Characteristics NOCT	RSC-555MBG-E1	RSC-560MBG-E1	RSC-565MBG-E1	RSC-570MBG-E1	RSC-575MBG-E1
Maximum Power (Pmax)	420W	424W	428W	431W	436W
Maximum Power Current (Imp)	12.07A	12.12A	12.15A	12.18A	12.22A
Maximum Power Voltage (Vmp)	34.80V	34.90V	35.20V	35.40V	35.70V
Short Circuit Current (Isc)	12.73A	12.78A	12.81A	12.84A	12.87A
Open Circuit Voltage (Voc)	42.40V	42.60V	42.80V	43.00V	43.30V

NOCT , Irradiance of 800W/m², AM1.5, Ambient Temperature 20 °C, wind Speed 1m/s.

Electrical Characteristics with 21% rear side power gain	RSC-555MBG-E1	RSC-560MBG-E1	RSC-565MBG-E1	RSC-570MBG-E1	RSC-575MBG-E1
Maximum Power (Pmax)	671.6W	677.6W	683.7W	689.7W	695.8W
Maximum Power Current (Imp)	17.81A	17.88A	17.90A	17.96A	17.98A
Maximum Power Voltage (Vmp)	37.70V	37.90V	38.20V	38.40V	38.70V
Short Circuit Current (Isc)	19.07A	19.16A	19.20A	19.29A	19.33A
Open Circuit Voltage (Voc)	45.00V	45.20V	45.50V	45.70V	46.00V

Mechanical Characteristics

Cell Type	MonoP-Type, 132 (6x22) Half-Cut cells
Glass	2mm+2mm, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminum Alloy
Junction Box	1P68 Rated, With Bypass Diodes
Dimension	2384×1134×30mm
Output Cable	4 mm2 (EU), 300 mm, length can be customized
Weight	33.7kg
Installation Hole Location	See Drawing Above

Packing Information

Container	40' HQ
Pallets per Container	20
Pieces per Container	720

Characteristics

Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	+0.04%/°C
Temperature Coefficient of Pmax	-0.34%/°C
Nominal Operating Cell Temperature (NOCT)	45°C±2°C

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

Maximum Ratings

Operating Temperature	-40°C ~ +85°C
Maximum System Voltage	1500VDC
Maximum Series Fuse Rating	35A

