



CDZ-S132/M12H-xxx-BG 640-670W

210mm Cells Half-Cut Bifacial Glass/Glass Series



Quality Guarantee

15-Year Warranty for Materials and Processing
30-Year Warranty for Extra Linear Power Output



High customer value

Lower LCOE (Levelized Cost Of Energy), reduced BOS (Balance Of System) cost, shorter payback time
Lower guaranteed first year and annual degradation
Designed for compatibility with existing mainstream system components
Higher return on Investment



High power up to 670W

Large area cells based on 210mm silicon wafers and half-cut cell technology
Up to 21.6% module efficiency with high density interconnect technology
Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



High reliability

Minimized micro-cracks with innovative non-destructive cutting technology Ensured PID resistance through cell process and module material control Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity areas. Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load




High energy yield

Excellent IAM (Incident Angle Modifier) and low irradiation performance, validated by 3rd party certifications
The unique design provides optimized energy production under inter-row shading conditions


Complete System and Product Certifications

IEC 61215, IEC 61730
ISO 9001: 2015: ISO Quality Management System
ISO 14001: 2015: ISO Environment Management System
ISO 45001: 2018: Occupational Health and Safety

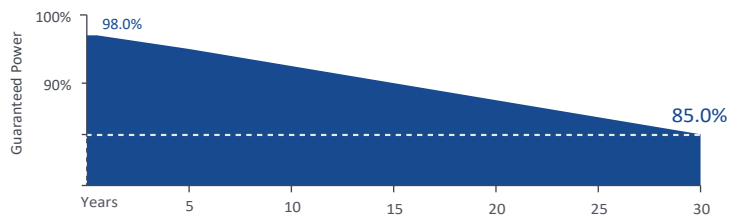


CDZ-S132/M12H-xxx-BG


DIMENSIONS OF PV MODULE(mm)

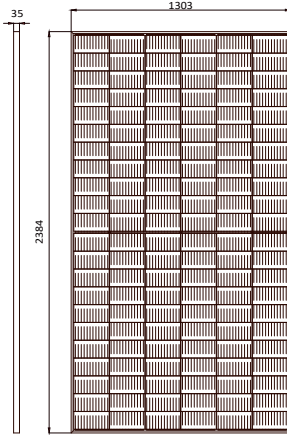


Front View

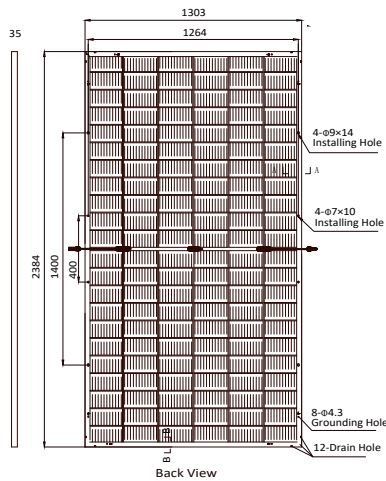


Back View



I-V CURVES OF PV MODULE(645W)

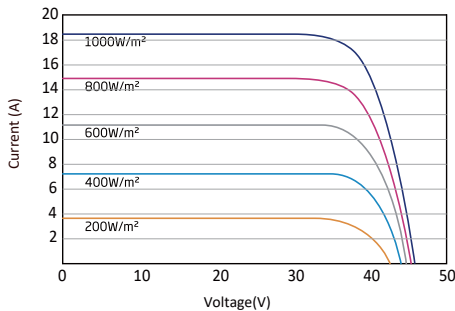

P-V CURVES OF PV MODULE(645W)

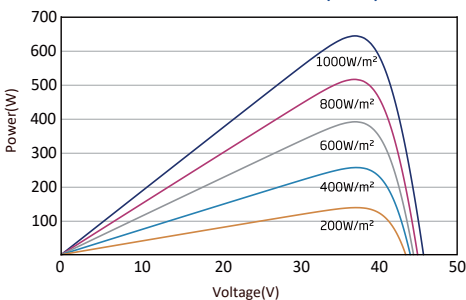

ELECTRICAL DATA (STC)

Peak Power Watts- P_{MAX} (Wp)*	640	645	650	655	660	665	670
Maximum Power Voltage- V_{MP} (V)	37.3	37.5	37.7	37.9	38.1	38.3	38.5
Maximum Power Current- I_{MP} (A)	17.19	17.23	17.27	17.31	17.35	17.39	17.43
Open Circuit Voltage- V_{OC} (V)	45.1	45.3	45.5	45.7	45.9	46.1	46.3
Short Circuit Current- I_{SC} (A)	18.26	18.31	18.35	18.40	18.45	18.50	18.55
Module Efficiency η_m (%)	20.6	20.8	20.9	21.1	21.2	21.4	21.6
Power Tolerance(W)							0~+5

STC:Irradiance 1000W/m², module temperature 25°C, AM=1.5,*Measuring tolerance: ±3%

ELECTRICAL DATA (NMOT)

Maximum Power- P_{MAX} (Wp)	484	488	492	495	499	504	508
Maximum Power Voltage- V_{MP} (V)	34.7	34.9	35.1	35.2	35.4	35.6	35.8
Maximum Power Current- I_{MP} (A)	13.94	13.98	14.01	14.05	14.10	14.16	14.20
Open Circuit Voltage- V_{OC} (V)	42.5	42.7	42.9	43.0	43.2	43.4	43.6
Short Circuit Current- I_{SC} (A)	14.71	14.75	14.79	14.83	14.87	14.91	14.95

NMOT:Irradiance 800W/m², ambient temperature 20°C, AM=1.5, wind speed 1m/s

Electrical characteristics with different power bin (reference to 10% Irradiance ratio)

Maximum Power- P_{MAX} (Wp)	685	690	696	701	706	712	718
Maximum Power Voltage- V_{MP} (V)	37.3	37.5	37.7	37.9	38.1	38.3	38.5
Maximum Power Current- I_{MP} (A)	18.39	18.44	18.48	18.52	18.56	18.60	18.65
Open Circuit Voltage- V_{OC} (V)	45.1	45.3	45.5	45.7	45.9	46.1	46.3
Short Circuit Current- I_{SC} (A)	19.54	19.59	19.63	19.69	19.74	19.79	19.84
Irradiance ratio (rear/front)	10 %						

Power Bifaciality: 70±5%

MECHANICAL DATA

Solar Cells	Monocrystalline
No.of cells	210x105mm 132pcs
Module Dimensions	2384x1303x35mm
Weight	38.7 kg
Glass	2.0 mm, High Transmission, AR Coated Heat Strengthened Glass
Encapsulant Material	EVA/POE
Back Glass	2.0mm, Heat Strengthened Glass (White Grid Glass)
Frame	35 mm Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² Cable length 350mm or customized length
Connector	MC4 Compatible

TEMPERATURE RATINGS

NMOT (Nominal Module Operating Temperature)	43°C(±2°C)
Temperature Coefficient of P_{max}	- 0.34%/°C
Temperature Coefficient of V_{oc}	- 0.25%/°C
Temperature Coefficient of I_{sc}	0.04%/°C

(Do not connect Fuse in Combiner Box with two or more strings in parallel connection)

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	35A

WARRANTY

15 year Product Workmanship Warranty
30 year Power Warranty
2% first year degradation
0.45% Annual Power Attenuation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 31 pieces
Modules per 40' container: 558 pieces