




Qoltec Modular Hybrid Solar Inverter Off-Grid 8kW | 120A | 48V | MPPT | Sinus

Product code: 53889

The off-grid hybrid inverter converts the energy created by PV modules into energy needed to power electrical appliances. It works as a solar charger and battery charger. Equipped with a multifunctional LCD display that records operating data allowing continuous monitoring and management of the entire system. The inverter operates in off-grid mode.

It has a built-in 120A MPPT charge controller and Wi-fi. Possible to increase system capacity to 48kW by connecting 6 units in parallel.

HOW DOES THE OFF-GRID HYBRID INVERTER WORK?

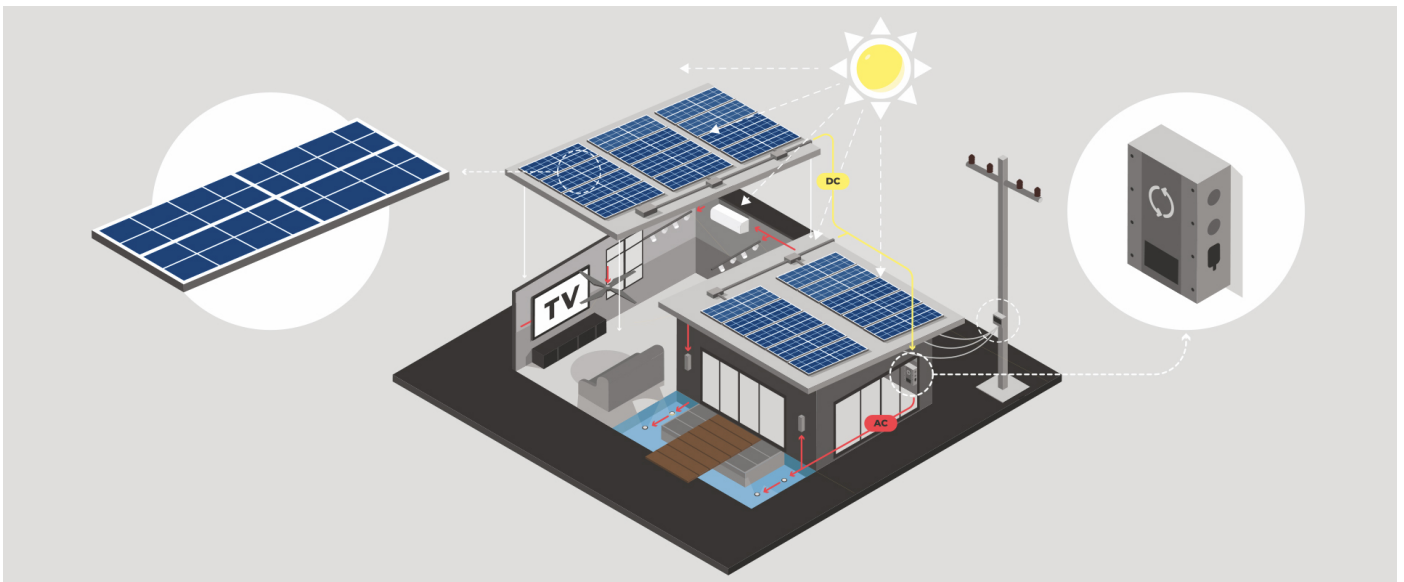

The efficiency of a solar PV system depends on the selection of the right inverter, or solar inverter. The inverter performs a key function in this system, changing the DC current generated by the solar PV panels into AC current used by household appliances.

The off-grid hybrid inverter combines the solar PV system, energy storage and the power grid. During the day, it charges the energy storage from the photovoltaic panels. The energy storage unit powers household appliances from the stored energy during the day, and when the batteries are discharged, it draws energy from the grid.


The inverter works in off-grid mode, using excess solar energy to power consumers and charge the battery. In the event of an emergency, current is drawn from the solar PV system to the energy storage and can safely and uninterruptedly ensure the continuous operation of our appliances.

WHY SHOULD YOU CHOOSE A HYBRID INVERTER ?



- Pure sinus,
- built-in Wi-Fi,
- clear and intuitive LCD display,
- USB On-the-Go support,
- maximum power point tracking (MPPT),
- Overload / over temperature / short circuit protection,
- detachable LCD control panel with multiple communication ports for BMS (RS485, CAN-BUS, RS232),
- configurable input voltage ranges for home appliances and PCs via LCD control panel,
- configurable AC/PV output utilization timer and prioritization,
- configurable AC/Solar charger priority mode via LCD control panel,
- configurable application-specific battery charging current via LCD control panel,
- grid or generator compatibility,
- automatic restart when AC power is restored,
- intelligent charger design for optimal battery performance,
- cold start function,
- built-in anti-dusk kit,
- optional 12V DC output,
- adequate cooling is provided by fans.

MAXIMIZE THE POSSIBILITIES WITH MPPT TECHNOLOGY

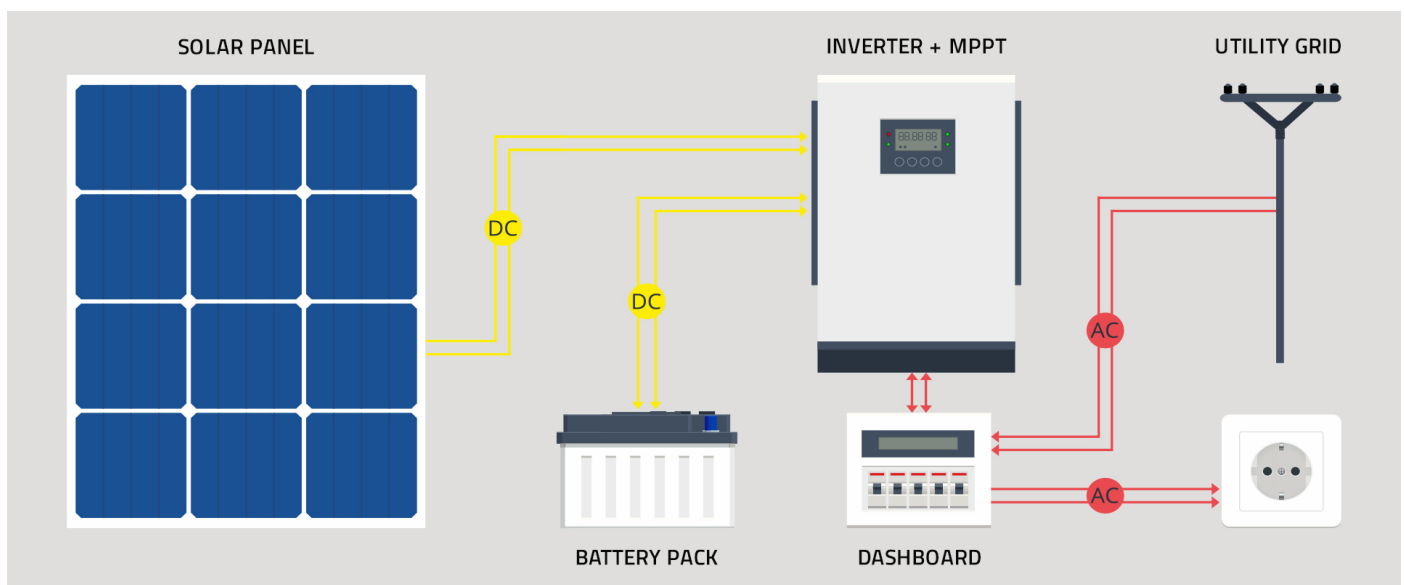

The battery charging inverter uses a state-of-the-art 120A MPPT charge controller to maximize the power drawn from the photovoltaic panels, using advanced maximum power point tracking technology.

Having this feature significantly affects the efficiency of the photovoltaic installation—they can maintain high power even in low sunlight conditions. In addition, the controller controls the battery operation and charging process and protects the battery from damage.

MULTIFUNCTION LCD DISPLAY

The product is equipped with a multifunctional, easy-to-use LCD display with control panel. Facilitates monitoring of the entire photovoltaic installation. Allows you to configure the input voltage range for home appliances and personal computers or change the priority settings of the AC/Solar charger. In addition, the display records data and informs about failures, reacting accordingly if any of the parameters exceed the norm. If a fault occurs, the inverter shuts down.

INCREASE INSTALLATION EFFICIENCY



Possible increase in system capacity to 48kW by connecting 6 units in parallel.

CONFIDENCE CONFIRMED BY A WARRANTY

The product comes with a 24-month warranty from the date of purchase.

TECHNICAL DATA

Producer	Qoltec
Type	Off-Grid
Phase	1
Parallel capability	6
Rated Power	8000VA/8000W
Input parameters	
Nominal Input voltage	230 VAC
Input Voltage Range	90 - 280 VAC
Working frequency	60/50 HZ
Output parameters	
Maximum power	16000VA
Efficiency	93 %
Transfer time	15 ms (PC) 20 ms (home appliances)
Waveform	Pure sine wave
Features of the battery	
Type of charging	MPPT
Battery voltage	48 VDC
Battery charging voltage	54 VDC
Battery overcharge protection	66 VDC
Built-in battery	No

Maximum battery charging current from PV	120A
Solar charger	
Maximum PV array open circuit power	8000 W (4000 x 2)
MPPT operating voltage range	90 ~ 450VDC
Maximum PV array open circuit voltage	500 VDC
Maximum solar charge current	120 A
Maximum charging current	120 A
Other parameters	
Screen	LCD
Connector diameter	M8 - 8 mm
Cooling system	3x fans
Interface	USB/RS232/RS485/WiFi/Dry-contact
Noise level	66 dB
Protection	Anti-short-circuit Surge protection Thermal Overload
Colour	Silver, black
Storage temperature	-15°C do +60°C
Working temperature	-10°C ~ +50°C
Package depth / length [mm]	710
Package height [mm]	250
Package width [mm]	575
Net weight [kg]	19.200
Gross weight [kg]	22.240
Certificate	CE
Warranty	24 month
EAN code	5901878538891