




K2 Dome 6 System

For almost all roof coverings on flat roofs. Due to the Mat S, installation can be significantly ballast-optimised. A secure anchoring with fixed connection can be carried out on roofs with more than 3° and low load reserves. With an elevation of 15° (exclusively with the S-dome variant), a better angle of incidence can be created.

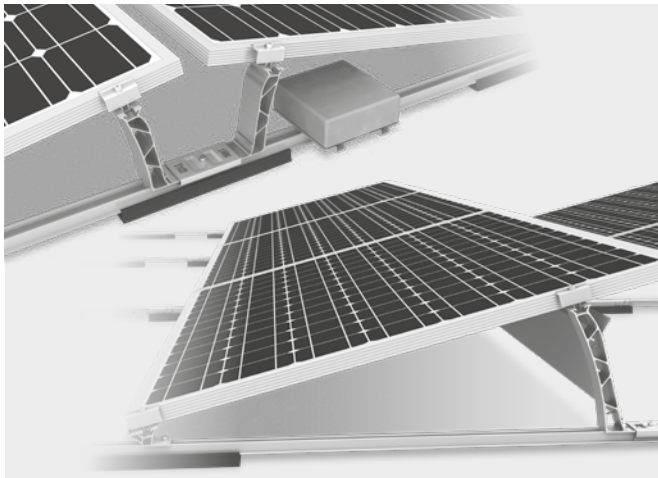

K2 Dome 6 Xpress

- Super-fast assembly in just a few steps
- Time-saving alignment of the rails with Dome Speed Spacer
- Snap-in function for peaks and tool-free rail connectors



K2 Dome 6 Classic

- For mounting standard size PV modules and flexible row spacing
- Mounting with many obstacles for full utilisation of the roof area



K2 Dome 6 Classic LS

- Suitable for higher wind/snow loads and for larger modules up to 2390 × 1170 mm.
- Mounting on the long side of the module



Further information,
all technical data and
components