




K2 Dome Zero System

For roof-parallel mounting with the usual Dome 6 components. A secure anchorage with fixed connection can be made for roofs with more than 3° and low load reserves.

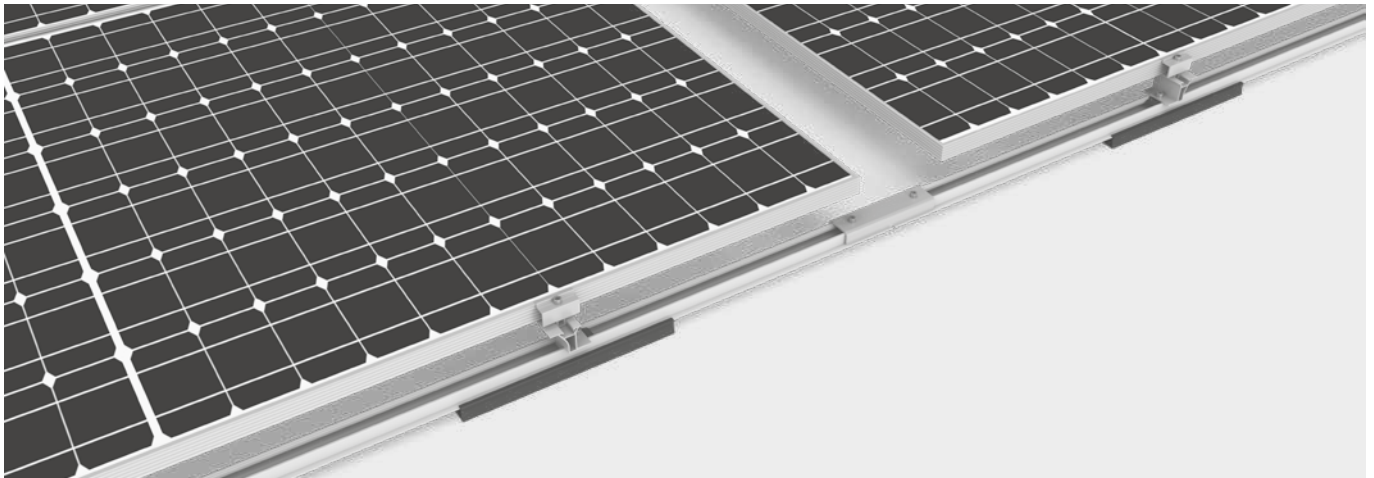

System-Highlights

Roof pitch up to 10°

- Dome FixPro S fixed connection enables use on roofs with a pitch of up to 10°.

Few components

- Few components due to proven K2 modular system
- For the elevation a 0° peak is used

Less ballast

- Due to the Mat S and the fixed connection, the necessary ballast remains low
- Enables use on roofs with low load reserves



Further information,
all technical data and
components