

GCL- NT12/66GDF



665-695W

**Bifacial Dual Glass
Monocrystalline Module**

695W

Maximum Power Output

22.4%

Maximum Module Efficiency

0~+5W

Power Output Guarantee

GCL-GEMINI

GCL Delivers Reliable Performance Over Time

- World-class manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard: ISO 9001, ISO 14001 and ISO 45001
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing test: IEC 61701, IEC 62716, DIN EN 60068-2-68)
- Long term reliability tests
- 2x100% EL inspection ensuring defect-free modules



Ideal choice for large scale ground installation



Non-destructive cutting, reduce potential micro crack risk




Additional safety, Fire class A certified



N type technology: The N-type module has better reliability and lower LID/LETID

Linear Performance Warranty

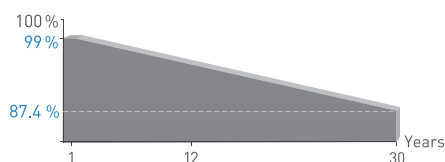

12 Year Product Warranty

30 Year Linear Power Warranty

0.40% Annual Degradation Over 30 years



Selected encapsulating material and stringent production process control ensure the product is highly PID resistant and snail trails free



Large size silicon wafer module can reduce the cost of PV support bracket, combining manifolds, cable, land and so on, thus thinning the LCOE

* Please refer to GCL standard warranty for details

Additional Insurance Backed by Swiss RE

* Please refer to GCL for details



Electrical Specification (STC*)

| | | | | | | | | |
|------------------------|---------|-------|-------|-------|-------|-------|-------|-------|
| Maximum Power | Pmax[W] | 665 | 670 | 675 | 680 | 685 | 690 | 695 |
| Maximum Power Voltage | Vmp[V] | 39.42 | 39.62 | 39.82 | 40.02 | 40.22 | 40.42 | 40.62 |
| Maximum Power Current | Imp[A] | 16.87 | 16.91 | 16.95 | 16.99 | 17.03 | 17.07 | 17.11 |
| Open Circuit Voltage | Voc[V] | 46.29 | 46.49 | 46.69 | 46.90 | 47.10 | 47.30 | 47.50 |
| Short Circuit Current | Isc[A] | 17.58 | 17.63 | 17.68 | 17.73 | 17.77 | 17.82 | 17.87 |
| Module Efficiency | (%) | 21.4 | 21.6 | 21.7 | 21.9 | 22.1 | 22.2 | 22.4 |
| Power Output Tolerance | [W] | 0~+5 | | | | | | |

* Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

Electrical Specification (NMOT*)

| | | | | | | | | |
|-----------------------|----------|--------|--------|--------|--------|--------|--------|--------|
| Maximum Power | Pmax [W] | 502.20 | 505.80 | 509.90 | 513.60 | 517.20 | 521.00 | 525.00 |
| Maximum Power Voltage | Vmp [V] | 36.74 | 36.92 | 37.11 | 37.30 | 37.48 | 37.67 | 37.85 |
| Maximum Power Current | Imp [A] | 13.67 | 13.70 | 13.74 | 13.77 | 13.80 | 13.83 | 13.87 |
| Open Circuit Voltage | Voc[V] | 43.61 | 43.80 | 43.99 | 44.18 | 44.36 | 44.55 | 44.74 |
| Short Circuit Current | Isc [A] | 14.17 | 14.21 | 14.25 | 14.29 | 14.33 | 14.37 | 14.41 |

* Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

Electrical characteristics with different power bin (reference to 10% Irradiance ratio on module rear)

| | | | | | | | | |
|-----------------------|----------|--------|--------|--------|--------|--------|--------|--------|
| Maximum Power | Pmax [W] | 718.22 | 723.57 | 728.94 | 734.33 | 739.74 | 745.17 | 750.61 |
| Maximum Power Voltage | Vmp [V] | 39.42 | 39.62 | 39.82 | 40.02 | 40.22 | 40.42 | 40.62 |
| Maximum Power Current | Imp [A] | 18.22 | 18.26 | 18.31 | 18.35 | 18.39 | 18.44 | 18.48 |
| Open Circuit Voltage | Voc[V] | 46.29 | 46.49 | 46.69 | 46.90 | 47.10 | 47.30 | 47.50 |
| Short Circuit Current | Isc [A] | 18.99 | 19.04 | 19.09 | 19.15 | 19.19 | 19.25 | 19.30 |

Irradiance ratio (rear/front) 10%

Mechanical Data

| | |
|---------------------------------|---|
| Number of Cells | 132 Cells (6×22) |
| Dimensions of Module L*W*H (mm) | 2384×1303×35mm (93.86×51.30×1.38 inches) |
| Weight (kg) | 38.7kg |
| Front Side Glass | 2.0mm (0.08 inches), Anti-Reflection Coating |
| Back Side Glass | 2.0mm (0.08 inches), Heat Strengthened Glass |
| Frame | Silver, anodized aluminium alloy |
| J-Box | IP68 Rated |
| Cable | 4.0mm² (0.006 inches²), Portrait: 280/280mm (11.02inches) |
| Number of diodes | 3 |
| Wind/ Snow Load | 2400Pa/ 5400Pa* |
| Connector | MC Compatible |
| Bifaciality | 80±5% |

* For more details please check the installation manual of GCLSI

Temperature Ratings

| | |
|--|------------|
| Nominal Module Operating Temperature(NMOT) | 45±2°C |
| Temperature Coefficient of Isc | +0.045%/°C |
| Temperature Coefficient of Voc | -0.26%/°C |
| Temperature Coefficient of Pmax | -0.29%/°C |

Maximum Ratings

| | |
|-------------------------|-----------|
| Operational Temperature | -40~+85°C |
| Maximum System Voltage | 1500V DC |
| Max Series Fuse Rating | 35A |


Optional

Connector: Original MC4


Packaging Configuration

| | |
|--------------------------|------------|
| Module per box | 31 pieces |
| Module per 40' container | 558 pieces |


Module Dimension

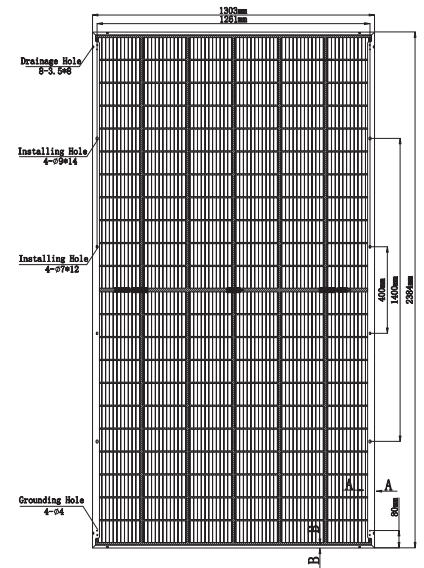


Back View

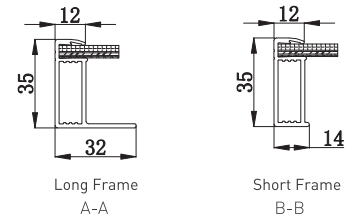

I-V Curve at Different Temperature (695W)

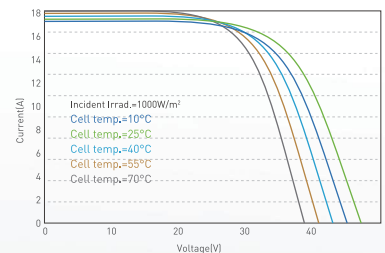

I-P/P-V Curve at Different Irradiation (695W)

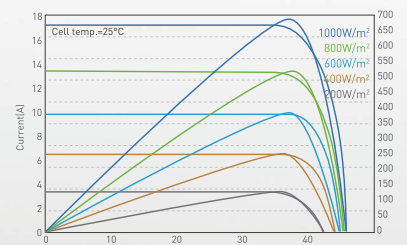

CAUTION: READ INSTALLATION MANUAL BEFORE USING THE PRODUCT

Contact Us for More Information

website: www.gclsi.com email: gclsisales@gclsi.com

