

ET-M772BHGL 530W-550W

PERC BIFACIAL MODULE



High Power Generation
Bifacial technology enables additional energy harvesting from rear side (up to 25%)



High Efficiency
Higher module conversion efficiency benefit from half-cut cell structure (low resistance characteristic, less mismatch loss).



Severe Weather Resilience
Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




PID Resistance
Excellent Anti-PID performance guarantee limited power degradation for mass production.



Durability Against Extreme Environmental Conditions
High salt mist, ammonia resistance and excellent fire resistance.

WARRANTY

■ Elite Solar Mono Module Linear Performance Warranty

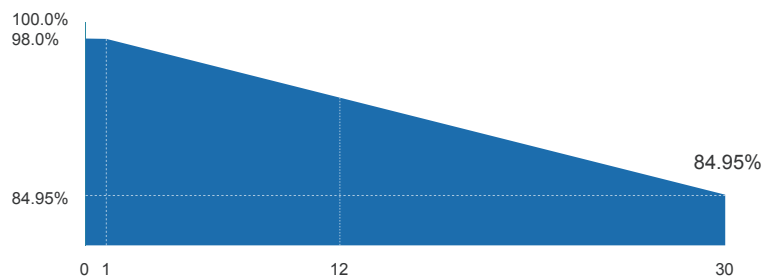

1st year $\leq 2\%$, 2nd~30th years $\leq 0.45\%$ / year

12
YEARS

Guarantee on product material and workmanship

30
YEARS

Linear power output warranty

IEC61215
IEC61730
UL61215
UL61730



ELECTRICAL SPECIFICATIONS

Module Type	ET-M772BH530GL		ET-M772BH535GL		ET-M772BH540GL		ET-M772BH545GL		ET-M772BH550GL	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power -P _{mp} (W)	530	398	535	401	540	405	545	409	550	413
Open Circuit Voltage -V _{oc} (V)	49.30	46.20	49.45	46.24	49.60	46.28	49.75	46.32	49.90	46.36
Short Circuit Current -I _{sc} (A)	13.72	11.29	13.79	11.38	13.86	11.46	13.93	11.54	14.00	11.62
Maximum Power Voltage -V _{mp} (V)	41.31	37.18	41.47	37.24	41.64	37.30	41.80	37.36	41.96	37.42
Maximum Power Current -I _{mp} (A)	12.83	10.69	12.91	10.77	12.97	10.86	13.04	10.94	13.11	11.03
Module Efficiency STC-η _m (%)	20.5%		20.7%		20.9%		21.1%		21.3%	
Power Tolerance (W)	0~+3%									
Pmax Temperature Coefficient	-0.360%/°C									
Voc Temperature Coefficient	-0.292%/°C									
Isc Temperature Coefficient	+0.044%/°C									
Fire Performance	Type 29(UL)									


REAR SIDE POWER GAIN (ET-M772BH535GL)

Power Gain	10%	15%	20%	25%
Maximum Power -P _{mp} (W)	589	615	642	669
Open Circuit Voltage -V _{oc} (V)	49.06	49.06	49.06	49.06
Short Circuit Current -I _{sc} (A)	15.13	15.81	16.50	17.19
Maximum Power Voltage -V _{mp} (V)	42.67	42.67	42.67	42.67
Maximum Power Current -I _{mp} (A)	13.79	14.42	15.05	15.68

MECHANICAL SPECIFICATIONS

External Dimension	2278 x 1134 x 35mm
Weight	32kg
Solar Cells	PERC Mono crystalline 182 x 91 mm (144pcs)
Front Glass/Black Glass	2.0mm/2.0mm
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Cable Length (Including Connector)	4.0 mm ² (12AWG), Portrait:200mm(+)/400mm(-);Or customized
Connector	MC4 Compatible
Power Bifaciality*	70%±10%

CURVE

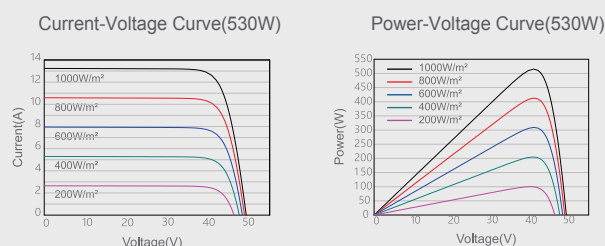

APPLICATION CONDITIONS


Maximum System Voltage	1500VDC
Maximum Series Fuse Rating	30A
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature	45±2 °C
Mechanical Load	5400Pa/2400Pa

PACKING MANNER

Container	40'HQ
Pieces per Pallet	31
Size of packing (mm)	2300*1130*1264
Weight of packing (kg)	1034
Pieces per Container	620/558(NA)

PHYSICAL CHARACTERISTICS

Unit:mm

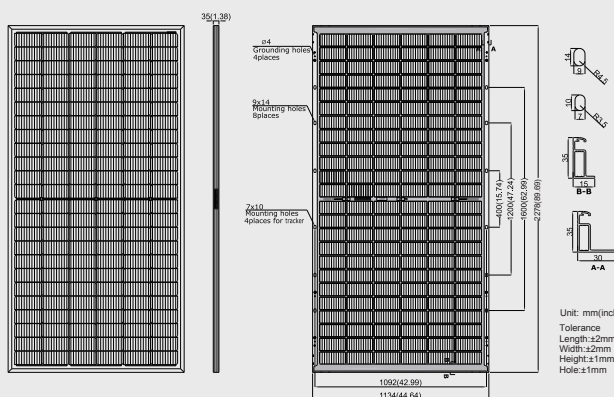

* The above drawing is a graphical representation of the product.
For engineering quality drawings please contact Elite Solar.

Note: The specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum. Please contact info@elite-solar.com for technical support. The actual transactions will be subject to the contracts. This parameter is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.