



Temperature Coefficients

Current Temperature Coefficient	TKcurrent: +0.046%/°C
Voltage Temperature Coefficient	TKvoltage: -0.26%/°C
Power Temperature Coefficient	TKpower: -0.30%/°C

IV Curve >

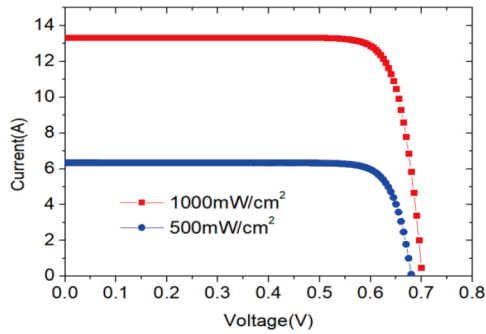

Spectral Response (SR) >

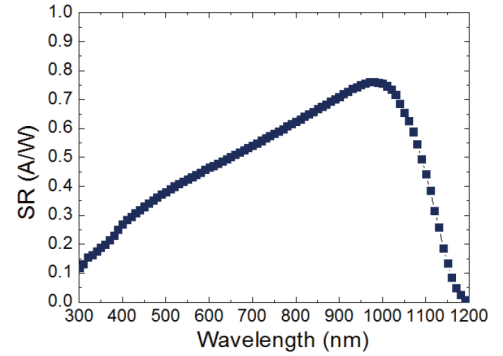

Electric Performance

Eff(%)	Pmpp(W)	Umpp(V)	Impp(A)	Uoc(V)	Isc(A)	FF(%)
25.3	8.3525	0.6325	13.2055	0.7251	13.8775	83.01
25.2	8.3198	0.6282	13.2448	0.7240	13.8656	82.88
25.1	8.2868	0.6273	13.2109	0.7228	13.8561	82.75
25.0	8.2537	0.6275	13.1535	0.7228	13.8418	82.50
24.9	8.2208	0.6255	13.1417	0.7203	13.8367	82.48
24.8	8.1878	0.6208	13.1898	0.7158	13.8301	82.71
24.7	8.1547	0.6195	13.1631	0.7149	13.8271	82.49
24.6	8.1214	0.6169	13.1639	0.7117	13.8140	82.60
24.5	8.0890	0.6168	13.1149	0.7171	13.8230	81.60
24.4	8.0561	0.6134	13.1336	0.7166	13.8307	81.28
24.3	8.0227	0.6146	13.0546	0.7158	13.7915	81.27

*Under standard test condition: Irradiance=1000W/ m², Ambient Temperature=25°C, AM=1.5 Illustration:23.1% → Actual Range: 24.3%~24.4% Specifications and data are for reference only. If there is any change, notice will be given separately

Quality Control

- ⊙ Proper inspection through incoming production, outgoing and packaging
- ⊙ 100% checked for reverse current and visual appearance



SUZHOU SUNERGY TECHNOLOGY CO.,LTD.

Add: No.199 Shishan Road Suzhou New District Suzhou City, Jiangsu Province, China,

TEL: +86 512-66673447 sales@sunergypower.cn