

## *PiE AIR superLIGHT HC 200+* 200 Watt 18 V BLK/TRNS



### **SUPER LIGHT**

GLASS-FREE AND FRAMELESS, NEVERTHELESS ROBUST SOLAR MODULE DUE TO ETFE WITH A NET WEIGHT OF 3.80 KG



### **EASY TO FIT**

16 LONG HOLES FOR EASY AND UNIVERSAL USAGE



### **HIGH PERFORMANCE & SHADOW RESISTANCE**

USAGE OF SPECIAL HALF-CUT MONOCRYSTALLINE SOLAR CELLS TO ABSORB THE MAXIMUM OF SUNLIGHT AND CONVERT INTO ENERGY




### **WARRANTY**

6 YEARS PRODUCT WARRANTY

25 YEARS LINEAR PERFORMANCE WARRANTY (81% POWER ASSURANCE)

Type	PiE AIR superLIGHT Half-Cut 200+
Maximum Power (Pmax)	200 W+
Maximum Power Voltage (Vmp)	18.00 V
Maximum Power Current (Imp)	11.10 A
Open Circuit Voltage (Voc)	22 V±3 %*
Short Circuit Current (Isc)	11.7 A±3 %*
Power temperature coefficient	- 0.045%/°C
Voltage temperature coefficient	- 0.33%/°C
Current temperature coefficient	- 0.05%/°C
Power Selection	1~5 W
Maximum System Voltage	IEC 1500 V
Module Efficiency (%)	> 19,4 %
Certification	CE – RoHS IEC 61730 - IEC61215 - IEC61000



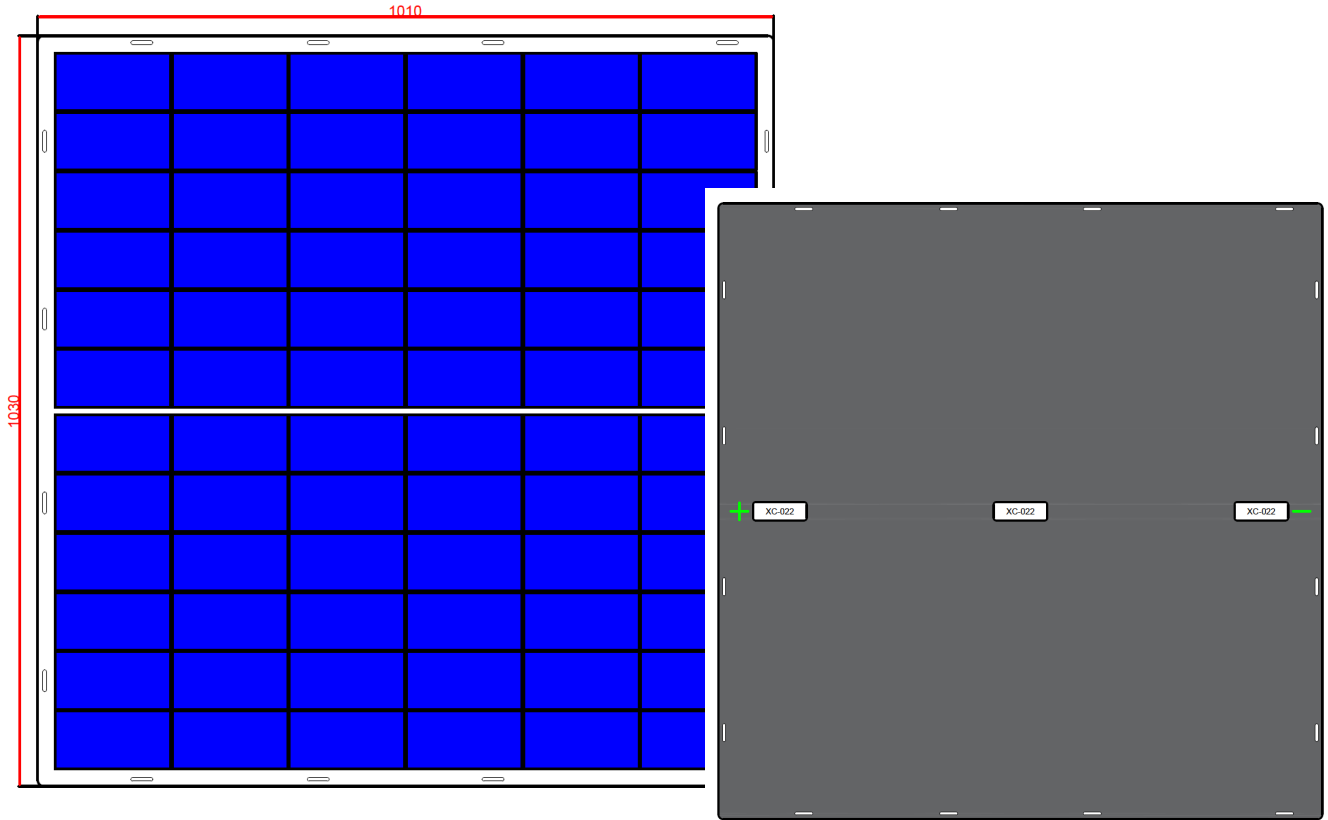

**SIZE:** 1010 x 1030 x 3.5

