




CERTIFIED
UL1973
IEC62619,CE
UN38.3,MSDS

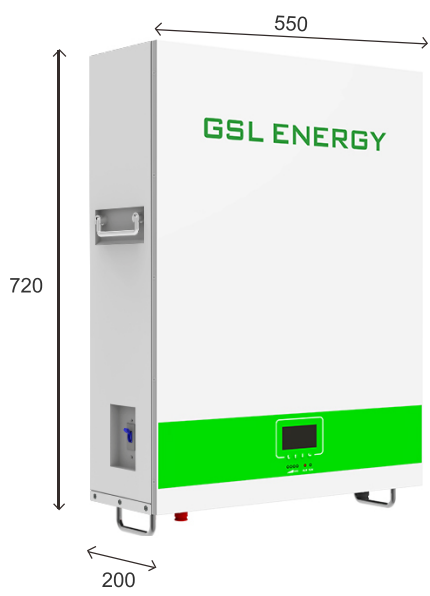

As the leading vertically integrated manufacturer of lithium iron phosphate battery systems, GSL ENERGY has provided various battery solutions for nearly all kinds of ESS applications. Thanks to our self-developed core technology in cells/BMS/system design, GSL ENERGY has delivered more than 138+ countries serving 100,000+ users.

www.gsl-energy.com

- ✔ **Long life and safety**
Vertical industry integration ensures more than 6500 cycles with 80% DoD.
Safe Lithium iron phosphate battery cell.
- ✔ **Intelligent**
Each battery with independent BMS system manages power output smartly and effectively.
- ✔ **Modularization**
Modular design gives the end customers the power of choice of capacity Deliver up to 163KW with single max module (10.24KWh) at 16pcs parallel connection.
- ✔ **Easy to install and use**
Just plug and play to minimize the installation time and cost.
Compact and fashionable design fits in your sweet home environment.
- ✔ **Compatibility**
Compatible with most of the available Hybrid inverters.
- ✔ **Safety Cert**
UL1973, IEC62619, CE, UN38.3, MSDS.

Battery Specifications

Model No	GSL051100A-B-GBP2	GSL051200A-B-GBP2
Nominal Parameters		
Voltage	51.2V	51.2V
Capacity	100Ah	200Ah
Energy	5.12KwH	10.24KwH
Dimensions (L x W x H)	720 x550 x200mm	720 x550 x200mm
Weight	60.5kg	102.5kg
Basic Parameters		
Life time(25°C)	15 years	
Life cycles(80% DOD, 25°C)	6500Cycles	
Storage time / temperature	5 months @ 25°C; 3 months @ 35°C; 1 month @ 45°C	
Operation temperature	-20°C to 60°C @60+/-25% Relative Humidity	
Storage temperature	0°C to 45°C @60+/-25% Relative Humidity	
Lithium Battery Standard	UL1642,IEC62619,UN38.3,ROHS,CE-EMC	
Enclosure protection rating	IP21	
Electrical Parameters		
Operation voltage	46-56 Vdc	46-56 Vdc
Max.charging voltage	56 Vdc	56 Vdc
Max.charging and discharging current	100A	150A
Max Power	5120W	7680W

