


## Metal Roof L-Feet Serise

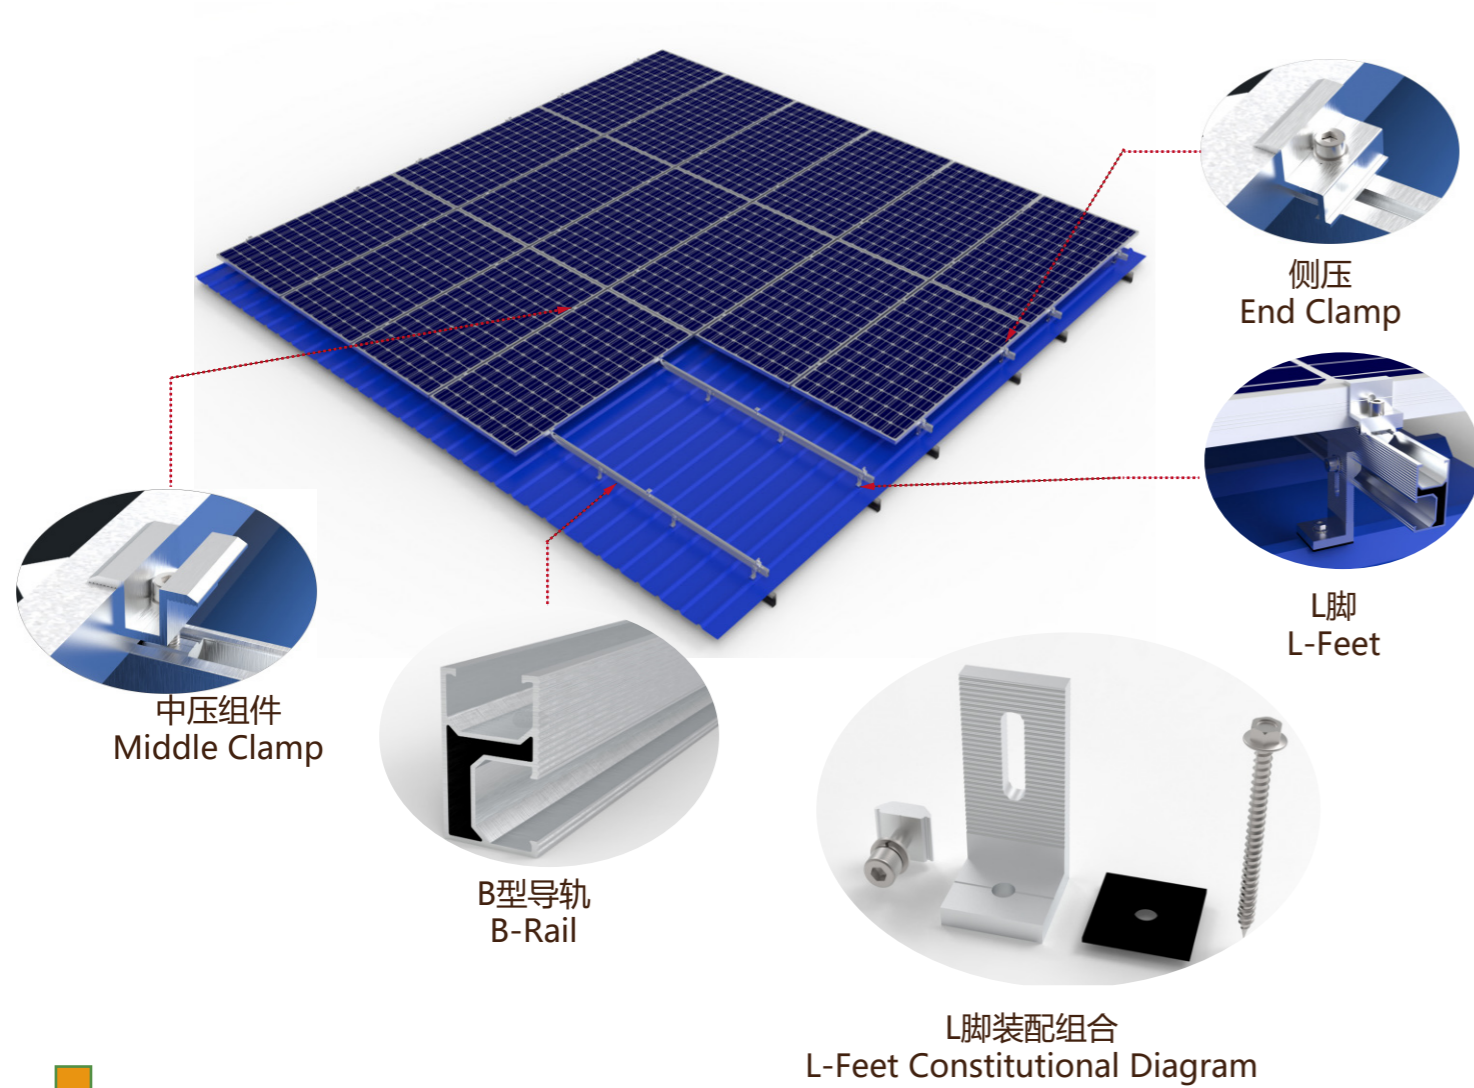

### PRODUCT INTRODUCTION


#### Application scenario: Metal Roof

Metal Roof L-Feet Serise, Material aluminum AL6005-t5, through professional design to make the support parts and accessories perfectly connected, easy to install, safe and reliable.

- Technical Details:
  - 1.Installation site; Metal Roof.
  - 2.Module Orientation: : Module Vertical Or Landscape
  - 3.L-Feet Pull-Out Eesistance:  $\geq 1.2\text{KN}$
  - 4.Wind load:  $\leq 60\text{m/s}$
  - 5.Snow load:  $\leq 1.6\text{KN}/\text{m}^2$
  - 6.Material: Aluminum AL6005-T5 (AA10~AA20)
  - 7.Surface Treatment: Natural anodized、Black anodized、And other color customizations
  - 8.Quality Warranty 12 years, Service life of 25 years.

Applicable standard: Japan JIS C8955:2017、China GB 50009 2001、Europe EN 1991-1-4:2005、India: IS:875、Australia AS NZ 1170、USA ASCE7 wind load、Malaysia MS 1553:2002 And other national standards。

## Metal Roof L-Feet Serise

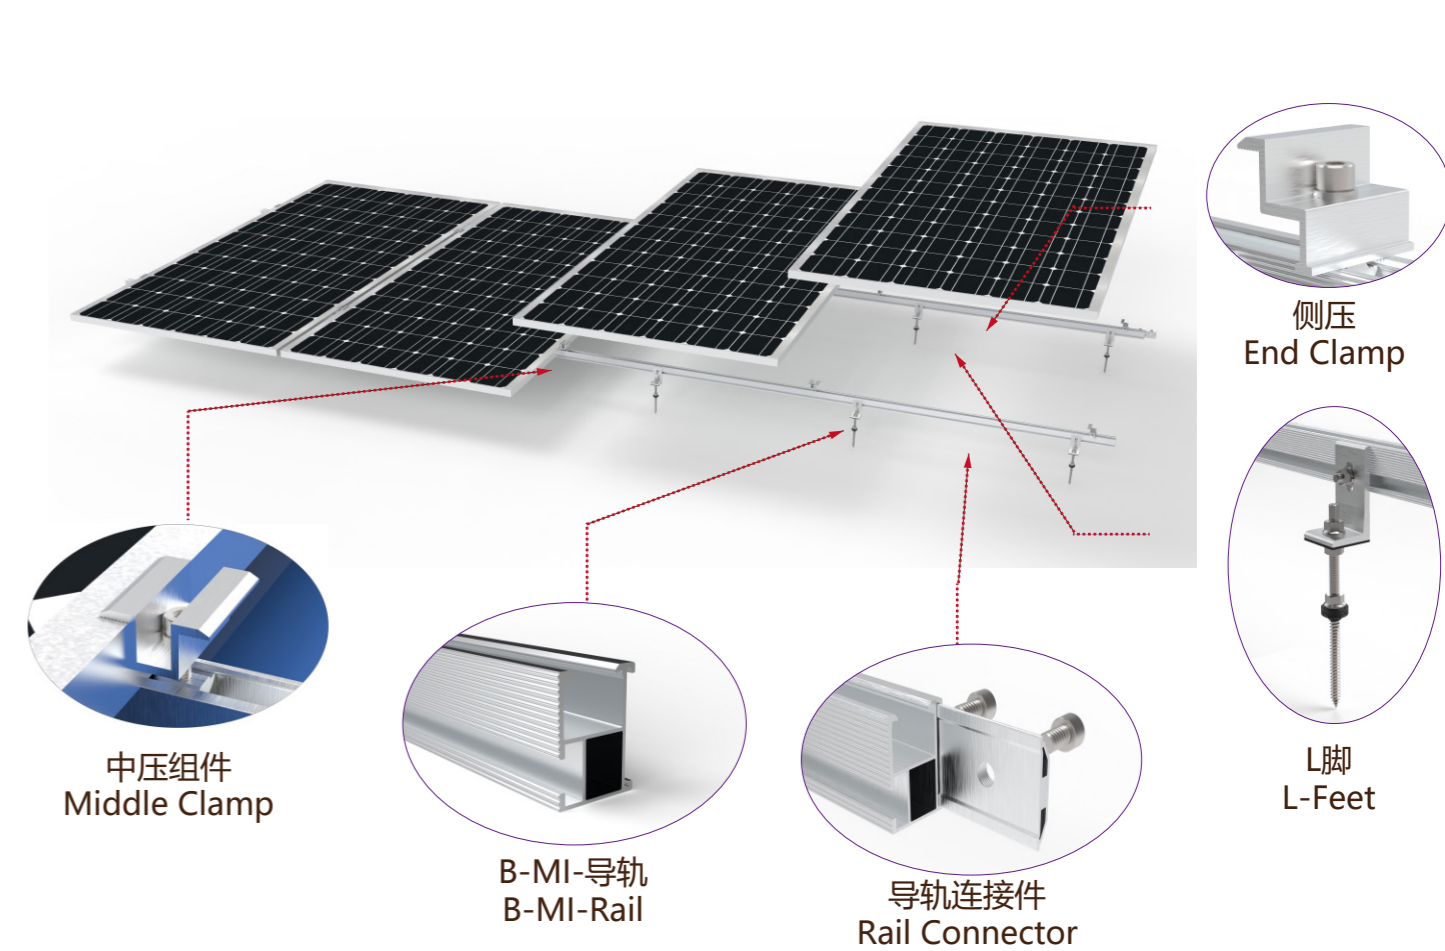

### PRODUCT INTRODUCTION

#### Application scenario: Metal Roof

Metal Roof L-Feet Serise, Material aluminum AL6005-t5, through professional design to make the support parts and accessories perfectly connected, easy to install, safe and reliable.

- Technical Details:
  - 1.Installation site; Metal Roof.
  - 2.Module Orientation: : Module Vertical Or Landscape
  - 3.L-Feet Pull-Out Eesistance:  $\geq 1.2\text{KN}$
  - 4.Wind load:  $\leq 60\text{m/s}$
  - 5.Snow load:  $\leq 1.6\text{KN}/\text{m}^2$
  - 6.Material: Aluminum AL6005-T5 (AA10~AA20)
  - 7.Surface Treatment: Natural anodized、Black anodized、And other color customizations
  - 8.Quality Warranty 12 years, Service life of 25 years.

Applicable standard: Japan JIS C8955:2017、China GB 50009 2001、Europe EN 1991-1-4:2005、India: IS:875、Australia AS NZ 1170、USA ASCE7 wind load、Malaysia MS 1553:2002 And other national standards。