




M/ET-PD-EN2024V2  
info@elite-solar.com

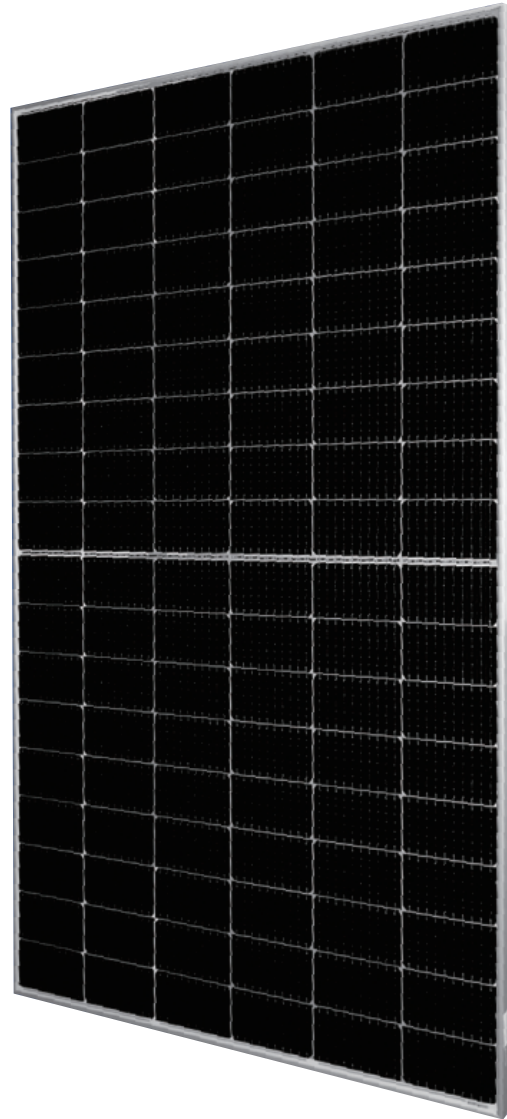

**ET-M754BHTW/TB**  
**395W-415W**

PERC BIFACIAL MODULE



**Increased Power Generation**  
Bifacial technology enables additional energy harvesting from rear side (up to 25%).



**Increased Efficiency**  
Increased module conversion efficiency from half-cut cell structure (low resistance characteristic, decreased mismatch loss).



**Severe Weather Resilience**  
Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




**PID Resistance**  
Excellent Anti-PID performance guarantees limited power degradation for mass production.



**Durability Against Extreme Environmental Conditions**  
Exceptional durability against salt mist and ammonia exposure.

## WARRANTY

■ Elite Solar Mono Module  
Linear Performance Warranty

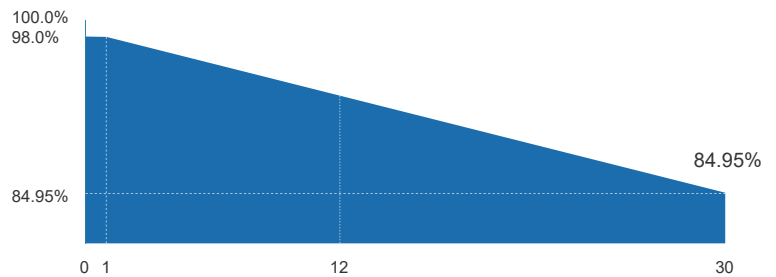

1st year  $\leq$  2%, 2nd~30th years  $\leq$  0.45% / year



Guarantee on product material and workmanship



Linear power output warranty

IEC61215  
IEC61730  
UL61215  
UL61730



## ELECTRICAL SPECIFICATIONS

Module Type	ET-M754BH395TW/TB		ET-M754BH400TW/TB		ET-M754BH405TW/TB		ET-M754BH410TW/TB		ET-M754BH415TW/TB	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power -P <sub>mp</sub> (W)	395	298	400	302	405	306	410	310	415	314
Open Circuit Voltage -V <sub>oc</sub> (V)	36.98	34.75	37.07	34.88	37.23	35.02	37.32	35.23	37.45	35.37
Short Circuit Current -I <sub>sc</sub> (A)	13.70	10.96	13.79	11.03	13.87	11.10	13.95	11.16	14.02	11.22
Maximum Power Voltage -V <sub>mp</sub> (V)	30.84	29.08	31.01	29.26	31.21	29.47	31.45	29.72	31.61	29.89
Maximum Power Current -I <sub>mp</sub> (A)	12.81	10.25	12.90	10.32	12.98	10.38	13.04	10.43	13.13	10.50
Module Efficiency STC-η <sub>m</sub> (%)	20.2%		20.5%		20.7%		21.0%		21.3%	
Power Tolerance (W)	0+3%									
Pmax Temperature Coefficient	-0.339%/°C									
Voc Temperature Coefficient	-0.251%/°C									
Isc Temperature Coefficient	+0.046%/°C									
Fire Performance	Class C(IEC)/Type 1(UL)									

## REAR SIDE POWER GAIN (ET-M754BH405TW)


Power Gain	10%	15%	20%	25%
Maximum Power -P <sub>mp</sub> (W)	446	466	486	506
Open Circuit Voltage -V <sub>oc</sub> (V)	37.23	37.23	37.23	37.23
Short Circuit Current -I <sub>sc</sub> (A)	15.08	15.78	16.46	17.15
Maximum Power Voltage -V <sub>mp</sub> (V)	31.21	31.21	31.21	31.21
Maximum Power Current -I <sub>mp</sub> (A)	14.27	14.92	15.57	16.22

## MECHANICAL SPECIFICATIONS


External Dimension	1722 x 1134 x 30mm
Weight	21.5kg
Solar Cells	PERC Mono crystalline 182 x 91mm (108pcs)
Front Glass	3.2mm AR coating tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Cable Length (Including Connector)	4.0 mm²(12AWG), Portrait:200mm(+)/400mm(-);Or customized
Connector	MC4 Compatible
Power Bifaciality*	70%±10%

## CURVE

Current-Voltage Curve (405W)



Power-Voltage Curve (405W)



## APPLICATION CONDITIONS


Maximum System Voltage	1500VDC
Maximum Series Fuse Rating	30A
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature	45±2 °C
Mechanical Load	5400Pa/2400Pa

## PACKING MANNER

Container	40'HQ
Pieces per Pallet	36
Size of packing (mm)	1760*1130*1264
Weight of packing (kg)	813
Pieces per Container	936/838(NA)

## PHYSICAL CHARACTERISTICS

Unit:mm

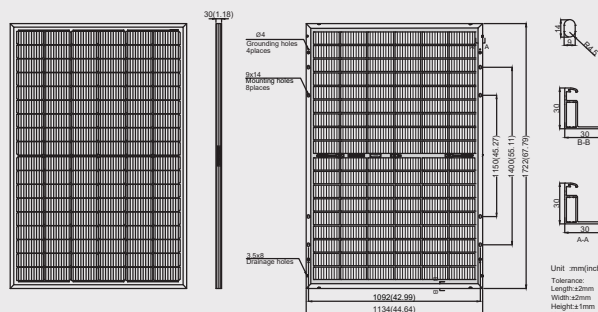

\* The above drawing is a graphical representation of the product.  
For engineering quality drawings please contact Elite Solar.

**Note:** The specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m<sup>2</sup> solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m<sup>2</sup>, 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum. Please contact [info@elite-solar.com](mailto:info@elite-solar.com) for technical support. The actual transactions will be subject to the contracts. This parameter is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.