


AS-7M144-HC 540W~560W Black

MONOCRYSTALLINE PERC MODULE

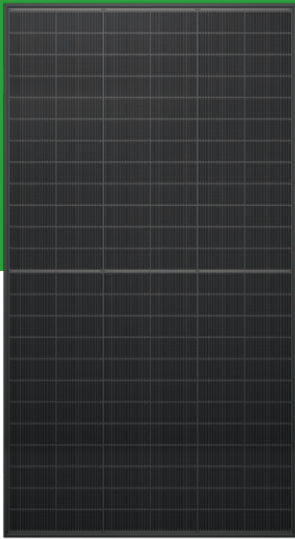

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 21.63% by using innovative N-type TOPCon cell technology.
- Extremely low LID (light induced degradation) and low annual power degradation ensure higher energy yield during the module's lifetime.
- Low temperature coefficient and excellent performance under high temperature and low light conditions.
- Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- Potential induced degradation (PID) resistance.

CERTIFICATIONS




- IEC 61215, IEC 61730, CE
- ISO 9001:2015: Quality management system
- ISO 14001:2015: Environmental management system
- ISO 45001:2018: Occupational health and safety management system

SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty

**Passionately
committed to
delivering innovative
energy solution**

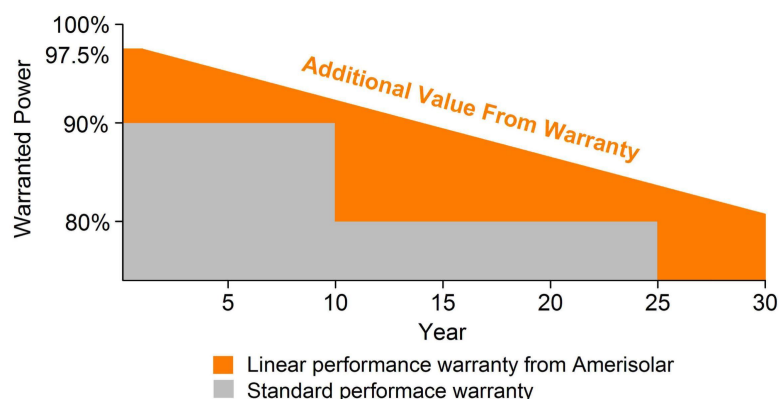

ELECTRICAL CHARACTERISTICS AT STC

Maximum Power (P_{max})	540W	545W	550W	555W	560W
Open Circuit Voltage (V_{OC})	49.6V	49.8V	50.0V	50.2V	50.4V
Short Circuit Current (I_{SC})	13.86A	13.90A	13.94A	13.98A	14.02A
Voltage at Maximum Power (V_{mp})	41.4V	41.6V	41.8V	42.0V	42.2V
Current at Maximum Power (I_{mp})	13.05A	13.11A	13.16A	13.22A	13.28A
Module Efficiency (%)	22.87	21.06	21.25	21.44	21.63
Operating Temperature	-40°C to +85°C				
Maximum System Voltage	1000/1500V(IEC)				
Fire Resistance Rating	Class C				
Maximum Series Fuse Rating	25A				

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5; Tolerance of Pmax: ±3%; Measurement Tolerance: ±3%

ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power (P_{max})	403W	407W	411W	415W	419W
Open Circuit Voltage (V_{OC})	45.5V	45.7V	45.9V	46.1V	46.3V
Short Circuit Current (I_{SC})	11.19A	11.22A	11.25A	11.28A	11.31A
Voltage at Maximum Power (V_{mp})	37.5V	37.7V	37.9V	38.1V	38.3V
Current at Maximum Power (I_{mp})	10.64A	10.69A	10.74A	10.79A	10.84A

NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind Speed 1 m/s

MECHANICAL CHARACTERISTICS

Cell type	Monocrystallin 182*91mm
Number of cells	144 (6x24)
Module dimensions	2278x1134x30mm
Weight	27.0kg
Front cover	3.2mm tempered glass with AR coating
Frame	Anodized aluminum alloy
Junction box	IP68, 3 diodes
Cable	4mm ² , Length:300mm
Connector	MC4 or MC4 compatible


TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	43°C±2°C
Temperature Coefficients of P_{max}	-0.30%/°C
Temperature Coefficients of V_{OC}	-0.25%/°C
Temperature Coefficients of I_{SC}	0.045%/°C


PACKAGING

Standard packaging	36pcs/pallet
Module quantity per 20' container	180pcs
Module quantity per 40' container	720pcs (HQ)


ENGINEERING DRAWINGS

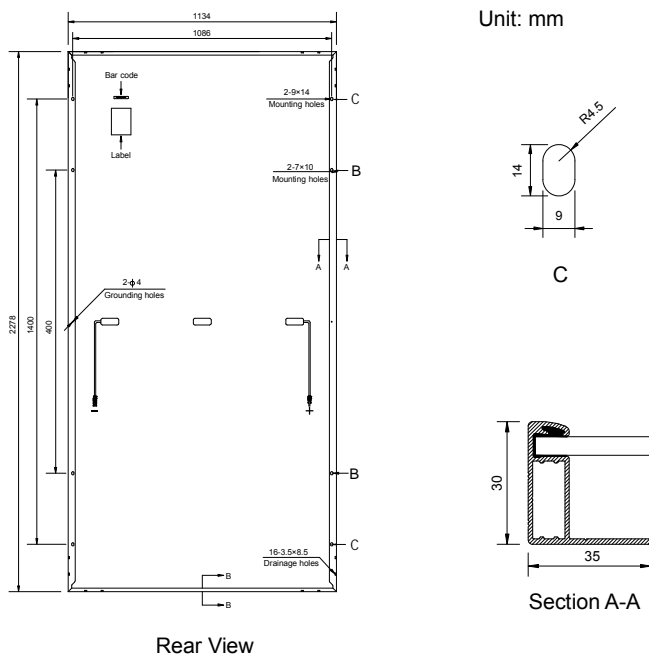

IV CURVES

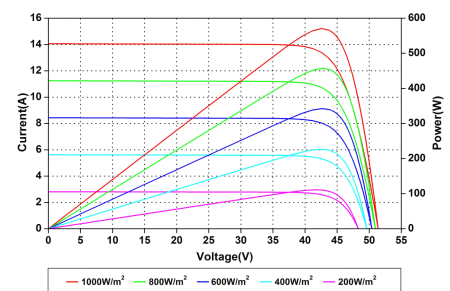

Current-Voltage and Power-Voltage Curves at Different Irradiances

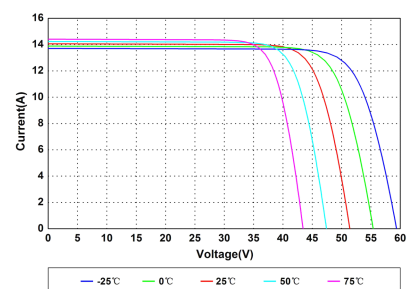

Current-Voltage Curves at Different Temperatures

Specifications in this datasheet are subject to change without prior notice.