

# ASTORIOS

per aspera ad astra



## HIGH EFFICIENCY BIFACIAL DOUBLE GLASS PHOTOVOLTAIC MODULE

ASTR 120HCND/12 Series 620-630 Wp

TOPCON N-TYPE HALF CUT CELLS

**630 Wp**

MAXIMUM POWER OUTPUT

**22.4%**

MAXIMUM MODULE EFFICIENCY



### NEGLIGIBLE LID IMPACT

TOPCon cells exhibit an almost zero susceptibility to Light Induced Degradation, ensuring sustained high efficiency over time despite exposure to sunlight



### HOT SPOTS RISK REDUCTION

Sophisticated electrical design, cells sorting, cutting and soldering technology leads to low hot spot risk and temperature control



### HIGH EFFICIENCY

N-type cells technology provides the highest efficiency modern multi busbar configuration at affordable cost



### MULTI BUSBAR TECHNOLOGY

Better light absorption and current collection for better power output



### MINIMIZING THE SHADING IMPACT

Better partial-shade tolerance due to separated half panel string wiring



### PID RESISTANT

Selected encapsulants, precision in manufacturing quality control makes modules highly PID resistant and snail trails free



### SAND, AMMONIA AND SALT MIST RESISTANCE


Sand blowing, ammonia and salt mist resistance tests have been passed by international standards to ensure operation in harsh conditions



### SUPERIOR SAFETY AND RELIABILITY

Tested to avoid microcracks and welding cracks, can withstand high pressure loads, passed multi-step quality control

## PERFORMANCE



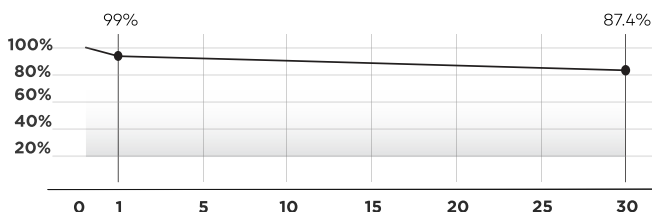


**30 YEARS**

Performance Guarantee

**20 YEARS**

Product Warranty

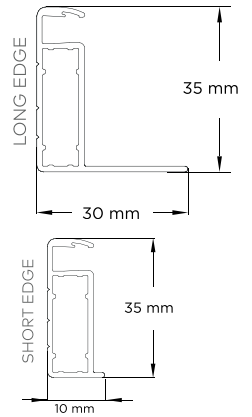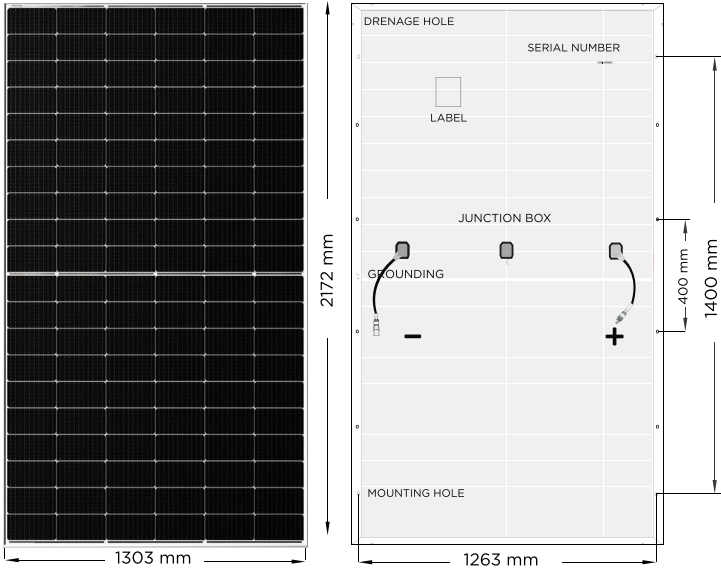

FRAME PROFILE

## MATERIAL CHARACTERISTICS

Dimensions	2172 x 1303 x 35 mm
Weight	35.3kg
Number of cells	120 pcs (6x20)
Glass front/rear	2mm, High transparency, AR coated
Cell layout	Bifacial, Half Cut N-Type 18BB (210 mm)
Frame	Silver color, anodized aluminum alloy
Junction box	IP68 Rated, 3 bypass diodes
Connector type	Staubli MC4-Evo 2 / MC4 (Original)
Cable	4 mm <sup>2</sup> , 300 mm

## TEMPERATURE PARAMETERS

Temperature Coefficient of Pmax	-0.30 % / °C
Temperature Coefficient of Voc	-0.25 % / °C
Temperature Coefficient of Isc	+0.046 % / °C
Operating Temperature	- 40°C to + 85°C
Normal Operating Cell Temperature (NOCT)	44±2°C

## MAXIMUM RATINGS

Max. System Voltage	1500V DC - (H)
Max. Series Fuse Rating	35A
Uplift load (wind)	2400 Pa*
Downforce (snow)	5400 Pa*

\*For more information please refer to Instruction Manual

## PACKAGING INFORMATION

One pallet quantity	31 pcs
40 ft HC/HQ container	558 pcs



MODULE TYPE 120HCND/12	620 Wp		625 Wp		630 Wp	
	STC	NMOT	STC	NMOT	STC	NMOT
<b>ELECTRICAL CHARACTERISTICS</b>						
Maximum power (Pmax/Wp)	620	469	625	473	630	476
Open circuit voltage (Voc / V)	42.90	40.60	43.10	40.80	43.30	41.00
Short circuit current (Isc / A)	18.31	14.77	18.36	14.81	18.41	14.85
Maximum power voltage (Vmp / V)	35.7	33.80	35.90	33.90	36.10	34.30
Maximum power current (Imp / A)	17.37	13.89	17.41	13.93	17.46	13.96
Module efficiency at STC (ηm / %)	22.00		22.20		22.40	
Power tolerance (Pmax)			0-+3%			

NMOT: Irradiance 800 W/m<sup>2</sup>, ambient temperature 20°C and wind speed 1 m/s

STC: Irradiance of 1000 W/m<sup>2</sup> with spectrum AM 1.5 and a module temperature of 25°C

## CERTIFICATES

IEC62716 (Ammonia)  
IEC60068-2-68 (Sand)  
IEC61215 / 61730 / 61701

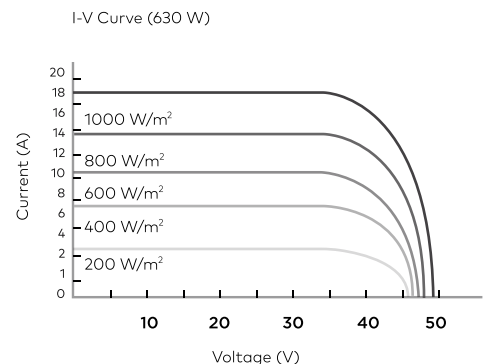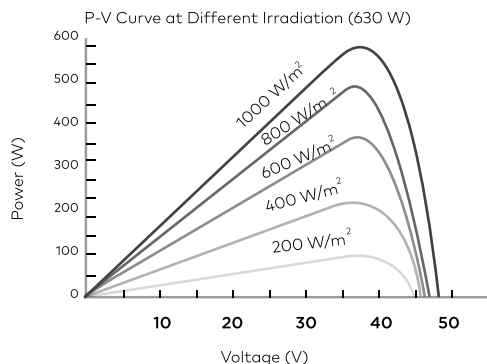

ASTORIOS Holding Inc.  
16192 Coastal Highway, Lewes,  
Delaware 19958, USA  
info@astorios.com