




**MONO
Half Cut
HS60-16X**

**25
Years**

GUARANTEED

High Efficiency PERC Half Cut Mono Cells

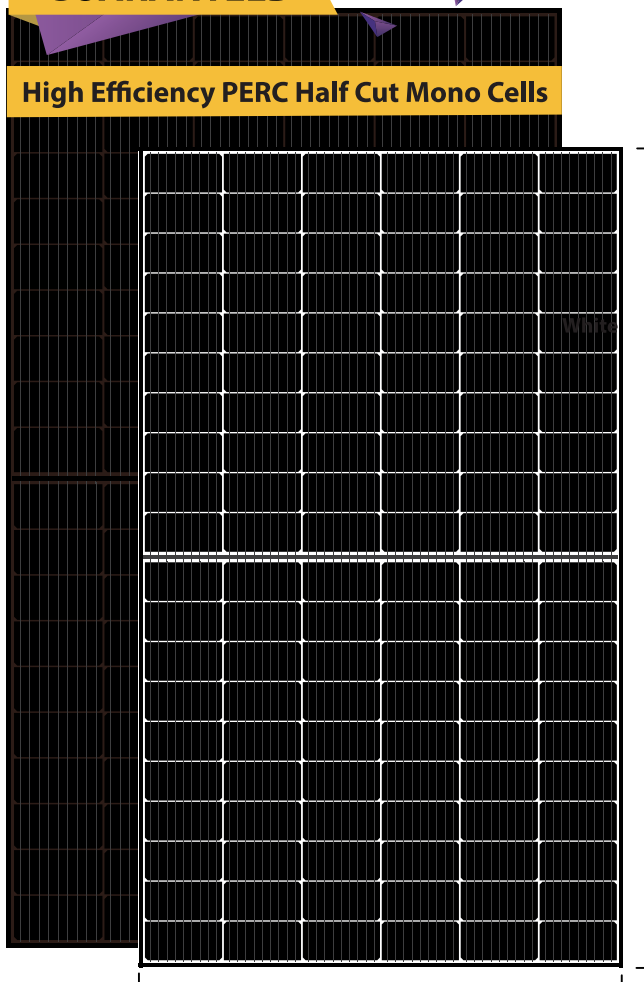

Weight 19.5 kg

Loading Capacity

Container	40'HQ Container	Pallet	Pallet	Small Pac
PCS	1001 PCS	(36 PCS)	36 PCS	5 PCS)

Electrical Characteristics @ STC

Item no.	Pmax	Vmp	Imp	Voc	Isc	Mod. Efficiency
HS380M-60-166	380W	34.60V	10.99A	41.70V	11.98A	20.9%
HS385M-60-166	385W	35.00V	11.01A	41.50V	11.83A	21.1%
HS390M-60-166	390W	35.20V	11.09A	41.70V	11.92A	21.4%

*STC: AM 1.5, Irradiance 1000W/ m², module temperature 25°C AM=1.5

Electrical Characteristics @ NMOT


Item no.	Pmax	Vmp	Imp	Voc	Isc	Mod. Efficiency
HS380M-60-166	281W	34.24V	8.67A	39.40V	6.67A	20.9%
HS385M-60-166	286W	32.20V	8.61A	39.30V	9.55A	21.1%
HS390M-60-166	290W	34.40V	8.68A	39.50V	9.62A	21.4%

*NMOT: Irradiance 800W/ m², ambient temperature 25°C wind speed 1m/s

Technical Characteristics

Cells	Mono (166 x 83 mm)
Quantity	120 (6 x 20)
Size	1755 x 1038 x 30 mm
Glass	Tempered High Transmission Glass
Frame	Silver/Black
Backsheet	White/Black
Junction Box	TÜV certified IP68
Series Fuse Rating	20A x 3 dioden
Maximum System Voltage	1500V DCTÜV
Cables	1100mm - / 4.0 mm ²
Test Standard Condition	AM=1.5 E=1000/ m ² TC=20°C
NOCT	45°C +/- 2°C
Temperature Coefficients:	Pmax -0.39%/K Voc -0.29%/K; Isc 0.049%/K

I-V Curve

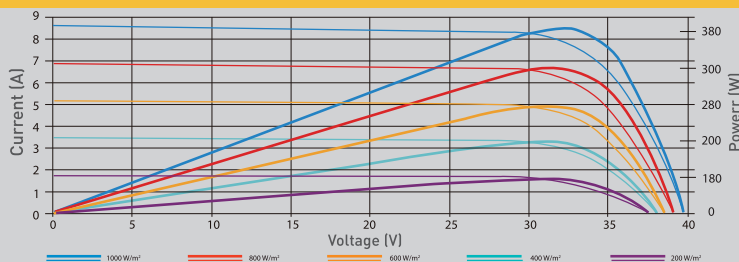

Waarschuwing: lees eerst de installatie handleiding voordat je het product verwerkt.

©2022 Hanover Solar B.V All rights reserved, The specification included in this datasheet are subject to change without notice.

HANOVER NEW ENERGY PTY LTD
7 Koorabel Place
Baulkham Hills NSW 2153
AUSTRALIA
+61 (0) 881 215 838



HANOVER SOLAR GmbH
Herrenstrasse 13
D30159 Hannover
GERMANY
+49 (0) 511 711 090 0539

HANOVER SOLAR BV
Kingsford 151 Amsterdam
1043RG
NETHERLANDS
+31(0) 165 203 842