

Wall - Mounted

Datasheet Residential BESS

Intelligent

Adjustable parameter settings
LED indication of product status

Safety

Short-circuit protection
Adjustable overcurrent protection

Flexible Configuration


Multiple batteries can be connected in parallel to expand capacity

Self-cooling Mode

Both noise and power consumption of the system itself are reduced significantly

PERFORMANCE SPECIFICATIONS		
Model	HZEB-LCT-2.5	HZEB-LCT-5-24
Cell type	LiFePO4	LiFePO4
Rated power	2.560kWh	5.248kWh
Rated capacity	100Ah	205Ah
Rated voltage	25.6V	25.6V
Working voltage	22.4~28.8V	22.4~28.8V
Charge-discharge rate	0.5C	0.5C
Standard charge-discharge current	50A	100A
Maximum charge-discharge current	100A	100A
Dimensions	520*350*150mm	535*360*240mm
Weight	32kg	54kg
Protection level	IP20	IP20
Charge temperature range	0~55°C	0~55°C
Discharge temperature range	-10~55°C	-10~55°C
Cycle life	≥6000 times, 25±2°C,80%DOD, 0.5C, 70%SOH	≥6000 times, 25±2°C,80%DOD, 0.5C, 80%SOH
Communication mode	CAN/RS485	
Expandability	Up to 15 modules can be connected in parallel	
Protection	Short circuit protection, overcharge protection, discharge protection, overcurrent protection, over temperature protection	
Certification	MSDS/UN38.3	
Compatible inverter	Growatt/Deye/Schneider/MEGAREVO, etc.	

Text and images correspond to the current state of technology at the time of printing, subject to modifications. All information is without guarantee in spite of careful editing—liability excluded

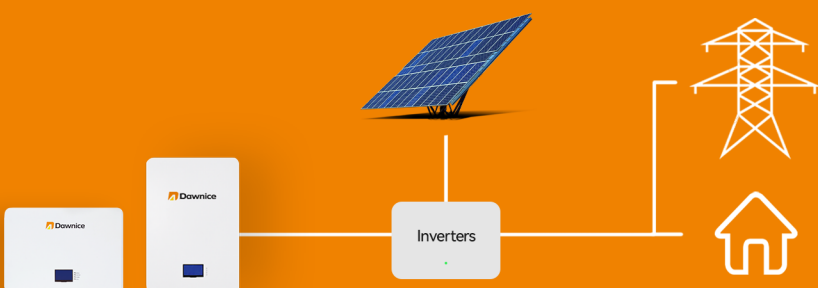

- High-security technology ensures stable and excellent performance
- Compatible with multiple inverters including Sungrow DEYE Solis Growatt Voltronic
- It provides highly efficient energy solutions for household scenarios and small commercial scenarios