


ONYX

530-560W

High Efficiency PERC Bifacial Module

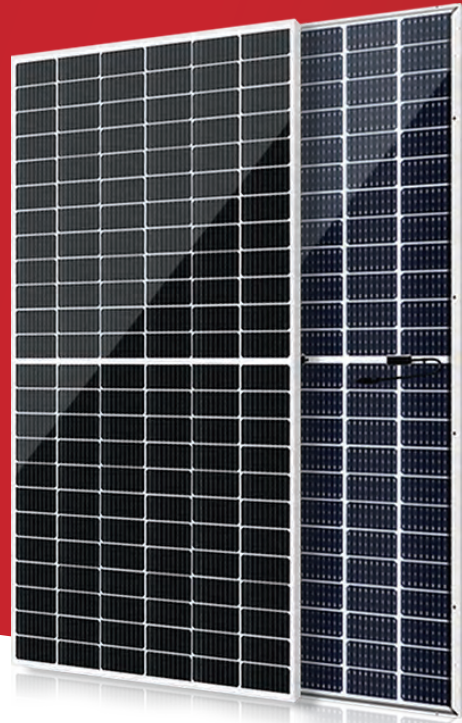

Bifacial technology enables additional energy harvesting from rear side (up to 30%)



Excellent low irradiance performance.



Better light trapping and current collection to improve module power output and reliability.



Industry leading lowest thermal co-efficient of power.



Optimized electrical design and lower operating current for reduced hot spot loss and better temperature coefficient.




Certified to withstand: wind load (2400 Pa) and snow load (5400 Pa).



100% triple EL test enabling remarkable reduction of hidden crack rate of modules

LINEAR PERFORMANCE WARRANTY

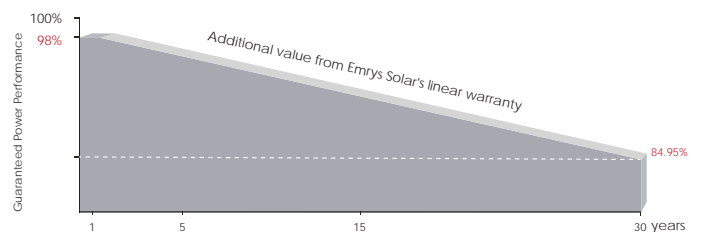

30 years
Product Workmanship Warranty

30 years
Output Power Warranty

COMPREHENSIVE CERTIFICATES



ELECTRICAL DATA(STC)

Model Number	ES530M72-S2-BF	ES540M72-S2-BF	ES550M72-S2-BF	ES560M72-S2-BF
Peak Power Watts- $P_{MAX}(Wp)^*$	530	540	550	560
Power Output Tolerance	0~5W			
Open Circuit Voltage- $V_{oc}(V)$	49.00	49.40	49.80	50.20
Short Circuit Current- $I_{sc}(A)$	13.76	13.87	13.99	14.12
Maximum Power Voltage- $V_{MPP}(V)$	40.80	41.20	41.60	42.00
Maximum Power Current- $I_{MPP}(A)$	13.00	13.11	13.23	13.35
Efficiency(%)	20.51	20.9	21.28	21.73

STC :Irradiance 1000w/m²,Cell Temperature 25°C,Measure Tolerance :+/- 3%

ELECTRICAL DATA(NOCT)

Maximum Power- $P_{MAX}(Wp)^*$	395	402	410	417
Open Circuit Voltage- $V_{oc}(V)$	45.90	46.30	46.60	46.85
Short Circuit Current- $I_{sc}(A)$	11.09	11.18	11.28	11.35
Maximum Power Voltage- $V_{MPP}(V)$	38.00	38.40	38.80	39.42
Maximum Power Current- $I_{MPP}(A)$	10.40	10.49	10.58	10.65

NOCT:Irradiance at 800W/m²,Ambient Temperature 20°C,Wind Speed 1m/s

MECHANICAL DATA

Dimensions	2279 x 1134 x 30 mm
Weight	31.8kg
Cell Type	Monocrystalline PERC
Cell Size	182x91 mm
Cell Number	144
Glass Type	Tempered, Anti-reflection Coating
Glass Thickness	2.0mm + 2.0mm
Encapsulant Type	POE
Frame Type	Anodized Aluminium Alloy
Junction Box Diodes	3
Junction Box Protection Class	IP68
Connector Type	MC4 or MC 4 Compatible
Cable	1x4mm ² ,(+) : 350mm , (-) : 350mm or Customized Length

TEMPERATURE RATINGS

NOCT	41°C(±3°C)
Temperature Coefficient of P_{MAX}	-0.36%/°C
Temperature Coefficient of V_{oc}	-0.28%/°C
Temperature Coefficient of I_{sc}	+0.05%/°C

(Do not connect Fuse in Combiner Box with two or more strings in parallel connection)

MAXIMUM RATINGS

Operational Temperature	-40~+85 °C
Front/Rear Side Load	5400/2400pa
Max Series Fuse Rating	30A
Max System Voltage	1500V (IEC)
Fire Rating	Class A


WARRANTY

30 years Product Workmanship Warranty
30 years Output Power Warranty

PACKAGING CONFIGURATION

Modules per box:36 pieces
Modules per 40' container:720 pieces

DIMENSIONS OF PV MODULE(mm)

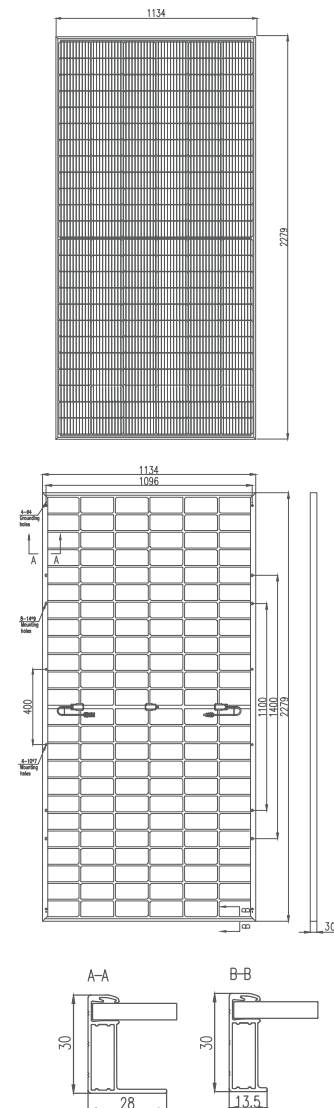

CURVES OF PV MODULE

