

## IBEX 108MHC-EIGER FULL BLACK

400

IBEX HIGH EFFICIENCY MONOCRYSTALLINE SOLAR MODULES WITH HALF CELL TECHNOLOGY

0+5

Positive power tolerance (0+5W) guaranteed



High performance under low light.  
Works at cloudy, rainy days



The monolithic perc cell structure technology (low resistance characteristics) is adopted (the maximum conversion efficiency of modules is up to 20.48%)



EXTREME WEATHER RATING. High-tech aluminium alloy frame, certified for high snow (5400 Pa) and wind loads (2400 Pa)



Reduced resistance between cells Less micro cracks, higher output power



SUPER STRONG FRAME. The overflow tank is waterproof with double layers. Aluminum frame enhances the mechanical load strength by 10%

- IEC61215(2016), IEC61730(2016)
- ISO9001:2015: Quality Management System
- ISO45001:2018 Occupational health and safety management systems



# IBEX 108MHC-EiGER 400 FULL BLACK

MONOCRYSTALLINE SOLAR MODULE

## ELECTRICAL DATA AT STC

Module Type	400W	
	<b>STC</b>	<b>NOCT</b>
Rated power P <sub>mp</sub> [Wp]	400	302
P <sub>mp</sub> range to	0/+5W	
Rated current I <sub>mp</sub> [A]	12.74A	10.27A
Rated voltage V <sub>mp</sub> [V]	31.40V	29.41V
Short-circuit current I <sub>sc</sub> [A]	13.63A	10.89A
Open-circuit voltage U <sub>oc</sub> [V]	37.49V	35.54V
Efficiency at STC up to	20.48%	
Application Class	Class A	

## LIMITING VALUES

Max. system voltage [V]	1500V DC (IEC)
Max. return current [I]	25A
Operating Temperature	- 40 to +85°C
Max. tested pressure load [Pa] <sup>2</sup>	5400
Max. tested tensile load [Pa] <sup>2</sup>	2400

## TEMPERATURE COEFFICIENT

I <sub>sc</sub>	V <sub>oc</sub>	P <sub>max</sub>
0.045% /°C	-0.28% /°C	-0.36% /°C



## SPECIFICATIONS

Number of cells	108 (12 x 9)   182x91 mm
Dimensions	1724x1134x30 mm
Weight	21.5 kg
Front-side glass	3.2 mm tempered Low Iron Glass
Frame	Stable, anodised aluminium frame, black
Junction box	Split Junction Box (IP68)
Cable	4 mm <sup>2</sup> , +300mm,-400mm Cust.Length
Diodes	3 Diodes
Plug-in connection	MC4 Compatible
Hail test (max. hailstrom)	Ø45mm   23 m/s   83 km/h

## PACKING CONFIGURATION

Container	40 HQ	Pieces Per Pallet	36
Pallets Per container	26	Pieces per Container	936

The specifications and average values can vary slightly. Relevant is the corresponding data of the individual measurement. Specifications are subject to change without notice. Measurement tolerance depending on equipment: rated power +/- 3%, other values +/- 10%. All information given in this data sheet corresponds to DIN EN 50380. A potential light-induced degradation of the power after commissioning is not considered here. Further information in the installation manuals. 1 The specific warranty conditions are given under [www.swissenergy-solar.ch](http://www.swissenergy-solar.ch) | 2 Horizontal mounted | 3 Tolerance L/W = +/- 3 mm. H +/- 2mm, the dimensions given in the order confirmation will be decisive | 4 Location and dimensions of holes on request

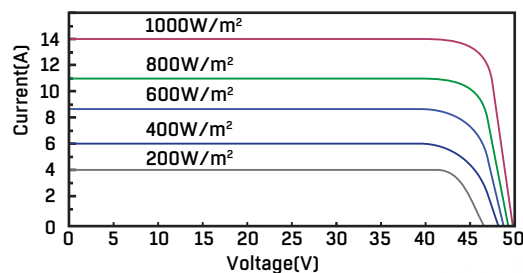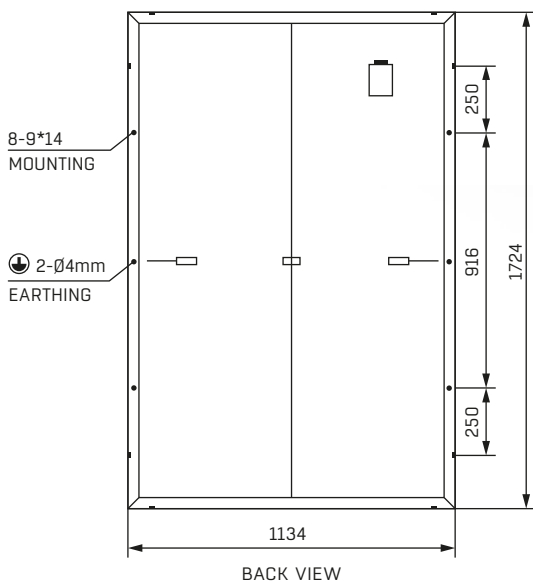

## WARRANTY

**20 YEARS**  
PRODUCT WARRANTY

**30 YEARS**  
POWER WARRANTY

swiss solar

SWISSENERGY-SOLAR.CH