

Flexible Module-FeiYan

CEC6-72MHF

420~435W
POWER OUTPUT RANGE

19.0%~19.6%
MODULE EFFICIENCY

PRODUCT CHARACTERISTICS

- ◆ **Super Light:** by optimizing the material design, eliminating the glass and frame, the total weight of module is only **6KG**, **70%** lighter than the normal glass module
- ◆ **Super Soft:** using high polymer flexible materials, improving flexibility of module, The maximum bending radius is **0.45m**
- ◆ **Convenient:** through high-reliability structural adhesive/tape installation scheme, eliminating the traditional mounting system, saving **40%** on installation costs
- ◆ **Safe:** no drilling for installation, more friendly to the roof
- ◆ **Guaranteed output:** 0~+5W



LINEAR WARRANTY AND CERTIFICATION



1st year Power output not less than 97%



Power output not less than 89.3% within 12 years




Power output not less than 80.2% within 25 years




Warranty for product materials and processes within 10 years

Assembly Drawing

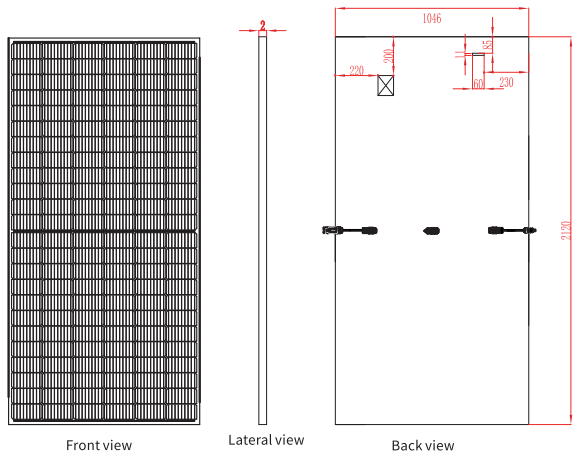

I-V Curve (430W)

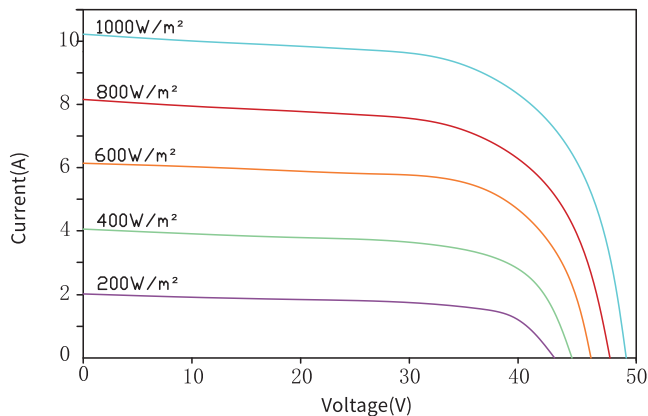

Mechanical Characteristics

Cell type	166×83mm monocrystalline silicon solar cells, 144cells (6×24)
Positive material	High light transmittance polymer composites
Junction Box	IP Grade: IP68

Temperature Rating

Nominal Module Operating Temperature (NMOT)	42°C±2°C
Maximum Power (Pmax) Temperature Coefficient (δ (%/°C))	-0.38
Open-circuit voltage (Voc) Temperature coefficient (β (%/°C))	-0.28
Short circuit current (Isc) Temperature coefficient (α (%/°C))	0.02

Parameters of Module

Electrical parameters (Standard test condition)	CEC6-72-420MHF	CEC6-72-425MHF	CEC6-72-430MHF	CEC6-72-435MHF
Maximum power-Pmax(Wp)	420	425	430	435
Maximum operating voltage -Vmp(V)	41.18	41.22	41.27	41.32
Maximum operating current -Imp(A)	10.20	10.31	10.42	10.53
Open-circuit voltage -Voc(V)	49.67	49.73	49.79	49.85
Short-circuit current-Isc(A)	10.71	10.81	10.91	11.01
Maximum system voltage -Vdc(V)	1000	1000	1000	1000
Module efficiency(%)	19.0%	19.2%	19.4%	19.6%
Power tolerance(W)	0/ + 5W	0/ + 5W	0/ + 5W	0/ + 5W

Measured values under STC (temperature 25°C, air quality AM1.5, irradiance 1000W/m²)

Limit Parameters

Operating temperature	-40°C to +85°C
Maximum fuse current rating	20A

Physical Parameter

Dimension	2120*1046*2mm
Cable Length	250mm; Customizable
Weight	6Kg

Mode of Packing

40'HQ Container	Pieces per pallet	44 pcs/pallet
	pallets per container	20 pallets/40'HQ
	Pieces per container	880pcs/40'HQ



Make Power Generation More Green

No.9,Beishan Road,New District,Zhenjiang, Jiangsu,China 212132

Web: www.cecepsolar.com

