SOLAR PHOTOVOLTAIC

Extension cords for power generation systems

Tin-plated copper core
Flame retardant and high and low temperature resistant
Ultraviolet resistant

Single/Double Head Customizable



FEATURES & BENEFITS

Fine workmanship Safe and Reliable





Strict Quality Control



Tinned Copper



Flame Retardant



High and Low Temperature Resistance



Self-locking



Convenient installation

Two models to choose from





PRODUCT PARAMETER

Contact Customer Service Learn More

·Pseudolaric acid

Solar PV Extension Cord

·Insulation material

PC EXL9330/XLPO

·Rated voltage

1500V DC

·Ambient Temperature

-45°C~+85°C

·Rated Current

30A

·Conductor Material

Tinned copper

·Contact Resistance

≤0.5MΩ

·Cable specifications

2.5/4/6mm²

·Flame Class

UL94V-0

·Wiring Method

Cladding

VARIOUS PRODUCTS CAN BE CUSTOMISED



Energy Storage Battery Connection Cord



Battery Brass Buckle



MC4 Dual Parallel Extension Cable



Anderson Joint



Solar Streel Light




MC4 Dual Parallel Extension Cable




Automotive Junction Box



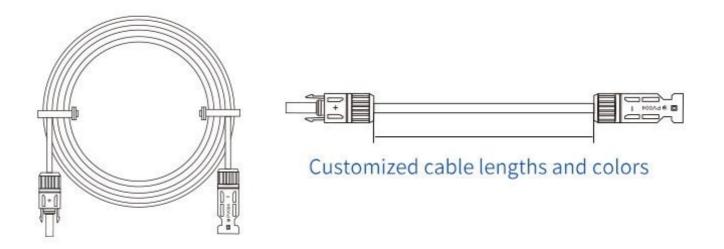

Typically used for DC output on the solar panel side orto extend the connection to the solar panel side output.

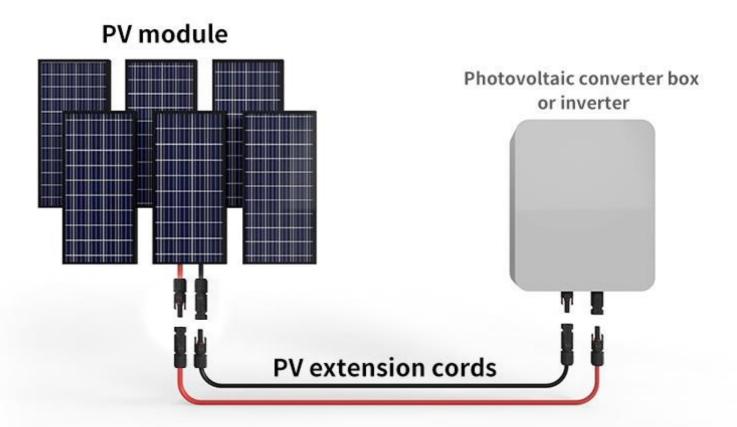

Double protection Tinned copper core

PV Specialty Materials

Safe and secure



Waterproofing

Connector Pairing Waterproof and Dustproof

1500V

Passed strict testing, multiple waterproof design, connectors can be customized



Multi-seal protection Multiple seal design





IP67 protection rating Rigorous testing

ge: 1000VDC ent: 30A 61140): II Protection: IP65/IP67 mperature: -40°C ~ +85°C

Product Packaging

Product packaging diversity reference, can be customized according to demand boxes, bags, hanging cards, etc.packages.





DROP CARD PACKAGING



CUSTOMIZED CARTON PACKAGING



SHRINK BAGS

CERTIFICATES

Regular manufacturers, complete qualification, buy with peace of mind Photovoltaic cable TÜV, IEC, CQC, CE, RoHS certification







