

POWER+ TOPCON BIFACIAL HALF CELL MODULE

SL5N144D

605 | 610 WATT

ELECTRICAL DATA	STC	NMOT	STC	NMOT
RATED POWER In Watts-Pmax(Wp)	605	458	610	462
Maximum Power Voltage-Vmpp(V)	43.94	41.12	44.11	41.3
Maximum Power Current-Impp(A)	13.77	11.14	13.83	11.19
Open Circuit Voltage-Voc(V)	52.6	50.05	52.8	50.24
Short Circuit Current-Isc(A)	14.56	11.65	14.63	11.7
Module Efficiency(%)	22.40%		22.60%	



STC: Irradiation 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.
 NOCT: Irradiation: 800 W/m², ambient temperature: 20°C, air mass: 1.5, wind speed 1 m/s

ELECTRICAL CHARACTERISTICS WITH DIFFERENT REAR SIDE POWER AGAIN(REFERENCE TO 610WATT FRONT)	5%	10%	15%	20%	25%
Pmax gain (%)					
Maximum Power (Pmax/W)	641	671	702	732	763
Maximum Power Voltage (Vmpp/V)	44.11	44.11	44.11	44.11	44.11
Maximum Power Current (Impp/A)	14.53	15.21	15.91	16.59	17.3

MECHANICAL CHARACTERISTICS	
Solar Cells	Monocrystalline, SMBB
Cell Configuration	144 cells(6*12*2)
Module Dimensions	2382*1134*30mm
Weight	33.10kg
Glass	High Transmission, Low Iron, Tempered ARC Glass
Back Sheet	2.0mm Glass
Frame	Anodized Aluminium Alloy, Silver
J-Box	IP68, 3bypass diodes
Cables	4mm ² , (+)380mm, (-)380mm or customized length
Connector	MC4 Compatible

TEMPERATURE & MAXIMUM RATINGS	
Nominal Module Operating Temperature (NMOT)	
Temperature Coefficient of VOC	-0.26% / °C
Temperature Coefficient of ISC	+0.046% / °C
Temperature Coefficient of PMAX	-0.30% / °C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	25A


PACKAGING CONFIGURATION	
	40 FT (HQ)
Number of Modules Per Container	720
Number of Modules Per Pallet	36
Number of Pallets Per Container	20

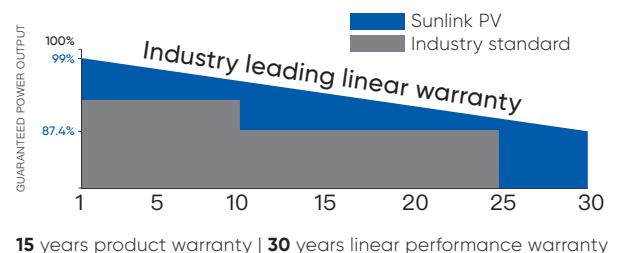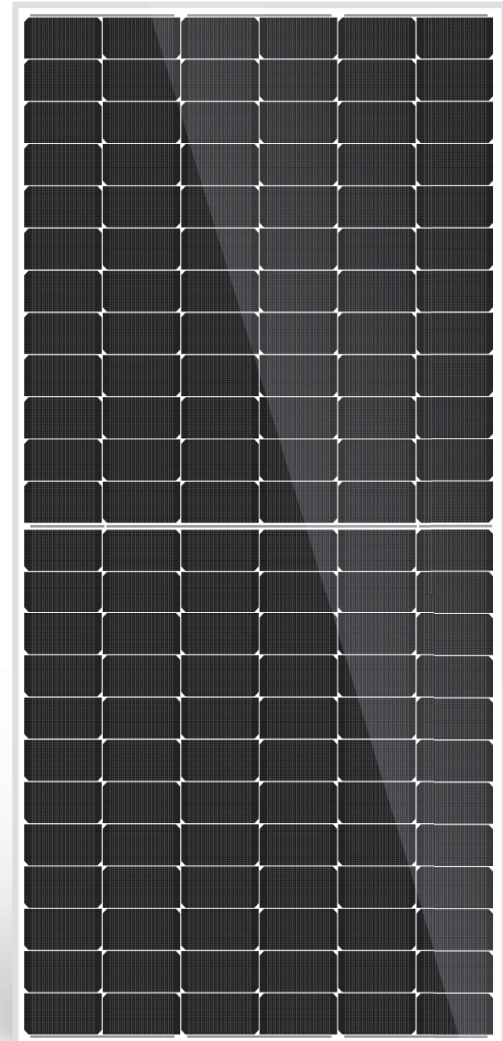


POWER+ TOPCON BIFACIAL HALF CELL MODULE

SL5N144D 605 | 610 WATT



BACK OVERVIEW

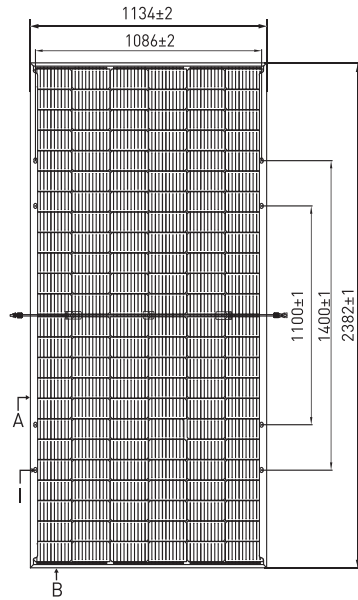

DRAWINGS (MM)

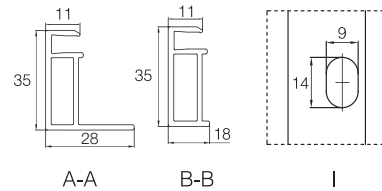

CURRENT-VOLTAGE & POWER-VOLTAGE CURVES (605 WATT)

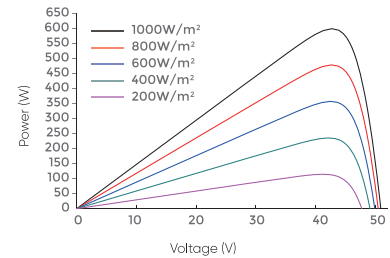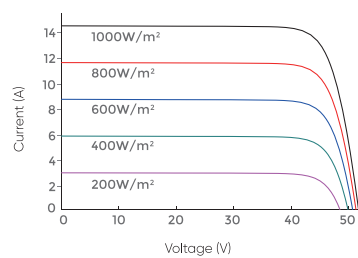

HIGHLIGHTS

$+ \frac{W}{m^2}$

HIGHER EFFICIENCY

- Module efficiency high to 22.6% ensure less BOS cost
- Gain more solar power per square meter

$\frac{15}{30}$

LONGER WARRANTY

- N-type TOPCON technology ensures 15-year product warranty and 30-year power warranty

$\leq 1\%$
 $\leq 0.4\%$

LESS DEGRADATION

- 1st year degradation < 1%
- Annual degradation < 0.4%

$\geq 75\%$

HIGHER BIFACIALITY

- 75%-80% Bifaciality ensures to gain more solar energy from backside

$\frac{\%}{^{\circ}C}$
 -0.3

LOWER TEMPERATURE COEFFICIENT OF P_{MAX}

- TOPCON modules' coefficient of P_{max} low to -0.3%/C helps gaining more power at sunny days.