



Model: AS-S144-M10H

Anglo Solar, 635 Bath Road
Slough, SL1 6AE, UK
Phone/WhatsApp: +44 7963 323144
Email: info@anglosolar.com
www.anglosolar.com

POWER OUTPUT

530-550W Mono Black Half Cut

Half cut cell technology can reduce the internal power loss and improve component overall power. Excellent heat dissipation avoids hot spot production

Designed for high voltage systems of up to 1500 VDC, increasing the string length of solar systems and saving on BoS costs



Microcrack resistant double glass structure enhances reliability, triple EL tested for high quality control

All the modules are sorted and packaged by amperage, reducing mismatch losses and maximising system output

Advanced surface treatment, lower surface reflection and multi-BB cell design can reduce the series resistance

Positive tolerance 0/+5w guaranteed

- Max Module Efficiency: 21.3%
- No. of Cells: 144 (2 x 72), 182mm
- Weight: 28.6 kg
- Dimensions: 2279mm x 1134mm x 35mm
- Monocrystalline 182x182mm

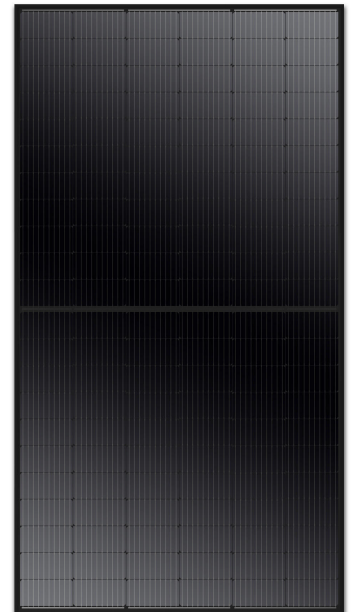

30 YEAR
EUROPEAN
PERFORMANCE
WARRANTY



12 YEAR
PRODUCT
WARRANTY

* Specifications are subject to change without further notification

