

UP-ST3000-2



Specification		
Nominal Voltage	2V	
Nominal Capacity (10HR)	3000.0AH	
Dimension	Length	709±3mm (27.91 inches)
	Width	350±3mm (13.78 inches)
	Container Height	337±3mm (13.27 inches)
	Total Height (with Terminal)	347±3mm (13.66 inches)
	Approx Weight	Approx 181.0kg (399.1lbs)
Terminal	T11	
Container Material	ABS	
Rated Capacity	3150.0AH/157.5A	(20hr, 1.80V/cell, 25°C/77°F)
	3000.0AH/300.0A	(10hr, 1.80V/cell, 25°C/77°F)
	2610.0AH/522.0A	(5hr, 1.75V/cell, 25°C/77°F)
	2268.0AH/756.0A	(3hr, 1.75V/cell, 25°C/77°F)
	1821.0AH/1821.0A	(1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	24000A (5s)	
Internal Resistance	Approx 0.2mΩ	
Operating Temperature Range	Discharge: -15~50°C (5~122°F)	
	Charge : 0~40°C (32~104°F)	
	Storage : -15~40°C (5~104°F)	
Nominal Operating Temperature Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 900.0A.Voltage. 2.4V~2.5.0V at 25°C (77°F) Temp. Coefficient -5mV/°C	
Standby Use	No limit on Initial Charging Current Voltage. 2.25V~2.3V at 25°C (77°F) Temp. Coefficient -3mV/°C	
Capacity affected by Temperature	40°C (104°F) 103%	
	25°C (77°F) 100%	
	0°C (32°F) 86%	
Self Discharge	Batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required.	

Constant Current Discharge (Amperes) at 25°C (77°F)											
F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	2300.4	1824.0	1497.0	899.2	695.0	570.8	486.0	424.5	342.0	286.5	152.0
1.80V/cell	2468.3	1919.0	1590.0	948.7	729.0	596.3	506.4	443.5	355.1	300.0	157.5
1.75V/cell	2613.8	2017.8	1659.0	987.9	756.0	616.5	522.0	454.0	361.9	3030.0	159.1
1.70V/cell	2742.5	2093.8	1717.1	1017.0	776.0	630.0	531.0	462.0	367.5	306.0	160.7
1.65V/cell	2876.9	2185.0	1779.0	1047.6	793.0	643.5	542.4	470.0	372.8	309.9	162.7
1.60V/cell	2976.0	2244.0	1821.0	1072.5	810.0	652.5	550.2	476.5	377.6	313.5	164.6



Constant Power Discharge (Watts) at 25°C (77°F)											
F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	4396.2	3507.0	2895.6	1749.0	1358.2	1119.4	957.4	838.8	678.7	569.8	302.6
1.80V/cell	4679.1	3665.3	3058.4	1836.4	1418.0	1165.5	993.2	872.8	702.6	595.8	313.1
1.75V/cell	4917.4	3831.4	3177.0	1904.9	1466.6	1200.9	1020.3	890.7	714.3	601.0	315.9
1.70V/cell	5116.2	3948.1	3270.9	1952.7	1499.8	1222.2	1034.9	905.1	724.7	606.6	318.8
1.65V/cell	5326.8	4096.9	3369.6	2002.9	1525.9	1244.2	1053.3	917.9	733.2	613.3	322.5
1.60V/cell	5455.0	4168.2	3425.3	2037.8	1550.5	1256.1	1064.3	927.7	741.3	619.4	325.7




UP-ST3000-2

Dimensions


T11 Terminal
Unit: mm [inches]

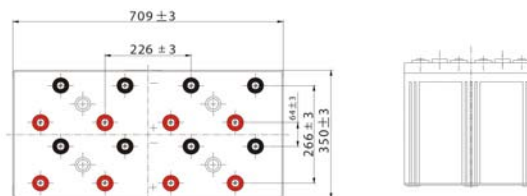


Discharge Characteristics

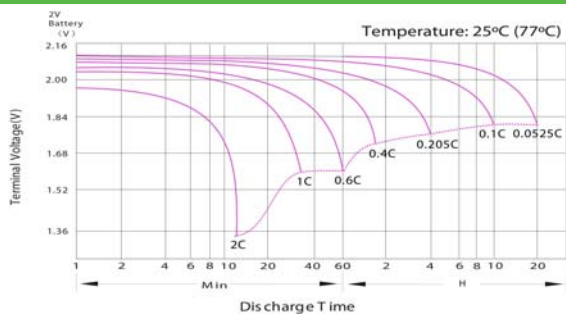


Effect of Temperature on Long Term Float Life

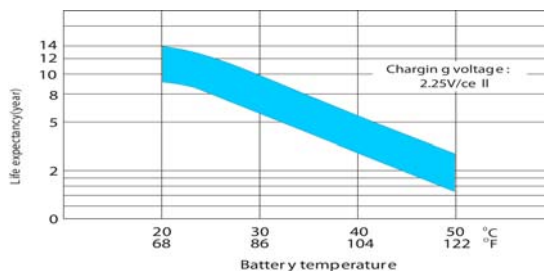


Float Charging Characteristics

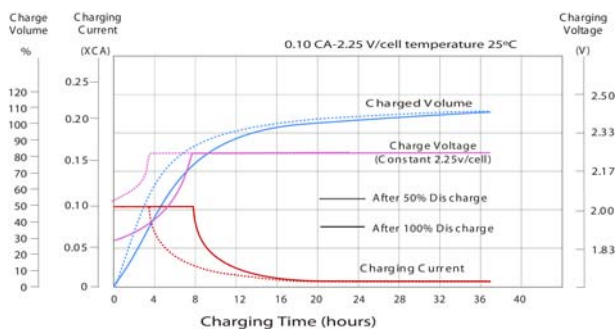


Cycle Life in Relation to Depth of Discharge

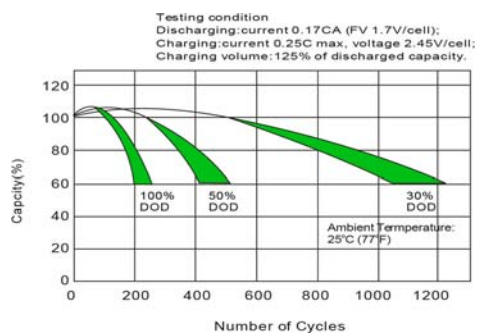

Temperature Effects in Relation to Battery Capacity

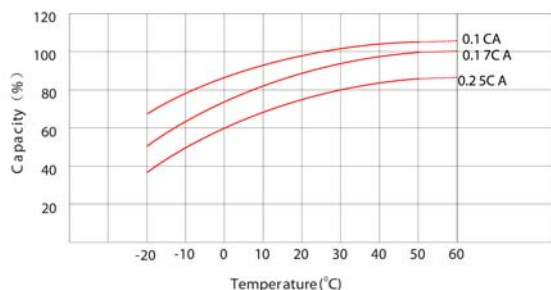

Self Discharge Characteristics

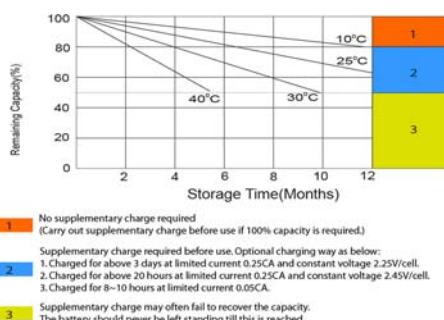

Poligono industrial La Dehesa
C/ Dehesa Vieja, nº2 Nave 16
28052 Madrid (Spain)
Tel. (+34) 918 021 649
Fax. (+34) 917 750 542
info@masterbattery.es

