









# YUKON Series

Half-Cell Monofacial Module


**445-460Wp** | **21.25%**  
 Module Power Output | Max Efficiency



## Key Features

-  High module conversion efficiency
-  Better temperature coefficient
-  Super multi busbar technology
-  Low attenuation long warranty
-  Superior load capacity
-  Aesthetic appearance
-  USA based liability insurance
-  Houston, Texas based company

## Warranty

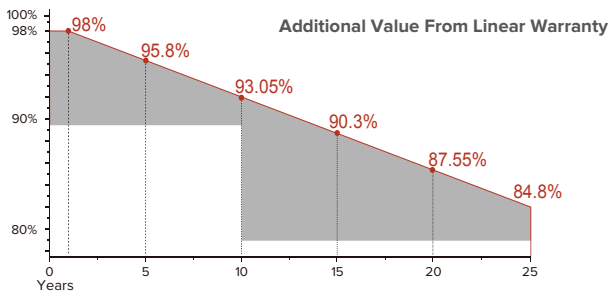

**25** <Years> Guarantee on product material and workmanship

**25** <Years> Linear power output warranty

## Product Certification

IEC61215:2016; IEC 61730:2016; UL61730

IEC62804 PID

IEC61701 Salt Mist

IEC62716 Ammonia Resistance

IEC60068 Dust and Sand

IEC61215 Hailstone

Fire Type (UL61730):Type1

ISO14001:2015; ISO9001:2015; ISO45001:2018



## About SEG Solar

SEG Solar is a leading manufacturer of high-performance solar panels for residential, commercial, and utility applications. The company, headquartered in Houston, Texas, is committed to providing cost-effective and reliable solar solutions that help customers reduce their energy costs and carbon footprint.



Download Datasheet

## Electrical Characteristics

Module Type	SEG-445-BMB-HV		SEG-450-BMB-HV		SEG-455-BMB-HV		SEG-460-BMB-HV	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power -Pmp(Wp)*	445	333	450	337	455	341	460	345
Open Circuit Voltage -Voc(V)	41.22	38.41	41.32	38.57	41.42	38.67	41.52	38.74
Short Circuit Current -Isc(A)	13.66	11.04	13.76	11.12	13.86	11.20	13.96	11.28
Maximum Power Voltage -Vmp(V)	34.18	31.82	34.28	31.98	34.39	32.06	34.49	32.25
Maximum Power Current -Imp(A)	13.03	10.48	13.13	10.56	13.24	10.64	13.34	10.71
Module Efficiency(%)	20.56		20.79		21.02		21.25	
Power Tolerance(W)	(0, +4.99)							
Maximum System Voltage	1500V DC							
Maximum Series Fuse Rating	25 A							

STC: Irradiance 1000 W/m<sup>2</sup> module temperature 25°C AM=1.5

NOCT: Irradiance 800W/m<sup>2</sup> ambient temperature 20°C module temperature 45°C wind speed: 1m/s


\*Measuring tolerance: ±3%

## Mechanical Specifications

External Dimension	1909 x 1134 x 35 mm
Weight	22.3 kg
Solar Cells	PERC Mono 182 x 91mm(120 pcs)
Front Glass	3.2mm AR coating tempered glass
Frame	Black anodized aluminium alloy
Junction Box	IP68 / 3 diodes
Connector Type	PV-CO02-xy / MC4
Cable Type	12 AWG PV Wire (UL)
Cable Length	Portrait: 400 mm(+) / 200 mm(-) Landscape: 1200 mm(+) / 1200 mm(-) or customized length
Mechanical Load(Front)	5400 Pa / 113 psf*
Mechanical Load(Rear)	2400 Pa / 50 psf*

\*Refer to SEG installation Manual for details

## Technical Drawing

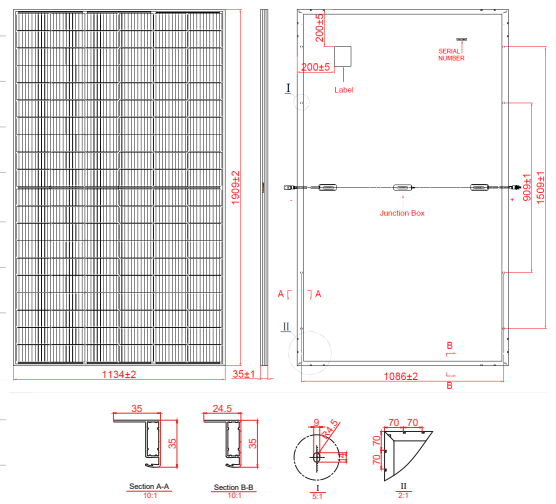

\*Refer to SEG installation Manual for details

## Packing Configuration

Container	20'GP	40'HQ
Pieces per Pallet	31	31
Pallets per Container	5	24
Pieces per Container	155	744

## Temperature Characteristics

Pmax Temperature Coefficient	-0.35 %/°C
Voc Temperature Coefficient	-0.27 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40 <sup>~</sup> +85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

## I-V Curve

