

# ASTORIOS

per aspera ad astra



## HIGH EFFICIENCY PHOTOVOLTAIC MODULE BIFACIAL, DOUBLE GLASS

ASTR 144 HCND/10 Series 575-585 Wp

TOPCON N-TYPE HALF CUT CELLS

**585 Wp**

MAXIMUM POWER OUTPUT

**22.7%**

MAXIMUM MODULE EFFICIENCY



### NEGLIGIBLE LID IMPACT

TOPCon cells exhibit an almost zero susceptibility to Light Induced Degradation, ensuring sustained high efficiency over time despite exposure to sunlight



### HOT SPOTS RISK REDUCTION

Sophisticated electrical design, cells sorting, cutting and soldering technology leads to low hot spot risk and temperature control



### HIGH EFFICIENCY

N-type cells technology provides the highest efficiency modern multi busbar configuration at affordable cost



### MULTI BUSBAR TECHNOLOGY

Better light absorption and current collection for better power output



### MINIMIZING THE SHADING IMPACT

Better partial-shade tolerance due to separated half panel string wiring



### PID RESISTANT

Selected encapsulants, precision in manufacturing quality control makes modules highly PID resistant and snail trails free



### SAND, AMMONIA AND SALT MIST RESISTANCE


Sand blowing, ammonia and salt mist resistance tests have been passed by international standards to ensure operation in harsh conditions



### SUPERIOR SAFETY AND RELIABILITY

Tested to avoid microcracks and welding cracks, can withstand high pressure loads, passed multi-step quality control

## PERFORMANCE

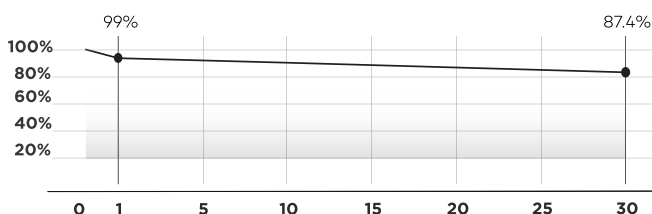

**30 YEARS**



Performance Guarantee

**20 YEARS**

Product Warranty

# ASTORIOS

per aspera ad astra

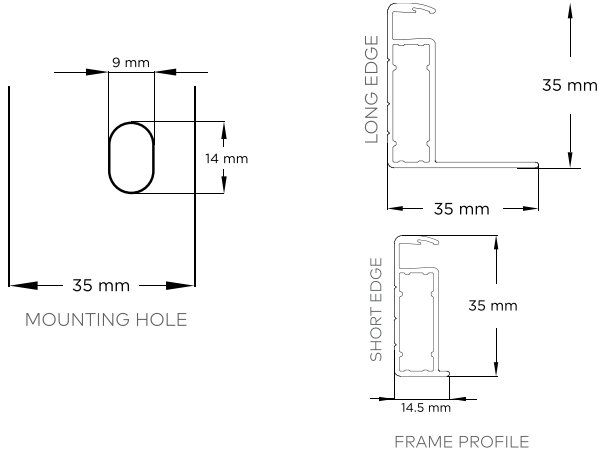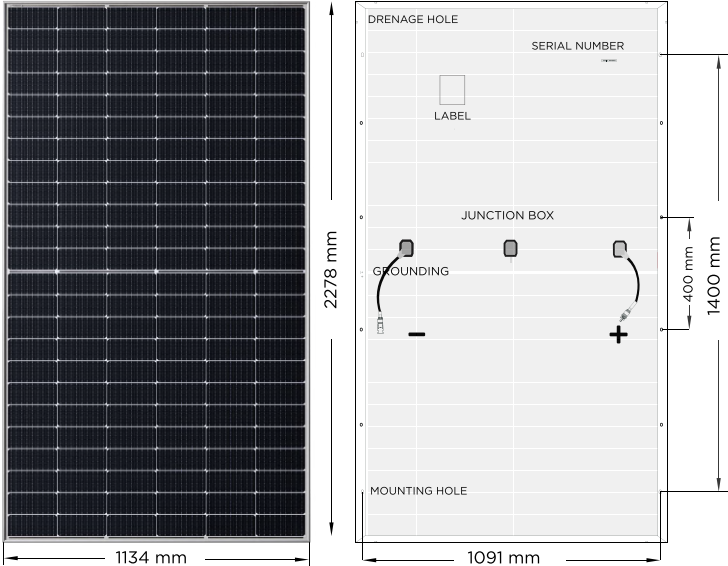

### MATERIAL CHARACTERISTICS

Dimensions	2278 x 1134 x 35 mm
Weight	32.3kg
Number of cells	144 pcs (6x24)
Glass front/rear	2mm, High transparency, AR coated
Cell layout	Half Cut N-Type, Bifacial 10BB / 16BB (182mm)
Frame	Silver color, anodized aluminum alloy
Junction box	IP68 Rated, 3 bypass diodes
Connector type	Staubli MC4-Evo 2 / MC4 (Original)
Cable	4 mm <sup>2</sup> , 300 mm

### TEMPERATURE PARAMETERS

Temperature Coefficient of Pmax	-0.30 % / °C
Temperature Coefficient of Voc	-0.25 % / °C
Temperature Coefficient of Isc	+0.046 % / °C
Operating Temperature	- 40°C to + 85°C
Normal Operating Cell Temperature (NOCT)	44±2°C

### PACKAGING INFORMATION

One pallet quantity	31 pcs
40 ft HC/HQ container	620 pcs

### MAXIMUM RATINGS

Max. System Voltage	1500V DC - (H)
Max. Series Fuse Rating	25A
Uplift load (wind)	2400 Pa*
Downforce (snow)	5400 Pa*

\*For more information please refer to Instruction Manual

MODULE TYPE 144HCND/10	575 Wp		580 Wp		585 Wp	
	STC	NMOT	STC	NMOT	STC	NMOT
<b>ELECTRICAL CHARACTERISTICS</b>						
Maximum power (Pmax/Wp)	575	432	580	436	585	440
Open circuit voltage (Voc / V)	51.27	48.33	51.47	48.46	51.67	48.60
Short circuit current (Isc / A)	14.31	11.62	14.37	11.68	14.43	11.75
Maximum power voltage (Vmp / V)	42.44	39.60	42.59	39.69	42.75	39.81
Maximum power current (Imp / A)	13.55	10.92	13.62	10.99	13.69	11.05
Module efficiency at STC (ηm / %)	22.30		22.50		22.70	
Power tolerance (Pmax)			0-+3%			

NMOT: Irradiance 800 W/m<sup>2</sup>, ambient temperature 20°C and wind speed 1 m/s  
 STC: Irradiance of 1000 W/m<sup>2</sup> with spectrum AM 1.5 and a module temperature of 25°C

### CERTIFICATES

IEC62716 (Ammonia)  
 IEC60068-2-68 (Sand)  
 IEC61215 / 61730 / 61701

