



mounting
systems



Trapeze-EW ProLine

Application	Pitched roof
Roof cladding	Trapezoidal sheet
Min. sheet thickness	Steel: 0.4 mm Aluminium: 0.4 mm
Min. bread height	From 20 mm
Roof slope	Up to 20°
Building height	Up to 20 m
PV-Modules	Framed, frameless
Module width	950 – 1052 mm
XL version 10°	1030 – 1134 mm with additional rail
Module orientation	Landscape
Module inclination	10° or 15°
Standards	Eurocode 1 – Action on structures Eurocode 9 – Design of aluminium structures
Supporting profiles	Extruded aluminium profiles (EN AW 6063 T66)
Small parts	Stainless steel (V2A)
Colour	Aluminium: plate finish
Warranty	10 years



On-roof



East-west
orientation



Framed
modules




Frameless
modules




Landscape
orientation



Trapezoidal sheet

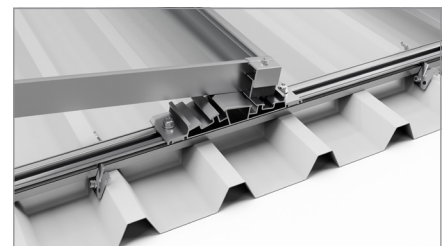

Front support

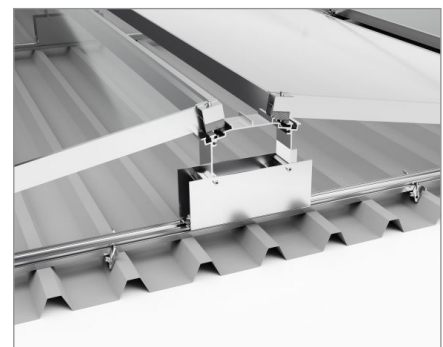

Middle support

