









ZION Series

Half-Cell Monofacial Module


365-380Wp | **20.86%**
 Module Power Output | Max Efficiency



Key Features

-  High module conversion efficiency
-  Better temperature coefficient
-  Super multi busbar technology
-  Low attenuation long warranty
-  Superior load capacity
-  Aesthetic appearance
-  USA based liability insurance.
-  Houston, Texas based company.

Warranty

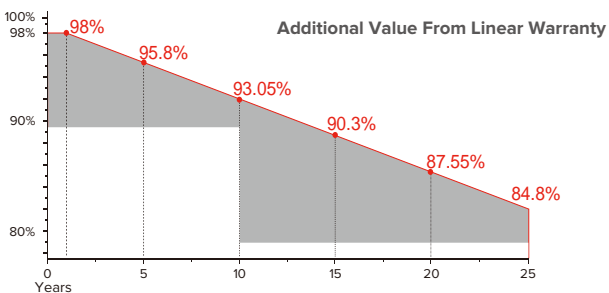

15 <Years> Guarantee on product material and workmanship

25 <Years> Linear power output warranty

Product Certification

IEC61215:2016; IEC 61730:2016; UL1703; UL61730	
IEC62804	PID
IEC61701	Salt Mist
IEC62716	Ammonia Resistance
IEC60068	Dust and Sand
IEC61215	Hailstone
Fire Type (UL61730):Type1	
ISO14001:2015; ISO9001:2015; ISO45001:2018	



About SEG Solar

SEG Solar is a leading manufacturer of high-performance solar panels for residential, commercial, and utility applications. The company, headquartered in Houston, Texas, is committed to providing cost-effective and reliable solar solutions that help customers reduce their energy costs and carbon footprint.



Download Datasheet

Electrical Characteristics

Module Type	SEG-365-BMB-HV		SEG-370-BMB-HV		SEG-375-BMB-HV		SEG-380-BMB-HV	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power -Pmp(Wp)*	365	275	370	277	375	282	380	286
Open Circuit Voltage -Voc(V)	41.40	38.60	41.60	38.80	41.80	39.00	42.00	39.20
Short Circuit Current -Isc(A)	11.26	9.10	11.34	9.17	11.42	9.22	11.50	9.28
Maximum Power Voltage -Vmp(V)	34.40	31.90	34.60	32.00	34.80	32.30	35.00	32.50
Maximum Power Current -Imp(A)	10.62	8.61	10.70	8.66	10.79	8.74	10.87	8.80
Module Efficiency(%)	20.04		20.31		20.59		20.86	
Power Tolerance(W)	(0, +4.99)							
Maximum System Voltage	1500V DC							
Maximum Series Fuse Rating	20 A							

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5

NOCT: Irradiance 800W/m² ambient temperature 20°C module temperature 45°C wind speed: 1m/s


*Measuring tolerance: ±13%

Mechanical Specifications

External Dimension	1755 x 1038 x 35 mm
Weight	19.5 kg
Solar Cells	PERC Mono 166 x 83mm(120 pcs)
Front Glass	3.2 mm AR coating tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP68 / 3 diodes
Connector Type	PV-CO02-xy / MC4
Cable Type	12 AWG PV Wire (UL)
Cable Length	Portrait: 400 mm(+)/ 200 mm(-) Landscape: 1200 mm(+)/ 1200 mm(-) or customized length
Mechanical Load(Front)	5400 Pa / 113 psf*
Mechanical Load(Rear)	2400 Pa / 50 psf*

*Refer to SEG installation Manual for details

Technical Drawing

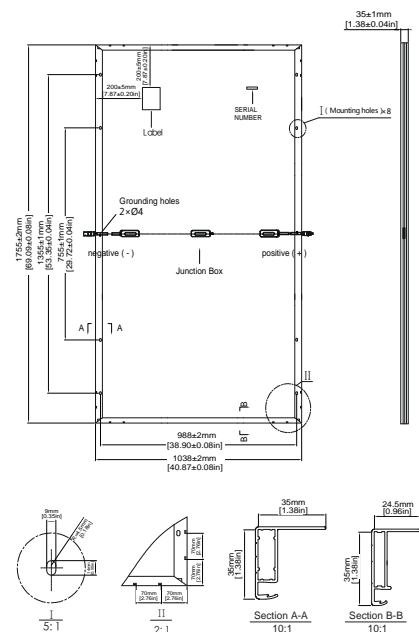

*Refer to SEG installation Manual for details

Packing Configuration

Container	20'GP	40'HQ
Pieces per Pallet	31	31
Pallets per Container	6	24
Pieces per Container	186	744

Temperature Characteristics

Pmax Temperature Coefficient	-0.35 %/°C
Voc Temperature Coefficient	-0.27 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

I-V Curve

