



GOLDEN SOLAR

Make Solar Energy More Efficient!



# JGYC-182-0BB Heterojunction Solar Cells

## ✓ Heterojunction Cell Technology

A heterojunction cell combines all the advantages of crystalline and thin-film solar technologies in a single hybrid structure.

## ✓ High Bifaciality

The bifaciality is > 95%, and the power output of HJT cells is about 1%-3% higher than that of bifacial PERC and TOPCon cells.

## ✓ Excellent Weak Light Performance

Under the lower irradiation intensity, HJT cells have an average of 1%-2% more power per watt than PERC bifacial cells.

## ✓ The Highest Efficiency


By using 182 mm N-type silicon wafer, the maximum power of half cells can reach 4.24 W, and the efficiency can be up to 25.7%.

## ✓ Higher Efficiency at High Temperature

The lowest temperature coefficient can be up to -0.254%/°C. Under high temperature environments, the output of HJT cells per W is about 0.5%-1.5% higher than that of bifacial TOPCon cells.

## ✓ Anti-PID, Anti-LID

Cells' surface is coated with TCO, so the charge will not induce polarization phenomenon on the cells' surface.

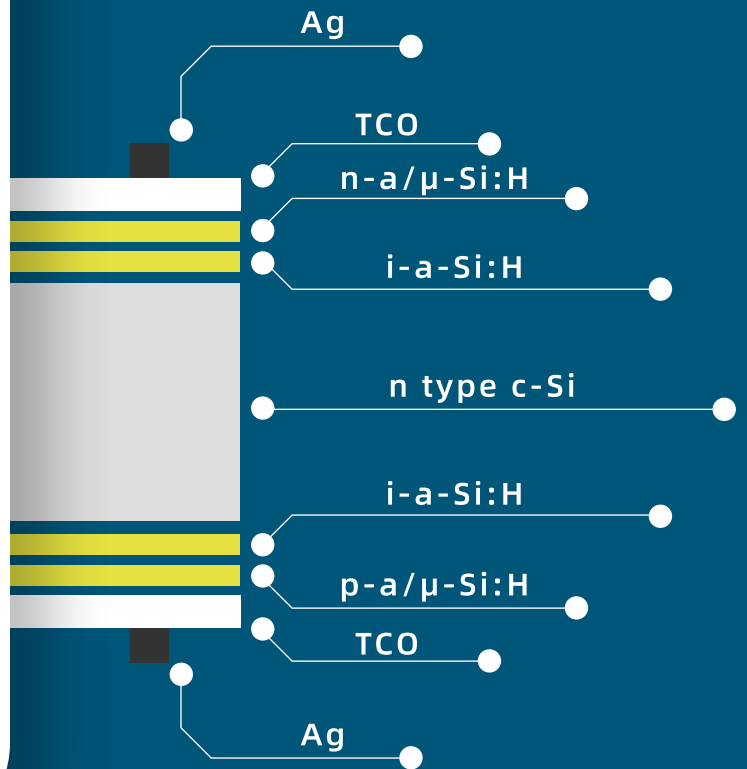


# JGYC-182-0BB




GOLDEN SOLAR

## The Cell's Front

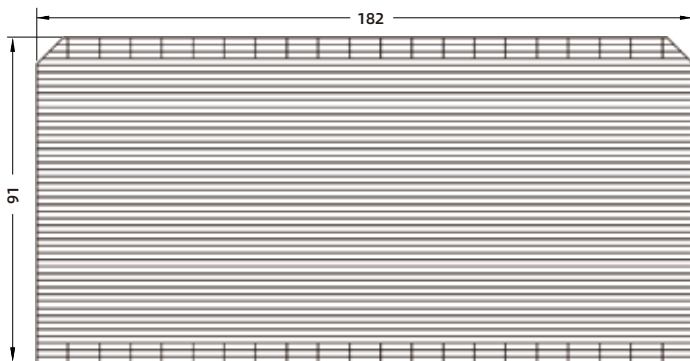

## The Cell's Back

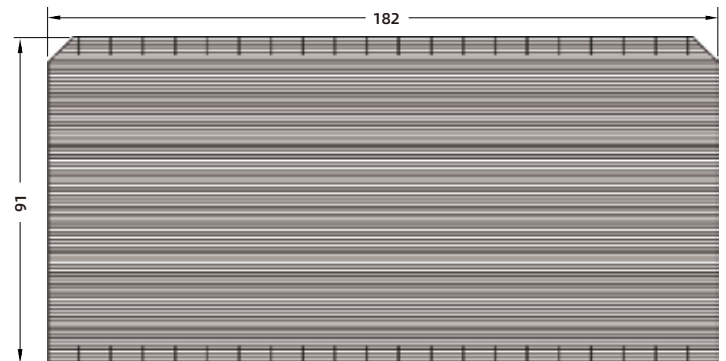

## Electrical Performance Parameters

Efficiency Range	Eff (%)	Pmpp (W)	Isc (A)	Voc (V)
JG-182M-2570	25.7	4.24	6.532	0.750
JG-182M-2560	25.6	4.22	6.530	0.750
JG-182M-2550	25.5	4.21	6.528	0.750
JG-182M-2540	25.4	4.19	6.526	0.749
JG-182M-2530	25.3	4.18	6.524	0.749
JG-182M-2520	25.2	4.16	6.522	0.749
JG-182M-2510	25.1	4.14	6.520	0.749
JG-182M-2500	25.0	4.13	6.518	0.748
JG-182M-2490	24.9	4.11	6.516	0.748

The amplitude of Voc (Isc) decreasing with irradiation intensity based on STC (1000W/m<sup>2</sup>, AM1.5, 25°C).

## Irradiation Dependence Characteristics

Irradiation (W/m <sup>2</sup> )	Voc	Isc
1000	1.0	1.0
900	0.99	0.9
800	0.99	0.8
600	0.98	0.6
400	0.96	0.4


## Temperature Coefficient

Voc	-0.243 %/°C
Isc	+0.033 %/°C
Pmax	-0.254 %/°C


## Mechanical data and Design

Dimension	182mm×91mm±0.25mm
Thickness	130μm+20μm/-10μm
Front (-)	48 sub-busbars (silver or copper clad silver), blue transparent conductive film (TCO)
Back (+)	90 sub-busbars (silver or copper clad silver), blue transparent conductive film (TCO)

## I-V Curve (25%)

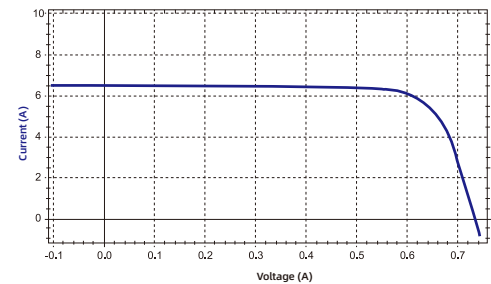

## Spectral Response

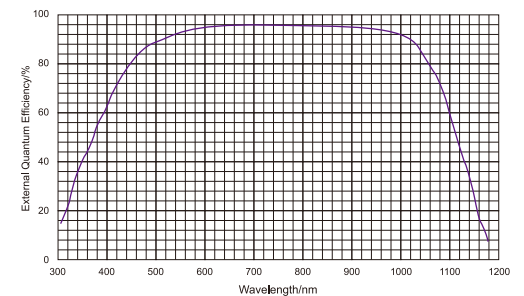

\*The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the ongoing innovation and product enhancement. Golden Solar reserves the right to make necessary adjustments to the information described herein at any time without further notice.