

# CST-M12/66H

# 660-680W PERC

132 HALF-CELL MONOFACIAL MODULE

## Characteristic



**Better light trapping and current collection**  
Improve module power output and reliability



**PID Resistance**  
Excellent Anti-PID performance guarantee via optimized mass-production process and materials control



**Optimized electrical design**  
lower operating current for reduced hot spot loss and better temperature coefficient




**Enhanced Mechanical Load**  
Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal)

**21.9%**


Max Module  
Efficiency

## Consort Linear Warranty

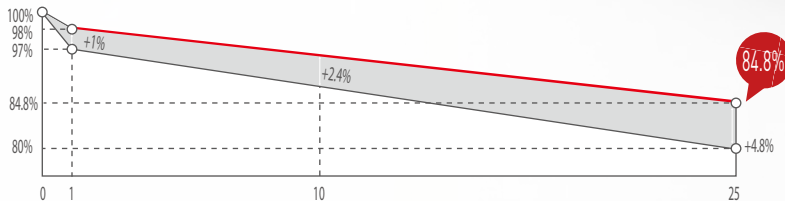


- 12 year Product Warranty
- 25 Year Linear Power Warranty
- 0.55% Annual Degradation Over 25 Years


## ENGINEERING DRAWING (mm)

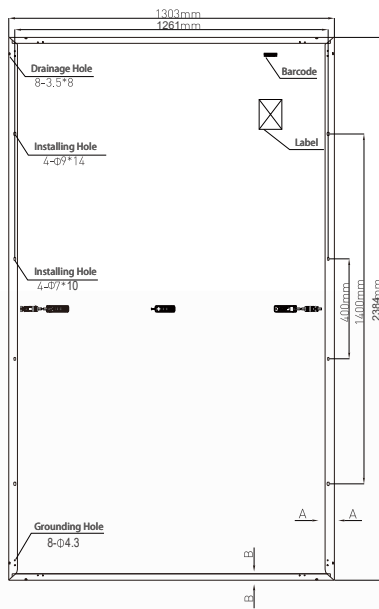


## FRAME CROSS SECTION (mm)

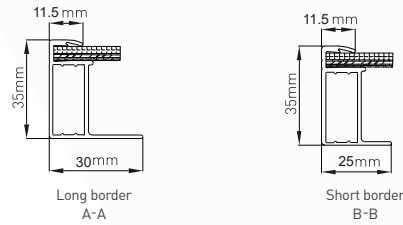

## I-V/P-V CURVE AT DIFFERENT IRRADIATION (665W)

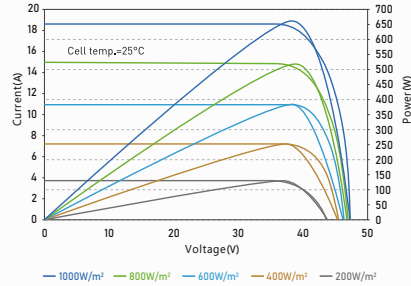

## I-V CURVE AT DIFFERENT TEMPERATURE (665W)

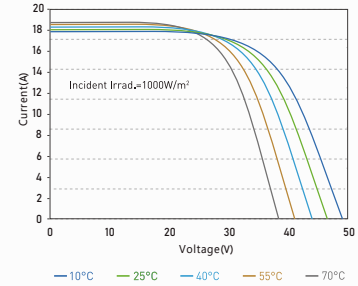

## Electrical Characteristics (STC/NMOT)

PV module model	CST-M12/66H 660		CST-M12/66H 665		CST-M12/66H 670		CST-M12/66H 675		CST-M12/66H 680	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power - Pmax(W)	660	499.4	665	503.1	670	506.9	675	510.7	680	514.6
Open Circuit Voltage - Voc(V)	45.60	42.96	45.80	43.14	46.00	43.33	46.20	43.52	46.40	43.71
Short Circuit Current - Isc(A)	18.55	14.96	18.60	15.00	18.65	15.04	18.70	15.08	18.75	15.11
Voltage at Pmax-Vmp(V)	37.80	35.26	38.00	35.45	38.20	35.64	38.40	35.82	38.60	36.01
Current at Pmax-Imp(A)	17.46	14.16	17.50	14.19	17.54	14.22	17.58	14.26	17.62	14.29
Module Efficiency-ηm(%)	21.2		21.4		21.6		21.7		21.9	
Power Output Tolerance(W)	0~+5									

STC: Irradiance 1000 W/m, Module Temperature 25°C, Air Mass AM1.5

NMOT: Irradiance 800 W/m, Ambient Temperature 20°C, Wind Speed 1m/s

## Mechanical Data

Number of Cells	210mm monocrystalline 132 pieces (66x2)
External Dimensions	2384x1303x35mm
Weight	34.2kg
Front glass	High transparency solar glass 3.2mm
Frame	Black/Silver, Anodized aluminum alloy
Junction Box	IP68 rated
Output Cables	4.0mm <sup>2</sup> , 280 mm in length, length can be customized/UV resistant
Wind/Snow Load	2400Pa/5400Pa
Connector	MC4 compatible

## Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	43±2°C
Isc Temperature Coefficient	+0.05%/°C
Voc Temperature Coefficient	-0.28%/°C
Pmax Temperature Coefficient	-0.36%/°C

## Maximum Ratings

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Voc Temperature Coefficient	30A

Power measurement error + / - 3%

## Packaging Configuration

Module per box	31 pieces
Modules per 40' container	558 pieces

# PARAMETER