
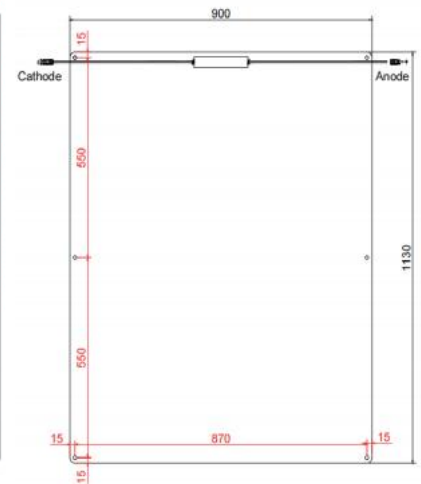


FLEXIBLE SOLAR PANEL YH200W-20M

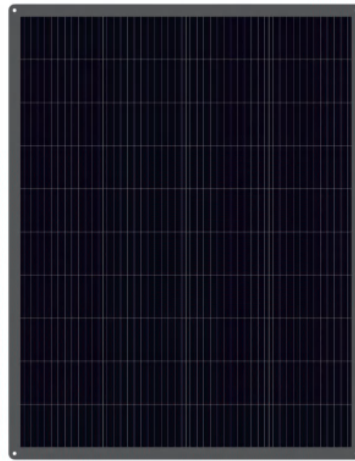

ELECTRICAL DATA

| Model Type | YH200W-20M |
|----------------------------|------------|
| Peak Power(Pmax) | 200 |
| Maximum Power Voltage(Vmp) | 22.53V |
| Maximum Power Current(Imp) | 8.88A |
| Open Circuit Voltage(Voc) | 26.56V |
| Short Circuit Current(Isc) | 9.39A |
| Module Efficiency(%) | 19.45 |

* STC: irradiance 1000 W/m², AM 1.5G, and cell temperature of 25°C

THERMAL CHARACTERISTICS & OPERATING CONDITIONS

| | |
|---|---------|
| Maximum System Voltage(V) | 1000 |
| Maximum Series Fuse Rating(A) | 10 |
| Power Tolerance | 0~+3% |
| Pmax Temperature Coefficients(W/°C) | -0.400% |
| Voc Temperature Coefficients(V/°C) | -0.330% |
| Isc Temperature Coefficients(A/°C) | +0.048% |
| NOCT Nominal Operating Cell Temperature(°C) | 45±2 |
| Operating and Storage Temperature(°C) | -40~+85 |

MECHANICAL CHARACTERISTICS

| | |
|------------------------|-----------------------------------|
| Cell Type | 210*105Mono |
| No. of Cells | 40(4*10) |
| Dimensions | 1130*900*3mm |
| Weight | 3.75kg |
| Junction box | IP65/IP67 |
| Output cables | 4mm ² cable 90cm + mc4 |
| MaxWind Load/Snow Load | 2400Pa/5400Pa |

PACKING WAY--2PCS/BOX WITH PALLET

| | |
|------------------------------|--------------------|
| 2pcs per box size | 1142 * 912 * 58mm |
| Quantity in 1*40HQ container | 984boxes / 1968PCS |
| Quantity in 1*20GP container | 444boxes / 888PCS |