

「 182mm mono PERC half-cell, high-efficiency monocrystalline module 」

585-605W 0-5W Positive Tolerance



MBB&SMBB Half-cut Cell Technology

New circuit design, lower internal current, and lower Rs loss.



High Power Density

A new generation of monocrystalline products with reduced resistive losses for greater power output.



Mechanical Properties

An aluminum frame in special design for better mechanical properties and more efficient installation.




Excellent Weather Resistance

The solar modules can meet the IEC standard requirements with strong resistant to risks such as salt spray, ammonia gas, dust, snail marks and electric potential induced attenuation.



4 Times 100% EL Detection

Guarantee no micro cracks

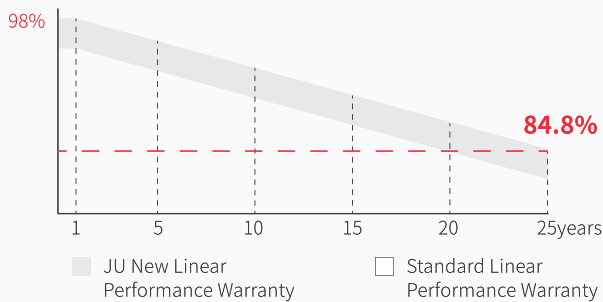

12years Material & process Warranty

25years Linear Performance Warranty

0.55% Linear Power Degradation

PRODUCT QUALITY SYSTEM & CERTIFICATION

