






Off-Grid

150W

M10 / 182mm Cell - 32 Cut cells

KEY FEATURES

-  Outstanding Power Generation
-  Anti PID/ Low LID protection
-  Lower temperature coefficient
-  Less Hot Spot Shading effects

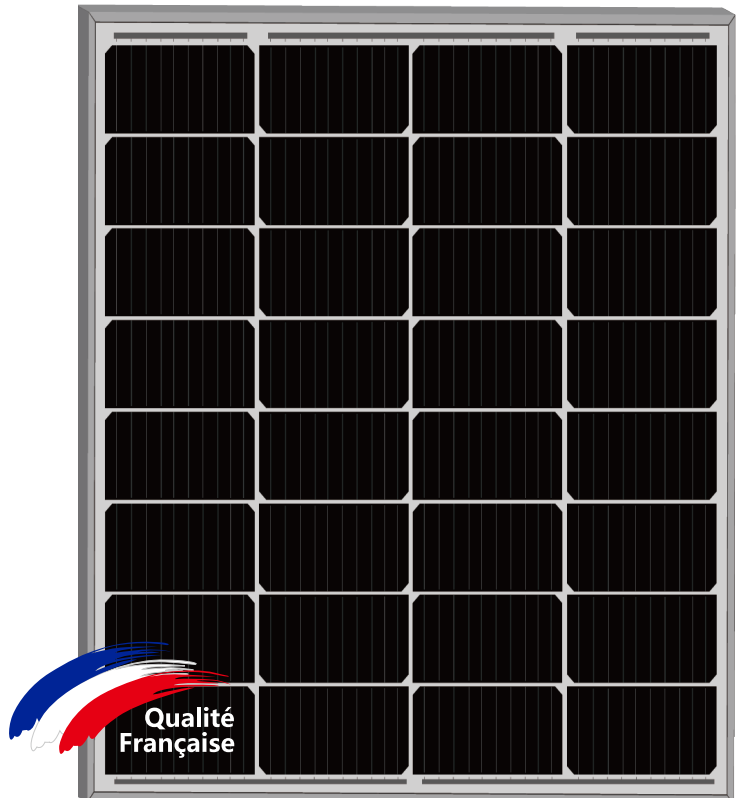

18.55%

Maximum Efficiency

0~±3%

Positive Power Tolerance

150W

Maximum Power Output

GRADE A

Cells Guaranteed

COMPREHENSIVE CERTIFICATES


IEC 61215/ IEC 61730 / IEC 61701 / IEC 62716
ISO 9001 : Quality Management Systems



LINEAR PERFORMANCE WARRANTY

12 Year Product Warranty

25 Year Linear Power Warranty

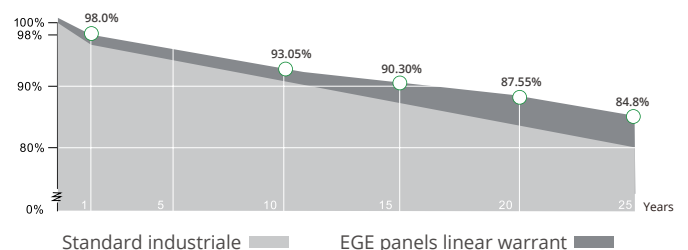


150W


Off-Grid P-type

Characteristics


IV-Curves Irradiance

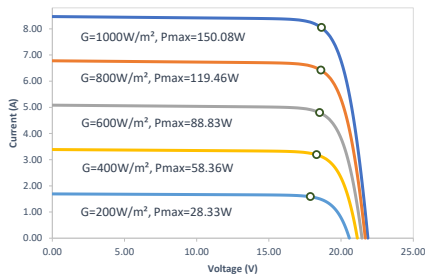

IV-Curves Temperature

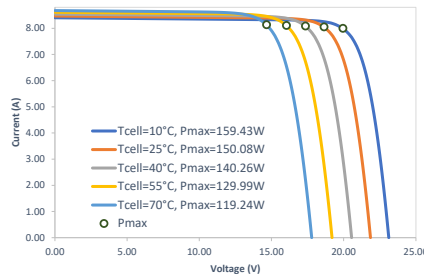

Temperature Dependence of Isc, Voc, Pmax

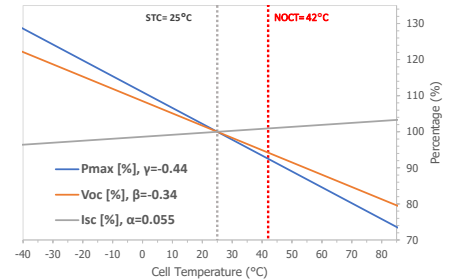

Electrical Characteristics (STC: E=1000W/m² - Tcell=25°C - AM1.5 NOCT: E=800W/m² - T=20°C - v=1m/s)

Module Type	EGE 150W 32M(M10)	
	STC	NOCT
Power output (Pmax)	150 W	110.50 W
Maximum power voltage (Vmp)	18.78 V	17.10 V
Maximum power current (Imp)	7.99 A	6.46 A
Open circuit voltage (Voc)	21.86 V	20.20 V
Short circuit current (Isc)	8.47 A	6.84 A
Power tolerance	0 ~ ± 3%	
Module efficiency	18.55 %	

Mechanical Characteristics

Cell type	Monocrystalline (182x121.33 mm)
Number of cells	32 (4x8)
Dimensions	770x1050x30mm (1.5mm Cell Gap)
Weight	8.3 kg
Glass	3.2mm, tempered glass, AR coated
Frame	Anodized aluminium alloy
Junction box	IP65 rated, 3 bypass diodes
Cable	4.0 mm ² , 900 mm (+) / 900 mm (-): Length can be customized
Connector	MC4, MC4-EVO2 compatible

Operating Condition

Operating temperature range	-40°C~+85°C
Max system voltage (IEC)	1000 VDC
Max series fuse rating	10 A
Max front load (e.g.: snow)	5400 Pa
Max back load (e.g.: wind)	2400 Pa

Packaging (Dimensions of pallet: 1080*1115*900mm)

Type	Quantity	Weight
Per Pallet	36 pcs	298.8 kg
40ft HQ Container	1584 pcs	13.15 t

Engineering Drawings

