



JS 395~415W 120M12 BB TRI-CUT

MONO 9BB ONE-THIRD CUT MODULE

▲ **1.6°C**

It's temperature is 1.6°C lower than that of the conventional module

▲ **4%**

4% more energy generation



▲ Half-Cut technique leads to increased power output

When the cells are cut into halves, the current are also halved, which enables less internal loss. Series-parallel wiring improves power performance. The working temperature of module and junction box are lower than that of conventional types, which effectively reduces the hot spot risk and reduces overall module damage.



▲ Reduced encapsulation loss due to reduced current

HC module is of lower current and lower CTM loss at around 0.2%, while the CTM loss of conventional module is 1%.



▲ Series-parallel wiring mode results in reduced shading loss

Series-parallel wiring will not only reduce power lows from shade but also improves the effective use of supports and space.




▲ Excellent temperature performance

The temperature of HC module is 1.6 °C lower than that of the conventional module under the same working condition, which results less power loss.

LINEAR PERFORMANCE WARRANTY

2-25 years decay < 0.55% annually on average

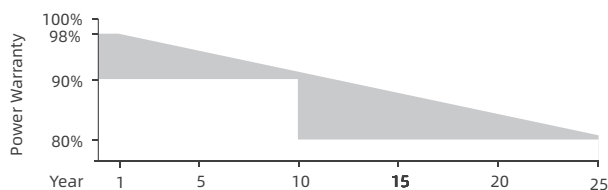

CERTIFICATES

*Certification requirements vary in different markets, please consult with JShine Solar Optronics sales team for appropriate certification.

1500v

▲ 1500V high system voltage design

ISO 9001: 2015
Quality Management System

IEC 61215 / IEC 61730

ISO 14001: 2015
Environmental Management System

OHSAS 18001: 2007
Occupational Health & Safety Managemnet System



JS 395~415W 120M12 BW TRI-CUT



ELECTRICAL PARAMETERS @ STC

Max. Power Output Pmax (W)	395	400	405	410	415
Power Tolerance	0~+3%	0~+3%	0~+3%	0~+3%	0~+3%
Max. Power Voltage Vmp (V)	34.00	34.20	34.40	34.60	34.80
Max. Power Current Imp (A)	11.62	11.70	11.77	11.85	11.93
Open Circuit Voltage Voc (V)	41.00	41.20	41.40	41.60	41.80
Short Circuit Current Isc (A)	12.21	12.28	12.34	12.41	12.48
Module Efficiency (%)	20.55	20.81	21.06	21.33	21.60

*STC (Standard Test Condition): Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5
*Measurement Tolerance (±3.0%)

ELECTRICAL PARAMETERS @ NOCT

Max. Power Output Pmax (W)	294	298	302	306	309
Max. Power Voltage Vmp (V)	31.60	31.81	31.98	32.31	32.55
Max. Power Current Imp (A)	9.31	9.37	9.43	9.47	9.49
Open Circuit Voltage Voc (V)	38.21	38.39	38.58	38.89	39.05
Short Circuit Current Isc (A)	9.86	9.92	9.97	10.01	10.06

*NOCT(Nominal Operating Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

TEMPERATURE COEFFICIENTS

Temperature Coefficients of Pmp	-0.34%/ °C
Temperature Coefficients of Voc	-0.25%/ °C
Temperature Coefficients of Isc	+0.040%/ °C

MECHANICAL PARAMETERS

Cell Type	Mono 210x70mm
Number of Cells	120pcs(5x24)
Dimensions (L*W*H)	1754x1096x30mm
Weight	21.2kg
Frame	Anodised Aluminum
Junction Box	IP67, 3 bypass diodes
Cable, Length	4.0mm ² , 300mm

OPERATING CONDITION


Maximum System Voltage(V)	1000(DC)	1500(DC)
Operating Temperature(°C)	-40~+85	
Max. Wind Load / Snow Load(pa)	2400/5400(Clamps)	4000/6000(Bolts)
Max. Over Current(A)	20	
Fire Rating	Class C	
NOCT(°C)	45±2	

PACKAGE INFORMATION



Container 40'HQ	936pcs
Quantity / Pallet	CTNR: 36pcs

www.jshine-solar.com
info@jshine-solar.com

ASSEMBLY DRAWING (Unit:mm)

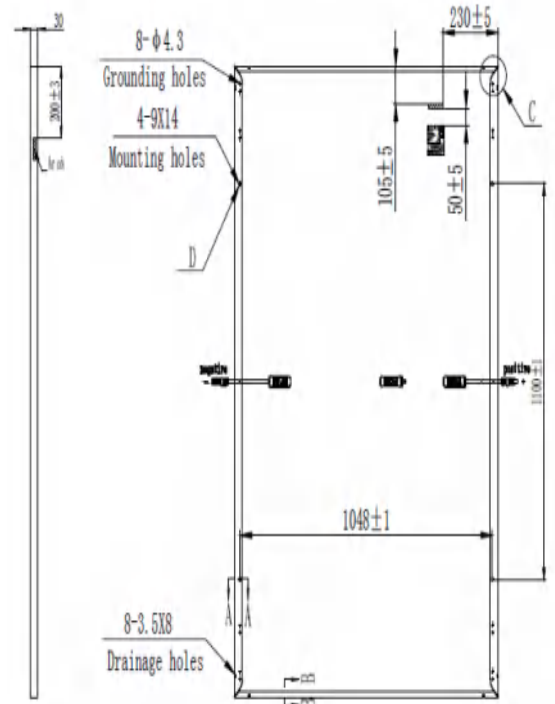

I-V Curves

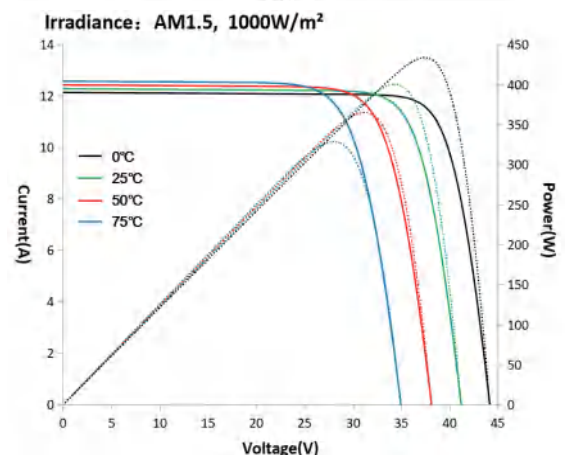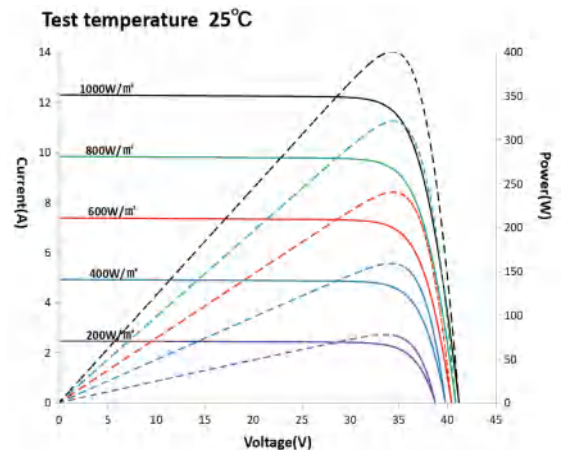

306

32.31

9.47

38.89

10.01