


# AEG

## AEG HIGH EFFICIENCY SERIES

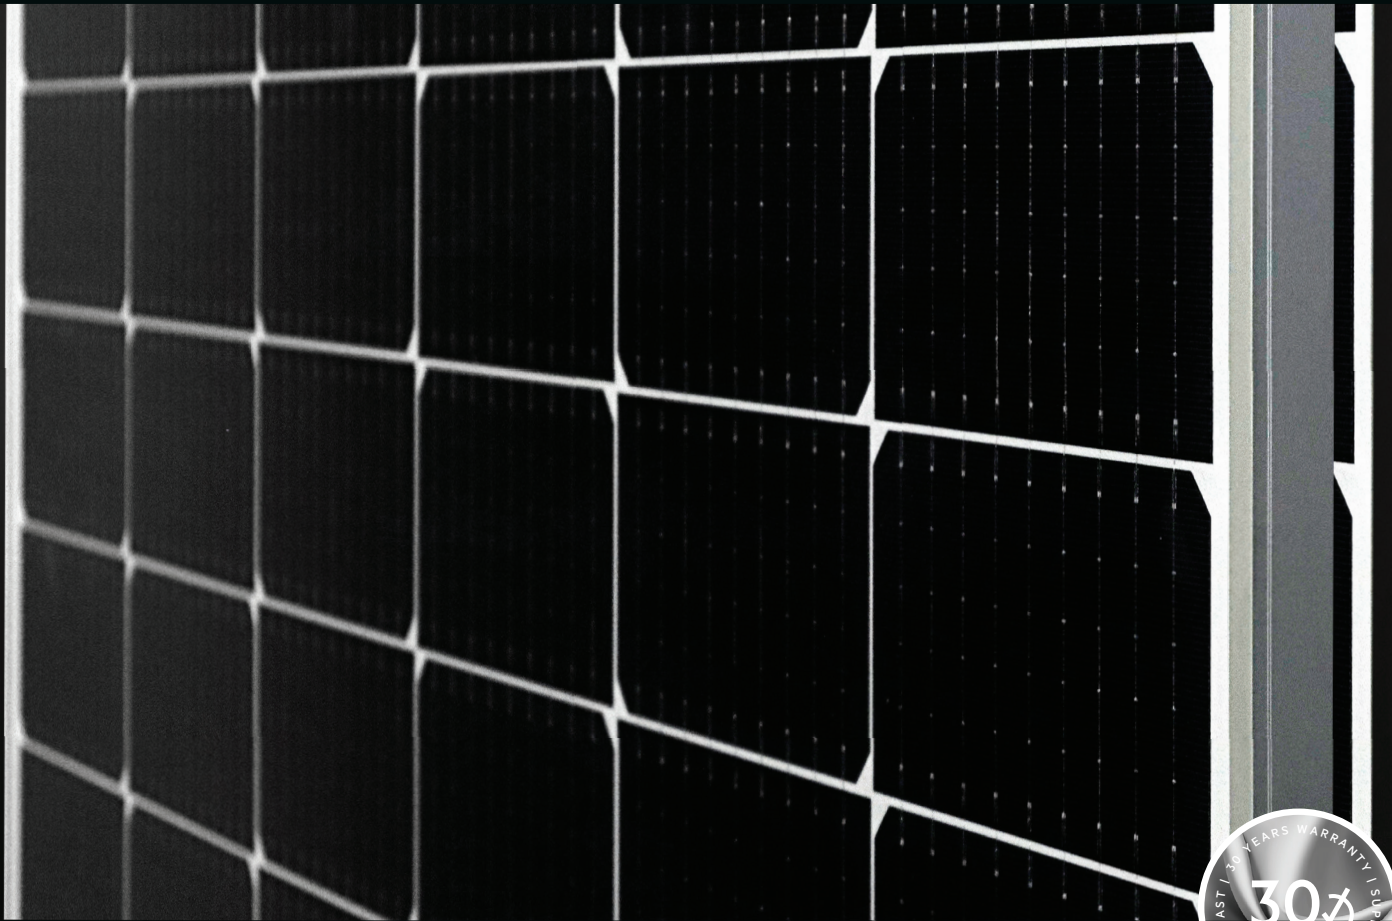

### AS-M1328-H(M10)/HV/ HALF-CUT CELL TOPCON PHOTOVOLTAIC MODULE

#### TECHNICAL CHARACTERISTICS



Power range: 520-530 Wp  
Half-Cut N-Type TOPCON cell technology  
Efficiency up to 22.32%

#### PRODUCT NAME CODE (PNC)



AS-M1328-H(M10)-520/525/530/HV  
(white backsheet, silver frame)  
AS-M1328Z-H(M10)-520/525/530/HV  
(white backsheet, black frame)

#### EXTRA PEACE OF MIND



Extensive certifications and rigorous Quality Control  
30 years product warranty  
30 years performance warranty

#### ADVANTAGES



Optimized design for more energy output  
Maximum power/efficiency  
thanks to n-type cells  
Premium look

## AS-M1328-H(M10)/HV/ HALF-CUT CELL TOPCON PHOTOVOLTAIC MODULE

PRODUCT SERIES & NAMECODE (PNC)	
AEG HIGH EFFICIENCY SERIES	
AS-M1328-H(M10)-520/525/530/HV, silver frame	
AS-M1328Z-H(M10)-520/525/530/HV, black frame	

ELECTRICAL CHARACTERISTICS AT STC <sup>1,2</sup>				
Nominal Power (Pmax)	[Wp]	520	525	530
Power Sorting <sup>3</sup>	[W]	0-5	0-5	0-5
Maximum Power Voltage (Vmp)	[V]	39.5	39.7	39.9
Maximum Power Current (Imp)	[A]	13.16	13.22	13.28
Open Circuit Voltage (Voc)	[V]	46.6	46.8	47
Short Circuit Current (Isc)	[A]	14.02	14.08	14.14
Module Efficiency (ηm)	[%]	21.90	22.11	22.32
Maximum System Voltage	[V]	1500	1500	1500
Series Fuse Maximum Rating	[A]	25	25	25

ELECTRICAL CHARACTERISTICS AT NOCT <sup>4</sup>				
Maximum Power (Pmax)	[W]	387	391	394
Maximum Power Voltage (Vmp)	[V]	37.1	37.2	37.4
Maximum Power Current (Imp)	[A]	10.44	10.49	10.54
Open Circuit Voltage (Voc)	[V]	43.7	43.9	44.1
Short Circuit Current (Isc)	[A]	11.33	11.38	11.43

MECHANICAL CHARACTERISTICS		
Solar cells	monocrystalline [pcs]	132
	Dimensions [mm]	M10 Half-cut [182 x 91]
Front glass	high-transparency	
	Thickness [mm] / [in]	3.2 / 0.126
Backsheet	White	
Encapsulant	EVA	
Frame	Anodized aluminum alloy	Silver or black
Junction box	Split-type, IP68	
	Bypass diodes	3
UV-resistant cables	Length [mm] / [in]	1300 / 51.18
	Section [mm <sup>2</sup> ]	4
Connectors	MC4 Compatible	
Dimensions	H x L x W [mm]	2094 x 1134 x 35
	H x L x W [in]	82.44 x 44.65 x 1.38
Weight	[kg] / [lbs]	26.5 / 58.41
Maximum load	Wind / Snow [Pa]	2400 / 5400
Fire Class	Class C	

PACKAGING		
Packing configuration	[pcs/pallet]	31
Loading capacity	[pcs/40 ft container]	682

NOTES
1-Standard Test Conditions (STC): Irradiance 1000 W/m <sup>2</sup> , Air Mass AM = 1.5, Cell Temperature 25°C
2-Measurement tolerances (IEC 61215:2016): Pmax±3%, Voc±3%, Isc±3%
3-AEG photovoltaic modules are classified according to a principle of positive power tolerance: the Power Output measured at STC of the delivered modules exceeds their assigned Nameplate Nominal Power
4-NOCT: Nominal operating cell temperature, Irradiance 800 W/m <sup>2</sup> , Wind Speed 1m/s; Ambient Temperature 20°C, Air Mass AM=15
5-Full text of the Warranty Terms available at: <a href="http://www.aeg-solar.com">www.aeg-solar.com</a> .
6-(HE/GB) No less than 99% of the minimum "Peak Power at STC" in the first year; power output decline no more than 0.4% per year thereafter, ending with 87.4%.
Dimensions in the technical picture are expressed in mm with tolerance ±2 mm (±0.079") / Version 2024.01.V1.EN © Solar Solutions Group. Specifications in this datasheet are subject to change without notice.
AEG is a registered trademark used under license from AB Electrolux (publ).

CERTIFICATIONS		
System	ISO 9001, ISO 14001, ISO 45001	
Product	IEC 61215, IEC 61730	

WARRANTIES		
Product warranty <sup>5</sup>	[years]	30
Performance warranty (linear) <sup>6</sup>	[years]	30

TEMPERATURE CHARACTERISTICS		
NOCT	[°C]	45 (±2)
Pmax Temp. Coefficient (γ)	[%/°C]	-0.30
Voc Temp. Coefficient (β)	[%/°C]	-0.25
Isc Temp. Coefficient (α)	[%/°C]	0.046
Operating temperature	[°C]	-40~+85

