

「 182mm mono PERC half-cell, high-efficiency monocrystalline module 」

# 400-415W 0-5W Positive Tolerance



### MBB&SMBB Half-cut Cell Technology

New circuit design, lower internal current, and lower Rs loss.



### High Power Density

A new generation of monocrystalline products with reduced resistive losses for greater power output.



### Mechanical Properties

An aluminum frame in special design for better mechanical properties and more efficient installation.




### Excellent Weather Resistance

The solar modules can meet the IEC standard requirements with strong resistant to risks such as salt spray, ammonia gas, dust, snail marks and electric potential induced attenuation.



### 4 Times 100% EL Detection

Guarantee no micro cracks

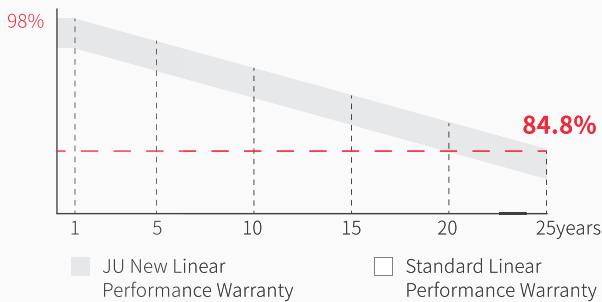


**12years** Material & process Warranty

**25years** Linear Performance Warranty

**0.55%** Linear Power Degradation

## PRODUCT QUALITY SYSTEM & CERTIFICATION

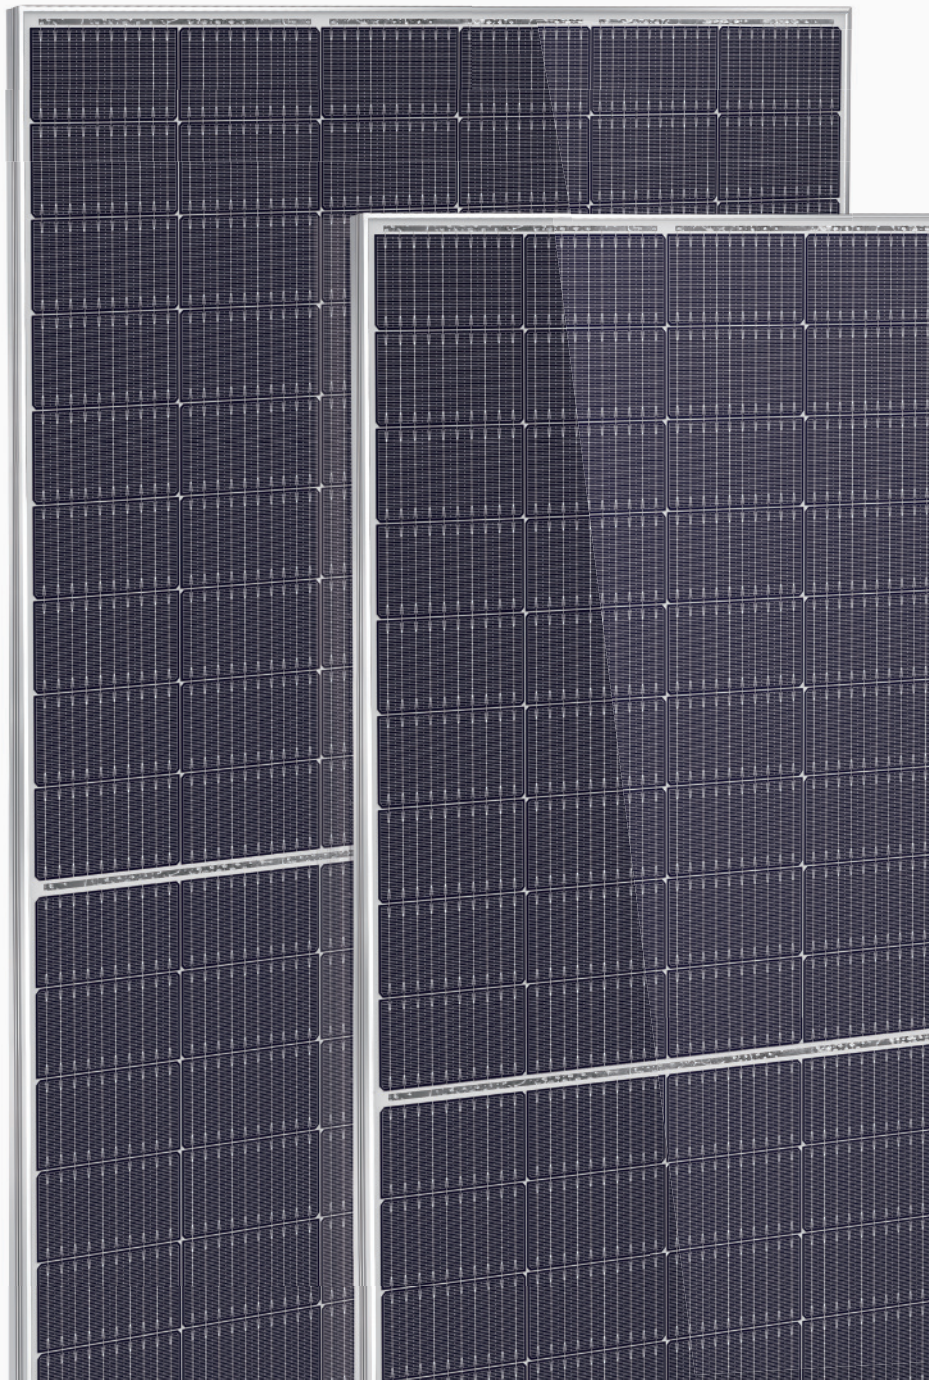

## ELECTRICAL PROPERTIES

**JU-182M-54H 108PCS**

**STC** : irradiance, 1000W/m<sup>2</sup>; cell temperature, 25°C; spectral range, AM1.5

**NOCT**: irradiance, 800 W/m<sup>2</sup>; ambient temperature, 20 °C; spectral range, AM1.5; wind speed, 1m/s

	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum power - P <sub>mp</sub> (W)	400	298	405	302	410	305	415	309
Open-circuit voltage - V <sub>oc</sub> (V)	37.18	34.95	37.33	35.09	37.68	35.42	37.83	35.56
Short-circuit current - I <sub>sc</sub> (A)	13.39	10.85	13.44	10.89	13.59	11.01	13.64	11.05
Maximum operating voltage - V <sub>mp</sub> (V)	31.42	29.22	31.55	29.35	31.84	29.61	32.13	29.88
Maximum operating current - I <sub>mp</sub> (A)	12.74	10.21	12.84	10.29	12.88	10.31	12.92	10.34
Module conversion efficiency - η <sub>m</sub>	20.48%		20.74%		20.99%		21.25%	
Power tolerance (W)	(0, +5)							
Mechanical load	Front5400Pa/Back2400Pa							
Maximum system voltage (V)	1500							
Maximum series fuse rating (A)	25							
Operating temperature	-40~+85°C							

## STRUCTURAL CHARACTERISTICS

Module dimensions(L*W*H)	1722 x 1134 x 30mm
Weight	21kg
Cell quantity	108PCS
Cell model	PERC Monocrystalline182 x 91mm
Glass	3.2mm AR, High Transmission, tempered glass
Frame	Anodized aluminium alloy
Junction box	IP68 Rated
Output line	4.0mm <sup>2</sup> , wire length 300mm
Connector	MC4 Compatible


## TEMPERATURE CHARACTERISTIC

Temperature coefficient (P <sub>max</sub> )	-0.35% / °C
Temperature coefficient (V <sub>oc</sub> )	-0.27% / °C
Temperature coefficient (I <sub>sc</sub> )	+0.05% / °C
NMOT	45±2°C

## PACKAGING


Container	40HQ
PCS / Pallet	36
PCS / Container	936

## PRODUCT ASSEMBLY DRAWING(mm)

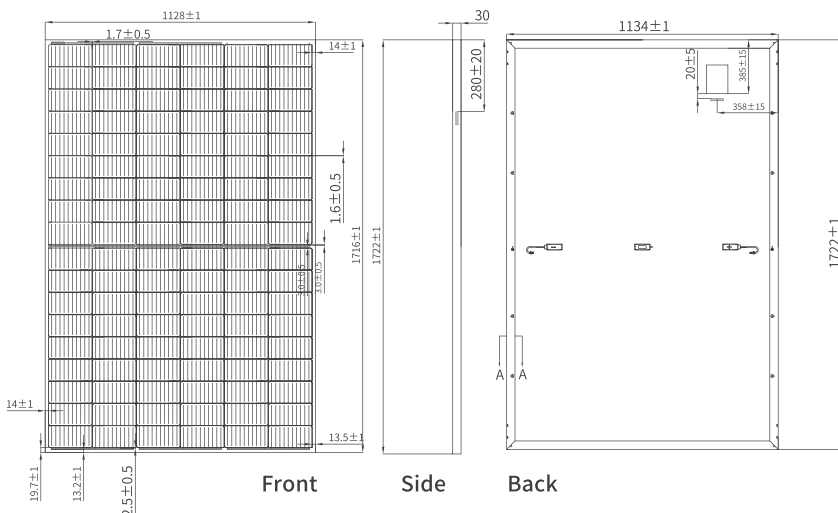


Current - Voltage & Power - Voltage Curve(415W)

— 1000w/m<sup>2</sup> — 800w/m<sup>2</sup> — 600w/m<sup>2</sup>  
— 400w/m<sup>2</sup> — 200w/m<sup>2</sup>

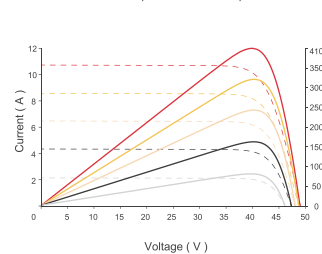

Cell Temperature Curve of I<sub>sc</sub>, V<sub>oc</sub>, P<sub>max</sub>

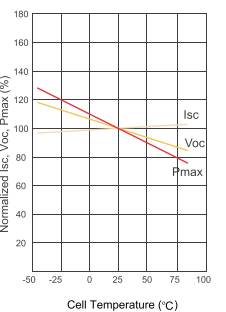

20GW ODM|OEM Solar Customization



www.jinenusolar.com



jinyou@jinenusolar.com



0086-400-888-3165



Zibo JinenU Solar Technology Co., LTD  
3005, Silk Road, Zhoucun District, Zibo,  
Shandong, China

Taizhou JinenU New Energy Co., LTD  
568, Taizhou Road, Jiangyan District, Taizhou,  
Jiangsu, China

Tai'an JinenU Solar Co., LTD  
58 Zhongtianmen Street, High-tech Zone, Tai'an,  
Shandong, China

\*Specifications included in this datasheet are subject to change without notice.

JinenU reserves the right of final interpretation. (202304V02)