

## S-series Solar Module

# 405-430W

## HIGH EFFICIENCY SHINGLED MODULE



### Shingling Technology

- Incorporating Shingling technology and flexible adhesive, give rise to high density layout



### Aesthetic Appearance

- Cells are densely packed, free of tabbing ribbons, and have uniform appearance



### Eco-friendly

- No fluorine and low lead material adopted, achieves eco-friendly PV design



### Trustworthy Quality and Reliability

- Soldering-free technology eliminates mechanical stress and potential microcrack
- Parallel circuit design lowers hot spot risk




### Lower BOS cost & Higher ROI

- Higher module efficiency reduces BOS cost and improve long term investment return

### Linear Power Output Warranty

**15** 15-year warranty for materials

**25** 25-year warranty for linear power output

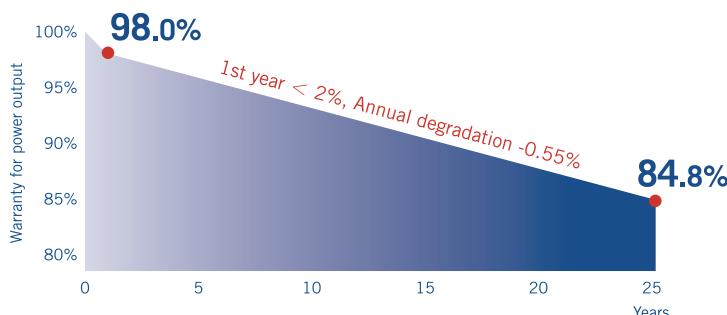

### Quality Management System and Product Certification




IEC61215/61730, IEC62804(PID), IEC61701(Salt)  
IEC62716(Ammonia), IEC60068-2-68(Sand)  
ISO 9001:2015/ quality management system  
ISO 14001:2015/ environmental management system  
ISO 45001:2018/occupation health safety management system  
ISO 50001:2011/energy management system  
IEC TS 62941-2016/PV industry quality management system

**Electrical Characteristics (STC)**

Module Type: TP405-430PMB7-44SCS	430	425	420	415	410	405
Maximum Power - Pm [W]	430	425	420	415	410	405
Open Circuit Voltage - Voc [V]	41.8	41.7	41.6	41.5	41.4	41.3
Short Circuit Current-Isc [A]	13.05	13.03	12.92	12.80	12.65	12.53
Maximum Power Voltage-Vm [V]	34.7	34.6	34.5	34.4	34.4	34.3
Maximum Power Current-Im [A]	12.40	12.30	12.19	12.08	11.97	11.86
Module Efficiency-η [%]	21.7	21.4	21.1	20.9	20.6	20.4

**Engineering Drawings**

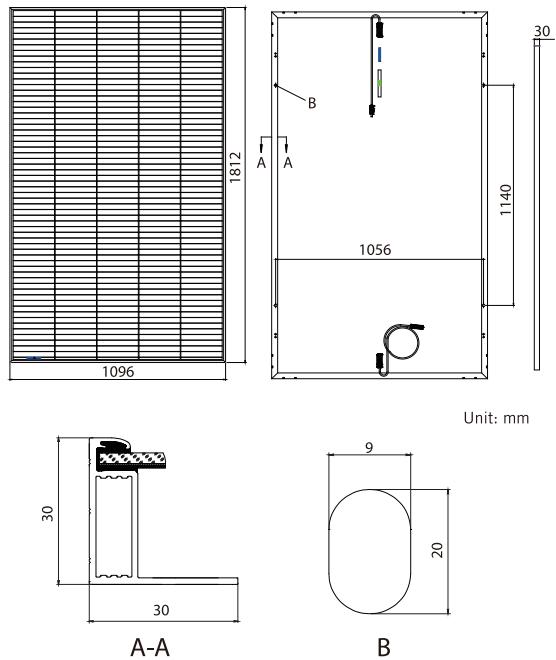

**Electrical Characteristics at NMOT**

Maximum Power-Pm	[W]	324	320	316	312	309	305
Open Circuit Voltage-Voc	[V]	39.8	39.8	39.7	39.6	39.5	39.4
Short Circuit Current-Isc	[A]	10.51	10.50	10.41	10.31	10.19	10.09
Maximum Power Voltage-Vm	[V]	33.1	33.0	32.9	32.8	32.8	32.7
Maximum Power Current-Im	[A]	9.79	9.70	9.62	9.53	9.41	9.33

Note:

1. Standard Test Conditions (STC): irradiance 1000 W/m<sup>2</sup>; AM 1.5; ambient temperature 25°C according to EN 60904-3;
2. Nominal Module Operating Temperature (NMOT): Irradiance 800W/m<sup>2</sup>; wind speed 1m/s, ambient temperature 20°C.
3. Tolerance of Pm: 0~+5W, Measuring uncertainty of power: ±3%. Performance deviation of Voc [V], Isc [A], Vm [V] and Im [A]: ±3%.

**Mechanical Characteristics**

Dimensions	1812×1096×30 mm
Weight	20.8±0.3kg
Front glass	tempered glass, 3.2mm
Frame	Anodized aluminum profile
Cells	Mono-crystalline solar cell
Cell Orientation	305(61×5)
Junction Box	IP68, two diodes
Cable	4mm <sup>2</sup> , +300mm/-1000mm(Vertical), +220mm/-180mm(Horizontal)
Packaging	924pcs/40' container (24 pallets*36pcs module/ pallet+2 pallets*30 pcs modules)



**Temperature Parameters**

NMOT	42.30°C (±2°C)
Temperature Coefficient of Voc	-0.27%/°C
Temperature Coefficient of Isc	+0.04%/°C
Temperature Coefficient of Pm	-0.34%/°C

**Maximum Ratings**

Maximum System Voltage	[V]	DC1500 (IEC)
Series Fuse Rating	[A]	25
Maximum Surface Load Capacity	[Pa]	Front 5400 / Back 2400
Temperature Range	[C]	-40~+85
Withstanding Hail	[A]	Maximum diameter of 25 mm with impact speed of 23 m/s

**I-V Curve**

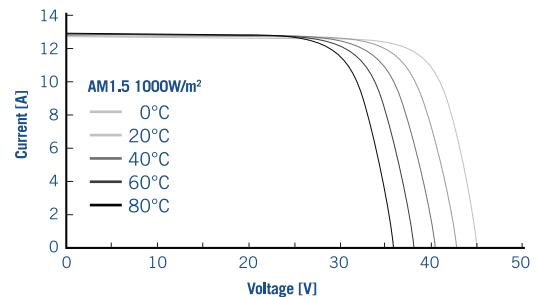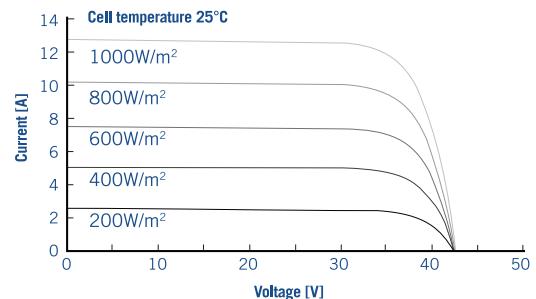

**Declaration:** With the technical progress and product updates, there exists a deviation between the technical parameter of the Topco Solar's future products and the technical parameter in this specification. The Topco Solar reserves the right to adjust the technical parameter at any time without notifying the customers. Topco Solar reserves the final right of interpretation.