

N-TYPE

SCAN CODE TO WATCH VIDEO




Learn more about the production of 182mm Mono PV Module

SKT410~430M10-108D4 410~430 Watt

182mm 16BB 108Cells All Black Double Glass Bifacial N Type Mono Half Cell PV Module Series

Sunket N Type Linear Warranty

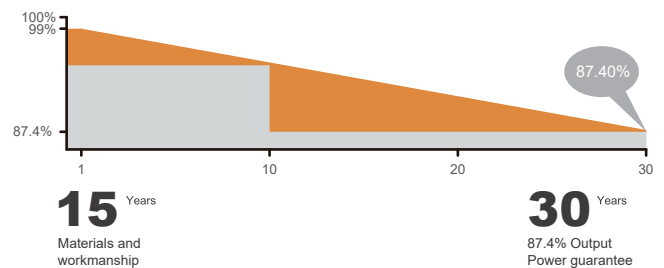

SMBB Technology
Half Cut N Type Cell



High Energy
Performance



100% Inspection
30years Guarantee



Fire Class A




5400Pa
Strengthened
Mechanical Load




Advanced Bifacial
Efficiency



 **SUNKET[®] - Solar**

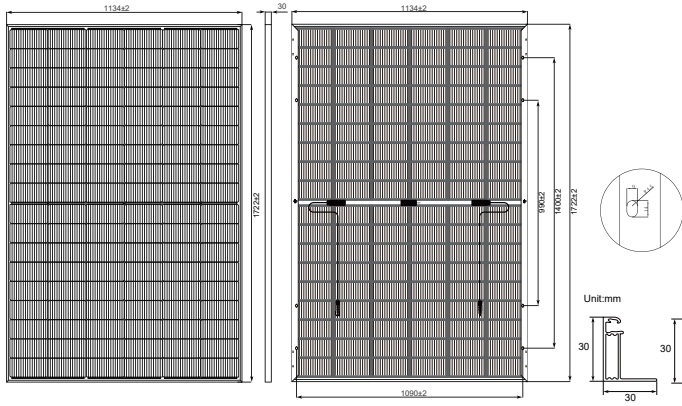

Current-Voltage & Power-Voltage Curves (SKT430M10-108D4)

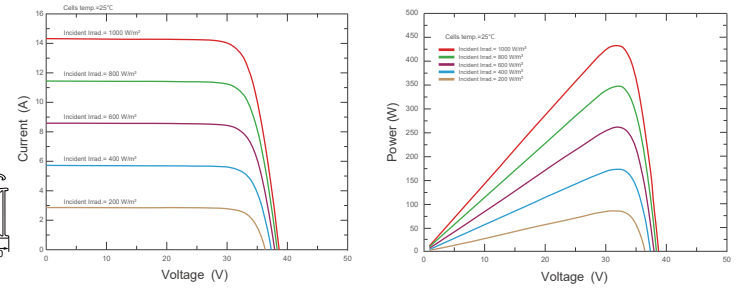

All Dimensions in mm
The above drawing is a graphical representation of the product.

Electrical Characteristics (STC/NOCT)

Module Type	SKT410M10-108D4		SKT415M10-108D4		SKT420M10-108D4		SKT425M10-108D4		SKT430M10-108D4	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Front Side										
Maximum Power- Pmax(W)	410	313.7	415	317.3	420	321.1	425	325.0	430	328.7
Open Circuit Voltage - Voc(V)	38.20	36.30	38.33	36.40	38.46	36.50	38.59	36.60	38.72	36.80
Short- Circuit Current - Isc(A)	13.49	10.97	13.60	11.05	13.71	11.13	13.81	11.22	13.91	11.28
Voltage at Pmax -Vmp(V)	31.60	29.60	31.79	29.71	31.97	29.90	32.15	30.01	32.34	30.19
Current at Pmax - Imp(A)	12.98	10.60	13.06	10.68	13.14	10.74	13.22	10.83	13.30	10.89
Module Efficiency -ηm(%)	21.00	/	21.30	/	21.50	/	21.80	/	22.00	/
Power Tolerance(W)	(0, +4.99W)									
Maximum System Voltage(V)	1500Vdc (IEC / UL)									
Maximum Series Fuse Rating (A)	30A									

STC : Irradiance 1000W/m², Cell Temperature 25°C, Air Mass 1.5

NOCT : Irradiance 800W/m², Ambient Temperature 20°C, Air Mass1.5, Wind Speed 1m/s

Mechanical Specifications

External Dimensions	1722x1134x30mm
Weight	21kg
Solar Cells	N-Type 16BB 182mm (2x54pcs)
Front Glass	AR Coated 1.6+1.6 mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68
Output Cables	4.0mm ² , 1200mm (+),1200mm (-), length can be customized
Connector	MC4 Compatible
Mechanical Load	Front Side Max. 5400Pa, Rear Side Max. 2400Pa

Temperature Characteristics

Pmax Temperature Coefficient	-0.290%/°C
Voc Temperature Coefficient	-0.250%/°C
Isc Temperature Coefficient	+0.045%/°C
Operating Temperature	-40~+85°C
Nominal Operating Cell Temperature(NOCT)	45±2°C

Bifacial Output Rear Side Power Gain

Power Gain	5%	15%	25%
Maximum Power- Pmax(W)	441.0	483.0	525.0
Open Circuit Voltage - Voc(V)	38.46	38.46	38.46
Short- Circuit Current - Isc(A)	14.42	15.79	17.16
Voltage at Pmax -Vmp(V)	31.97	31.97	31.97
Current at Pmax - Imp(A)	13.79	15.11	16.42

Packing Configuration

Pallet Dimensions	1750x1140x1254mm
Container	40'HQ
Pieces per Pallet	37
Pallets per Container	26
Pieces per Container	962