

N-Type CleanEdge GSN7S54T [420-440W]

CleanEdge TOPCON Single Glass Module



IEC 61215 / IEC 61730 / UL 61730

ISO9001: 2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018: Occupational Health And Safety Management System



KEY FEATURES



CleanEdge

No water and dust, which reduces the power loss, increases power generation by 6-15%



Lower Attenuation

Components have better reliability and lower LID/LETID attenuation



Visual all-black

All-black design, more harmonious and beautiful application scene



Wider Application

No water-permeability and high wear-resistance, can be widely used in high-humid, windy and dusty area



PID Resistance


Excellent Anti-PID performance guarantee via optimized mass-production process and materials control

Guaranteed Power Performance

25 Years Product Warranty

30 Years Linear Power Warranty

0.40% Annual Degradation Over 30 Years

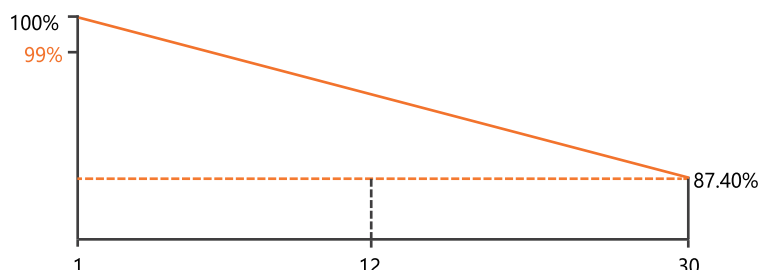

As different markets have different certification requirements, please consult our G-Star sales group to obtain the corresponding certification for the local market. If any special requirements are needed for the specific installing environment, please feel free to contact G-star technical support department anytime.

GSN7S54T

420-440W

CleanEdge TOPCON Single Glass Module

Weight


22 kg

Dimensions

1722*1134*32mm

Packaging

34pcs/pallet,884pcs/ 40'HQ Container

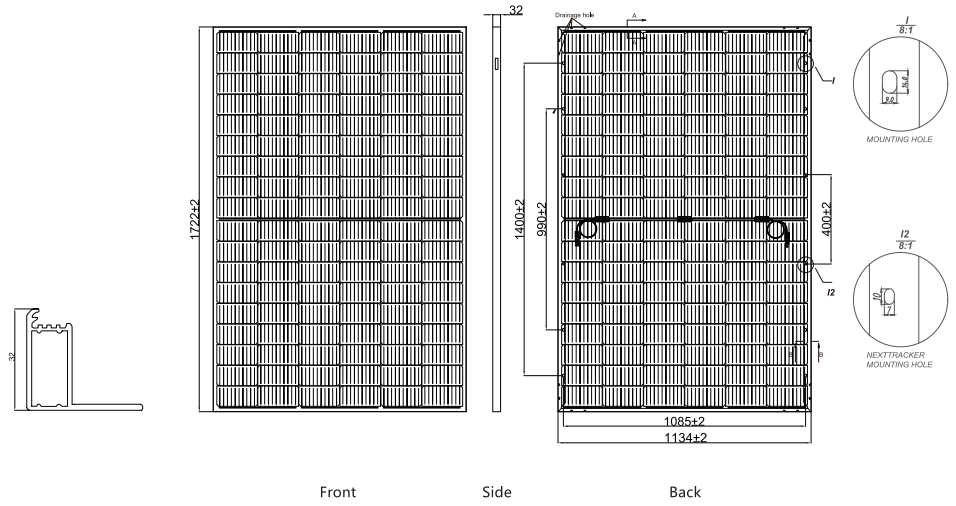

Front Side Back

OPERATING CONDITIONS

Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500V/DC(IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0~+3%
Temperature Coefficients Of Pmax	-0.30%/°C
Temperature Coefficients Of Voc	-0.25%/°C
Temperature Coefficients Of Isc	0.046%/°C
Nominal Module Operating Temperature(NMOT)	43±2°C

MECHANICAL CHARACTERISTICS

Cell Type	N type Monocrystalline 182*91mm
No. Of Cells	108 pcs in series (6x18)
Front Glass	3.2mm, Anti-Reflection Coating
Backsheet	Black
Frame	Anodized Aluminium Alloy,silver or black
Junction Box	IP68 ,3Bypass Diodes
Output Cables	300mm in legh or Customized Length
Connectors	MC4-EVO2
Mechanical Load	5400Pa(Front)/2400Pa(Back)

ELECTRICAL PARAMETERS AT STC

Module Type	GSN7S54T-420BB	GSN7S54T-425BB	GSN7S54T-430BB	GSN7S54T-435BB	GSN7S54T-440BB
Maximum Power(Pmax)	420	425	430	435	440
Maximum Power Voltage (Vmp)	31.51	31.70	31.88	32.06	32.24
Maximum Power Current (Imp)	13.33	13.41	13.49	13.57	13.65
Open-Circuit Voltage (Voc)	38.11	38.30	38.49	38.68	38.87
Short-Circuit Current (Isc)	14.07	14.15	14.23	14.31	14.39
Module Efficiency STC (%)	21.51%	21.76%	22.02%	22.28%	22.53%

STC: Irradiance 1000W/m²,AM=1.5, Cell temperature 25°C.

ELECTRICAL PARAMETERS AT NMOT

Maximum Power(Pmax)	318	322	326	330	334
Maximum Power Voltage (Vmp)	30.97	31.15	31.33	31.51	31.69
Maximum Power Current (Imp)	10.27	10.35	10.41	10.48	10.54
Open-Circuit Voltage (Voc)	37.84	38.02	38.2	38.38	38.56
Short-Circuit Current (Isc)	10.80	10.88	10.94	11.01	11.07

NMOT: Irradiation 800W/m²,AM=1.5, Cell temperature 20°C.

IV-CURVE

