


LP182*199-M-66-NB N-Type TOPCon Dual Glass

Rated Power 570-590W



N-Type MBB Cell
New circuit design N-type cells, can increase the output power of 10W~20W

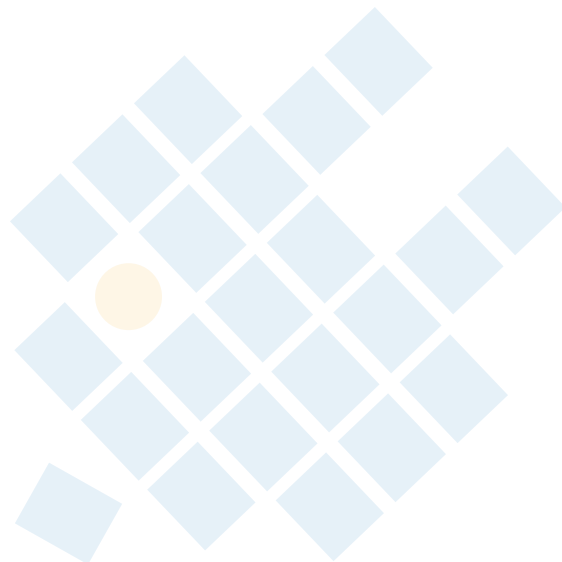

Bifacial with dual glass
Module adopts 182*199mm half cells, bifacial module provide an additional 5%~25% output.



Harsh Environmental Adaptability
Strict salt spray and ammonia corrosion test by TUV Nord.




Low Light Features
Higher performance under low light environment.



PID Protection
Ensure the attenuation probability caused by PID phenomenon is minimized.



Load Capacity
Mechanical load tests including wind load 2400 Pa and snow load 5400 Pa done by TUV Nord.

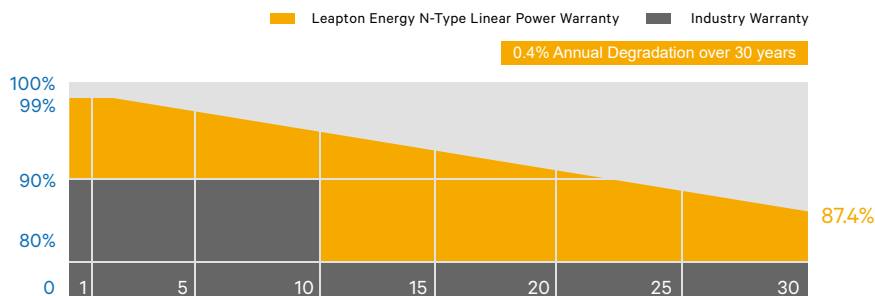

Headquarter : Leapton Energy Co., Ltd.

Tosei Bldg. 6F, 1-2-1 Aioi-cho, Chuo-ku Kobe-shi, Hyogo, 650-0025, Japan

+81-78-382-3182

www.leaptonenergy.jp

Manufacturer : Leapton Solar (Changshu) Co., Ltd.


No.9, Sunshine Avenue, Changshu City, Jiangsu, China

+86-512-88800068

info@leaptonenergy.com

www.leaptonpv.com

MECHANICAL DIAGRAMS

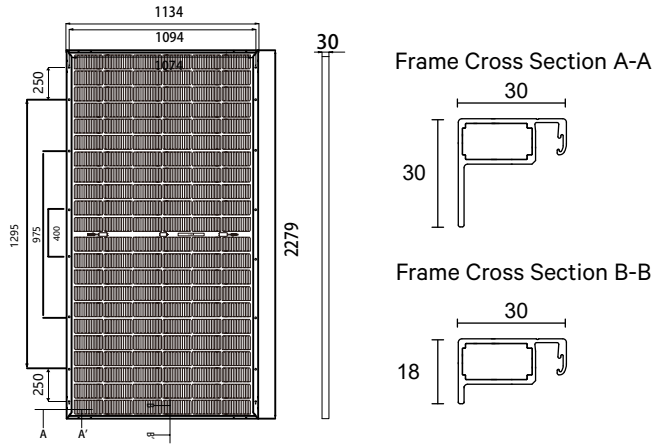

SPECIFICATIONS

Weight	32kg
Dimensions	2279mm*1134mm*30mm
Cell Dimensions	182*199mm
Cell Amount	66*2 pcs
Maximum System Voltage	1500V
Junction Box	IP68
Frame	Aluminum Alloy
Cable	4mm ² , N 1400mm/P 1400mm for Horizontal installation 4mm ² , N 300mm/P 300mm for Vertical installation
Connector	MC4 compatible
Application Level	Class A
Bifaciality	80±5%

ELECTRICAL PARAMETERS AT STC

Power	570W	575W	580W	585W	590W
Open Circuit Voltage	47.82V	48.02V	48.22V	48.42V	48.62V
Short Circuit Current	15.12A	15.17A	15.22A	15.27A	15.32A
Maximum Power Voltage	39.91V	40.11V	40.31V	40.51V	40.72V
Maximum Power Current	14.28A	14.34A	14.39A	14.44A	14.49A
Module Efficiency	22.06%	22.25%	22.44%	22.64%	22.83%

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

ELECTRICAL PARAMETERS AT NMOT

Power	429W	433W	437W	440W	444W
Open Circuit Voltage	45.44V	45.64V	45.84V	46.04V	46.24V
Short Circuit Current	12.13A	12.19A	12.23A	12.25A	12.28A
Maximum Power Voltage	34.24V	37.44V	37.64V	37.84V	38.04V
Maximum Power Current	11.52A	11.57A	11.61A	11.63A	11.67A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

ELECTRICAL PARAMETERS (AT 10% BIFACIAL POWER OUTPUT)

Output Power	627W	633W	638W	643W	649W
Open Circuit Voltage	47.82V	48.02V	48.22V	48.42V	48.62V
Short Circuit Current	16.67A	16.74A	16.81A	16.85A	16.91A
Maximum Power Voltage	39.91V	40.11V	40.31V	40.51V	40.72V
Maximum Power Current	15.71A	15.78A	15.83A	15.87A	15.94A


TEMPERATURE CHARACTERISTICS

NMOT	41±3°C	Temp Coefficient of ISC	+0.046%/°C
Temp Coefficient of VOC	-0.25%/°C	Temp Coefficient of Pmax	-0.30%/°C

PACKING CONFIGURATION

Modules/Pallet	36 Pieces	Modules/40'Container	720 Pieces
Packing Description	20 Pallets, Total=(36+36)x10=720 Pieces		

CHARACTERISTICS

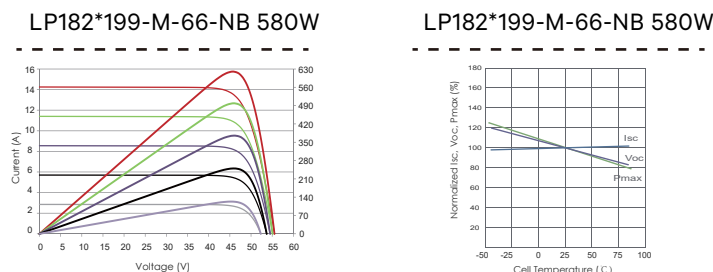

MAXIMUM RATING

Output Tolerance	0~+5W
Operating Temperature	-40°C~+85°C
Wind Load/Snow Load	2400pa/5400pa
Fuse Current	25A

