

# Honor Solar


## HY-M10/120H N-type

Monocrystalline Module  
460-490W

Cell Type



16BB(182mm)

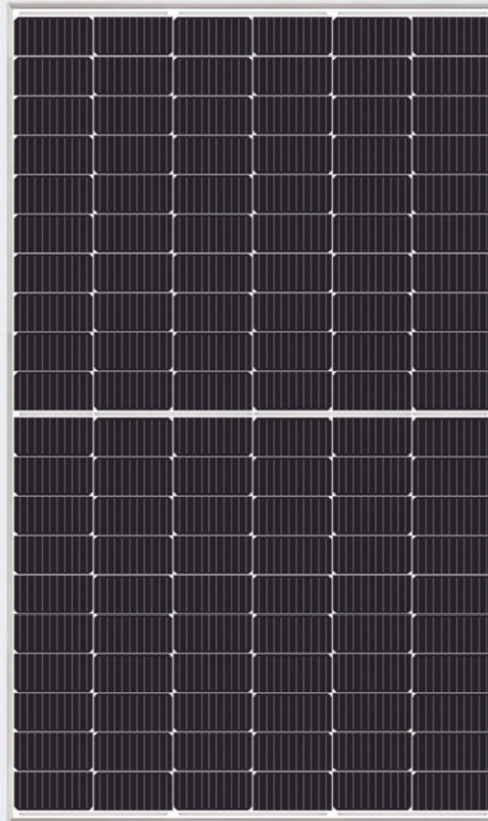

**490 W**  
Maximum Power Output

**22.7%**  
Maximum Module Efficiency

**0~+5W**  
Power Output Guarantee



Ideal choice for large scale ground installation



Selected encapsulating material and stringent production process control ensure the product is highly PID resistant and snail trails free



Special cutting and soldering technology leads to low hotspot risk



Sand blowing test, salt mist test and ammonia test passed to endure harsh environments



Optimized system performance due to module level current sorting




Highly transparent self-cleaning glass brings additional yield and easy maintenance

### Delivers Reliable Performance Over Time

- manufacturer of crystalline silicon photovoltaic modules
- Fully automatic facility and world-class technology
- Rigorous quality control to meet the highest standard: ISO9001:2015, ISO14001: 2015 and OHSAS: 18001 2007
- Tested for harsh environments (salt mist, ammonia corrosion and sand blowing test: IEC 61701, IEC 62716, DIN EN 60068-2- 68)
- Long term reliability tests
- 2x100% EL inspection ensuring defect-free modules

### Linear Performance Warranty

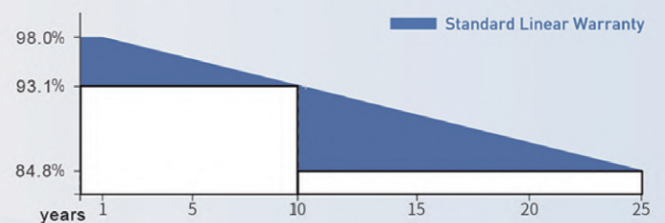

15 Years Product Warranty 25 Years Linear Power Warranty

\* Please refer to standard warranty for details

### Product certification



# HY-M10/120H

## N-type

Monocrystalline Module  
460-490W

### Electrical Specification (STC\*)

		460	465	470	475	480	485	490
Maximum Power	P <sub>max</sub> (W)	460	465	470	475	480	485	490
Maximum Power Voltage	V <sub>mp</sub> (V)	34.73	34.89	35.05	35.21	35.38	35.55	35.72
Maximum Power Current	I <sub>mp</sub> (A)	13.25	13.33	13.41	13.49	13.57	13.65	13.73
Open Circuit Voltage	V <sub>oc</sub> (V)	42.04	42.21	42.38	42.54	42.71	42.87	43.03
Short Circuit Current	I <sub>sc</sub> (A)	14.02	14.08	14.15	14.23	14.31	14.39	14.47
Module Efficiency	(%)	21.3	21.5	21.8	22.0	22.2	22.5	22.7
Power Output Tolerance	(W)	0~+5W						

\* Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, Air Mass 1.5

### Electrical Specification (NOCT\*)

		340	344	348	352	356	360	364
Maximum Power	P <sub>max</sub> (W)	340	344	348	352	356	360	364
Maximum Power Voltage	V <sub>mp</sub> (V)	32.03	32.08	32.13	32.18	32.23	32.28	32.34
Maximum Power Current	I <sub>mp</sub> (A)	10.62	10.73	10.84	10.96	11.07	11.18	11.29
Open Circuit Voltage	V <sub>oc</sub> (V)	39.32	39.38	39.44	39.51	39.57	39.74	39.91
Short Circuit Current	I <sub>sc</sub> (A)	11.32	11.42	11.53	11.62	11.73	11.82	11.93

\* Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s

### Mechanical Data

Number of Cells	120 Cells (6×20)
Dimensions of Module L*W*H (mm)	1903×1134×30mm (74.9×44.64×1.18 inches)
Weight (kg)	22.5kg
Glass	High transparency solar glass 3.2mm (0.13 inches)
Backsheet	White
Frame	Silver, anodized aluminium alloy
J-Box	IP68 Rated
Cable	4.0mm <sup>2</sup> [0.006 inches <sup>2</sup> ], 1200mm (47.2 inches)
Number of diodes	3
Wind/ Snow Load	2400Pa/ 5400Pa*
Connector	MC Compatible

\* For more details please check the installation manual

### Temperature Ratings

Nominal Operating Cell Temperature [NOCT]	44±2°C
Temperature Coefficient of I <sub>sc</sub>	+0.048%/°C
Temperature Coefficient of V <sub>oc</sub>	-0.270%/°C
Temperature Coefficient of P <sub>MAX</sub>	-0.350%/°C

### Maximum Ratings

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC -(H)
Max Series Fuse Rating	25A


### Packaging Configuration

Module per box	36 pieces
Module per 40' container	864 pieces


### Optional

Connector	MC Original
-----------	-------------


### Module Dimension

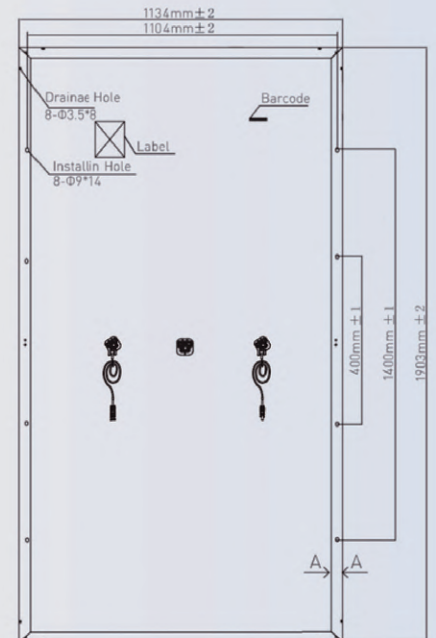

Back View



### I-V Curve at Different Temperature (465W)

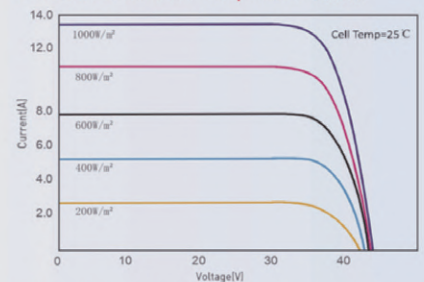

### I-V/P-V Curve at Different Irradiation (465W)

